


# Dual sensing Bay-O-Net fuse link

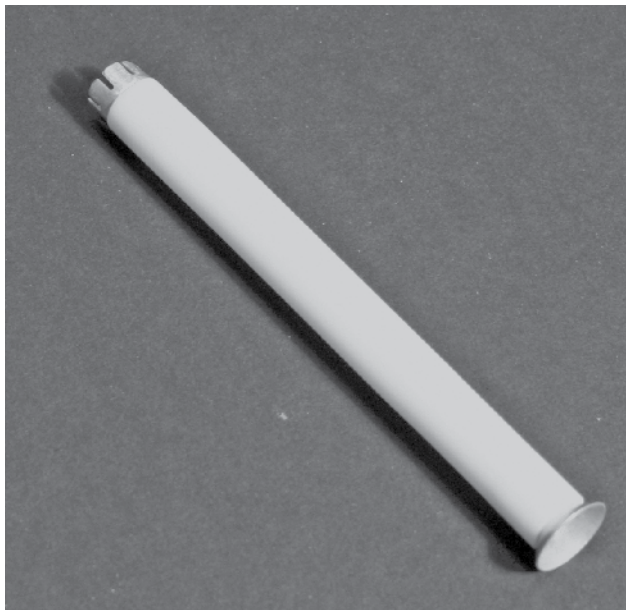

## General

Eaton protects both distribution apparatus from damaging currents and to protect distribution systems from failed apparatus with its Cooper Power series dual sensing Bay-O-Net fuse link that is used in Eaton's Cooper Power series Bay-O-Net fuse assemblies (see *Catalog CA132015EN Sidewall-Mounted and Cover-Mounted Bay-O-Net Fuse Assembly*).

Dual sensing links sense not only secondary faults, excessive load currents and transformer faults, but also transformer fluid temperature. They will limit long-term transformer heating caused by overloads and high temperature environments.

## Application

Bay-O-Net fuses can be used on single-phase conventional and self-protected distribution transformers and on three-phase equipment.

Its ideal use is in a two-fuse protection scheme with a current-limiting backup fuse. In this arrangement, secondary faults and overload currents are cleared by the Bay-O-Net fuse, and high level faults are cleared by the current-limiting fuse. The two fuses are connected in series, and are coordinated so that the current-limiting fuse operates only upon internal equipment failure. (See *Catalog CA132013EN ELSP Current-Limiting Backup Fuse* to order an ELSP current-limiting backup fuse.) If the bayonet fuse will not be used in series with a current-limiting fuse, an isolation link is required. (See *Catalog CA132012EN Isolation Link*.)

Bay-O-Net fuses are comparable in cost to internal cartridge fuses but have the advantages of being field-replaceable. Bay-O-Net fuses can easily be coordinated with upstream devices.

## Installation

No special tools are required. A hotstick is used to remove the Bay-O-Net fuse cartridge holder from non-pressurized apparatus. The fuse cartridge is then replaced, and the holder reinserted using a hotstick. Refer to *Service information MN132002EN Bay-O-Net Fuse Re-Fusing Installation Instructions* for re-fusing instructions.

**EATON**

Powering Business Worldwide

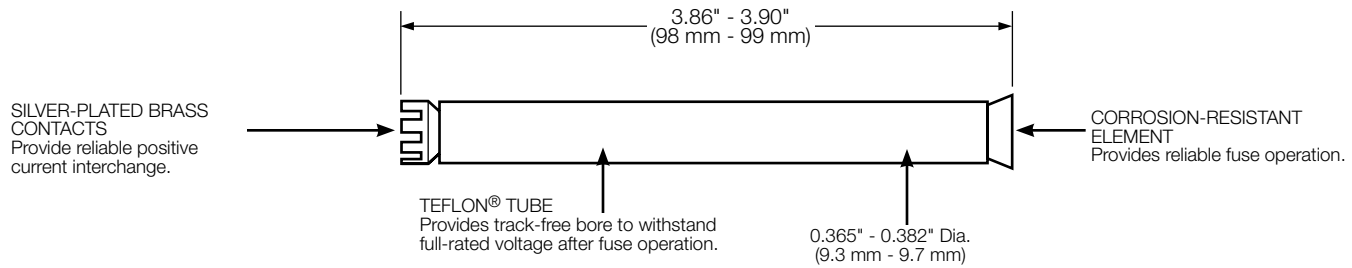


Figure 1. Dimensional and feature information.

Note: Dimensions given are for reference only.

Table 1. Electrical Ratings and Characteristics

Voltage (kV)	Catalog Number	Maximum Single-Phase Interrupting Rating*		
		Cover Mount Assembly (rms asymmetrical) in Mineral Oil	Sidewall Mount Assembly (rms symmetrical) in Mineral Oil	Sidewall Mount Assembly (rms symmetrical) in Envirotemp™ FR3™ Fluid
4.16	358C3-C14	3500 A	3500 A	3500 A
	358C16-C18	3500 A	3500 A	2000 A
8.3	358C03-C08	3500 A	3500 A	3500 A
	358C10-C12	3500 A	3500 A	2500 A
	358C14	3500 A	3500 A	1500 A
	358C16-C18	3500 A	3500 A	1200 A
15.5	358C03-C08	2500 A	2500 A	2500 A
	358C10-C12	2500 A	2500 A	1500 A
	358C14	2500 A	2500 A	1000 A
	358C16-C18	**	**	**
	358C03-C08	1000 A	1000 A	1000 A
23.0	358C10-C12	1000 A	600 A	600 A
	358C14	***	600 A	600 A
	358C16-C18	**	**	**

\* In Eaton's Cooper Power series Bay-O-Net assemblies only. Where available fault current exceeds rated value, coordinated current-limiting fusing such as an ELSP (Catalog CA132013EN) or approved equivalent must be provided.

\*\* Not rated above 8.3 kV.

\*\*\* Not rated above 15.5 kV

Table 2. Bay-O-Net Fuse Link

Continuous Current Rating (A)	Catalog Number*
3	4000358C03
8	4000358C05
15	4000358C08
25	4000358C10
50	4000358C12
65	4000358C14
100	4000358C16CB**
140	4000358C18CB**

\* Add suffix "B" to order individual fuse; add "M" to order bag of 50.

\*\* Catalog number is an integral element/cartridge/end plug design.

### Ordering information

To order a dual sensing Bay-O-Net fuse link, determine the requirements of the application from Tables 3 and 4 and specify the fuse required from Table 2.

### Method A

#### Using the correlation tables

Use the following correlation information (Tables 3 and 4) to complete Catalog Number 4000358\_\_.

For 19.9 kV single-phase and 34.5 kV three-phase applications, an ELSP current-limiting backup fuse is recommended. (See Catalog CA132013EN for more information).

If the Bay-O-Net link is not used with a current-limiting fuse, an isolation link is required. (See Catalog CA132012EN).

Correlation is based on IEEE Std C57.92™-1981 standard, Loading Guide, IEEE Std C57.109™-1993 standard, Through-Fault Guide, and Reference Data TD132001EN Pad-Mounted Transformer Fusing Philosophies.

**Table 3. Correlation Information  
Single-Phase Transformer (Phase-to-Ground) Applications**

Transformer kVA	Transformer Primary Voltage (kV)											
	2.4	4.16	4.8	7.2	7.62	8.32	12.0	12.47	13.2	13.8	14.4	
5	C03	C03	C03	C03	C03	C03	C03	C03	C03	C03	C03	C03
10	C05	C05	C03	C03	C03	C03	C03	C03	C03	C03	C03	C03
15	C08	C05	C05	C03	C03	C03	C03	C03	C03	C03	C03	C03
25	C10	C08	C08	C05	C05	C05	C03	C03	C03	C03	C03	C03
37.5	C12	C10	C08	C08	C08	C08	C05	C05	C05	C05	C05	C05
50	C12	C10	C10	C08	C08	C08	C05	C05	C05	C05	C05	C05
75	C14	C12	C12	C10	C10	C10	C08	C08	C08	C08	C08	C08
100	C14	C12	C12	C10	C10	C10	C08	C08	C08	C08	C08	C08
167	C18	C14	C14	C12	C12	C12	C10	C10	C10	C10	C10	C10
250	–	C16	C18	C14	C14	C14	C12	C12	C12	C12	C12	C12
333	–	C18a	C18	C14a	C14a	C14a	C12	C12	C12	C12	C12	C12
500	–	–	–	C18	C18	C18	C14	C14	C14	C14	C14	C14

**Table 4. Correlation Information  
Three-Phase Transformer (Phase-to-Phase) Applications**

Transformer kVA	Transformer Primary Voltage (kV)										
	2.4	4.16	4.8	8.32	12.0, 12.47	13.2	13.8, 14.4	20.8 <sup>b,d</sup>	22.9 <sup>b,d</sup>	24.9 <sup>b</sup>	
45	C10	C08	C08	C05	C03	C03	C03	C03	C03	C03	
75	C12	C10	C10	C08	C05	C05	C05	C03	C03	C03	
112.5	C14	C12	C10	C08	C08	C08	C08	C05	C05	C05	
150	C14	C12	C12	C10	C08	C08	C08	C05	C05	C05	
225	C18	C14	C14	C12	C10	C10	C10	C08	C08	C08	
300	C18	C14	C14	C12	C10	C10	C10	C08	C08	C08	
500	–	C18	C18	C14	C12	C12	C12	C10	C10	C10	
750	–	C18 <sup>a</sup>	C18 <sup>a</sup>	C18	C14	C14	C14	C12 <sup>a</sup>	C12	C12	
1000	–	–	–	C18	C14 <sup>a</sup>	C14 <sup>a</sup>	C14 <sup>a</sup>	C12 <sup>a</sup>	C12	C12	
1500	–	–	–	–	C18 <sup>c</sup>	C18 <sup>c</sup>	C18 <sup>c</sup>	C14	C14	C14	

**Note:** Recommendations are based on 200% transformer loading for 2 hours, 160% loading for 7 hours and thermal characteristics of typical Eaton's Cooper Power series transformers. Recommended fuses meet inrush requirement of 12 times transformer full load current for 0.1 second. Bay-O-Net fuse links alone should not be used at voltages greater than 17100 V for delta configurations or 24940 gnd Y/14400. For applications through 23 kV delta or 34500 gnd Y/19920, a 23 kV rated ELSP fuse (Catalog CA132013EN) is recommended in series with the Bay-O-Net link. Do not use fuse links 4000358C16CB or C18CB for voltages greater than 8320 V for delta configurations or 14400 gnd Y/8320.

- a. Recommended fuse will result in some loss of overload capacity.
- b. Recommended fuse limited to gnd Y/gnd Y transformer with less than 50% delta loading.
- c. Recommended fuse limited to gnd Y primary.
- d. For voltages greater than 17100 V for delta configurations or 24940 gnd Y/14400 and through 23 kV delta or 34500 gnd Y/19920, an ELSP 23 kV rated current-limiting back-up fuse (Catalog CA132013EN) in series with the Bay-O-Net fuse link is recommended.

## Method B

### Using time-current curves

To determine or confirm the dual sensing Bay-O-Net fuse that will coordinate with upstream and downstream system requirements, use time-current characteristic curves and specify the fuse indicated from Table 2.

Long term overload curves for selected transformer ratings are also available.

For full size TCC curves R240-91-51, long term overload curves and further information regarding either of these ordering methods, contact your Eaton representative.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

**Eaton's Cooper Power Systems Division**  
2300 Badger Drive  
Waukesha, WI 53188  
United States  
Cooperpower.com

© 2015 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. CA132010EN

Eaton and Cooper Power are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use these trademarks without the prior written consent of Eaton.  
IEEE Std C57.92™-1981 and Std C57.109™-1993 standards are trademarks of the Institute of Electrical and Electronics Engineers, Inc., (IEEE). This publication is not endorsed or approved by the IEEE.  
Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.  
Envirotemp™ and FR3™ are licensed trademarks of Cargill, Incorporated.

For Eaton's Cooper Power series Bay-O-Net fuse link product information call 1-877-277-4636 or visit: [www.cooperpower.com](http://www.cooperpower.com).