


NOTES:

1. DIMENSIONS SUBJECT TO +/- 3% TOLERANCE
2. LEAKAGE DISTANCE (Inches) - 25.2
3. ALTITUDE 0-12000 FT. ABOVE SEA LEVEL
4. WEIGHT OF UNIT INCLUDING HARDWARE - 5.6 LB.
5. MAXIMUM CONTINUOUS LINE-TO-GROUND OPERATING VOLTAGE 15.3 kV MCOV
6. VOLTAGE RATING 18 kV RMS.
7. 1/2-13 HEX NUT & LOCKWASHER PROVIDED WITH SHIPMENT.

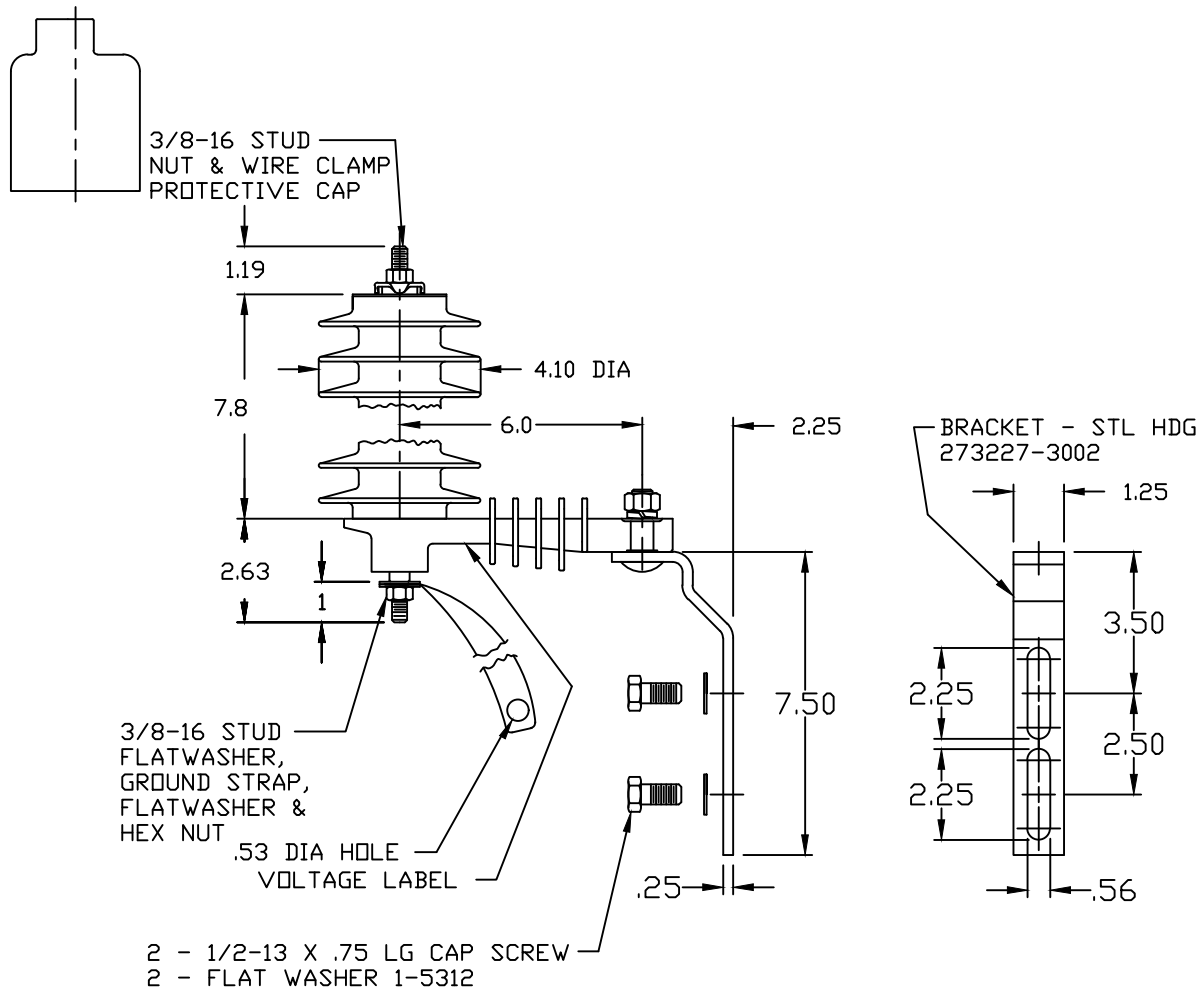

MAXIMUM DISCHARGE VOLTAGE (kV)						
FDW	SWITCHING SURGE	8/20 LIGHTNING IMPULSE				
10 kA	500 A	1.5 kA	3.0 kA	5 kA	10 kA	20 kA
63.1	41.7	45.6	48.8	51.7	56.4	64.1

DISTRIBUTION ARRESTER IEEE HEAVY DUTY IEC DH CLASS	CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	 HUBBELL® POWER SYSTEMS				
		TITLE PDV-100 OPTIMA 15.3 KV MCOV				
REV DATE 06/16/25		SIZE S	DWG NO. ALES50XX	CAT / PART / ASSY NO. 213715-5235		REV 56
		DO NOT SCALE THIS DRAWING	DRN BY NON	DATE 06/17/00	SHEET 1 OF 1	