



==NOTES==

1. MATERIAL: LOW CARBON STEEL.
2. HOT DIP GALVANIZED AFTER FABRICATION PER ASTM A153-(LATEST REVISION).
3. BOLT AND NUT ASSEMBLY MEETS THE MINIMUM ANSI TENSILE LOAD OF 13,550 LBS. AND THE 180° BEND TEST.

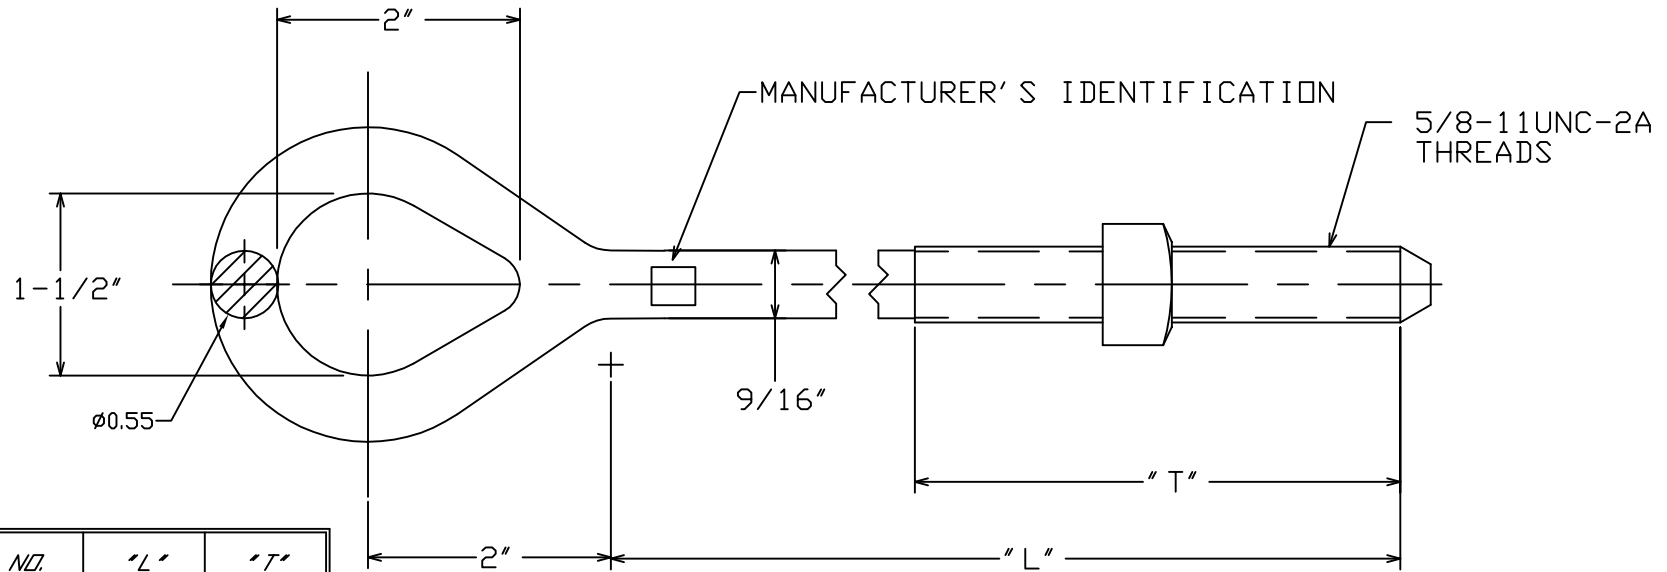

CAT. NO.	"L"	"T"
29956	6	4
29958	8	4
29959	9	4
29960	10	6
29962	12	6
29964	14	6
29966	16	6
29968	18	6
29970	20	6
29972	22	6
29974	24	6
2997026	26	6

CHANCE® TOLERANCE CHART EC 08345		 HUBBELL® POWER SYSTEMS	
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.		TITLE 5/8" OVALEYE BOLT	
SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
SB SA29956	SEE CHART		E
DO NOT SCALE THIS DRAWING	DRN BY WILSON	DATE 11/20/13	SHEET 01 OF 01