
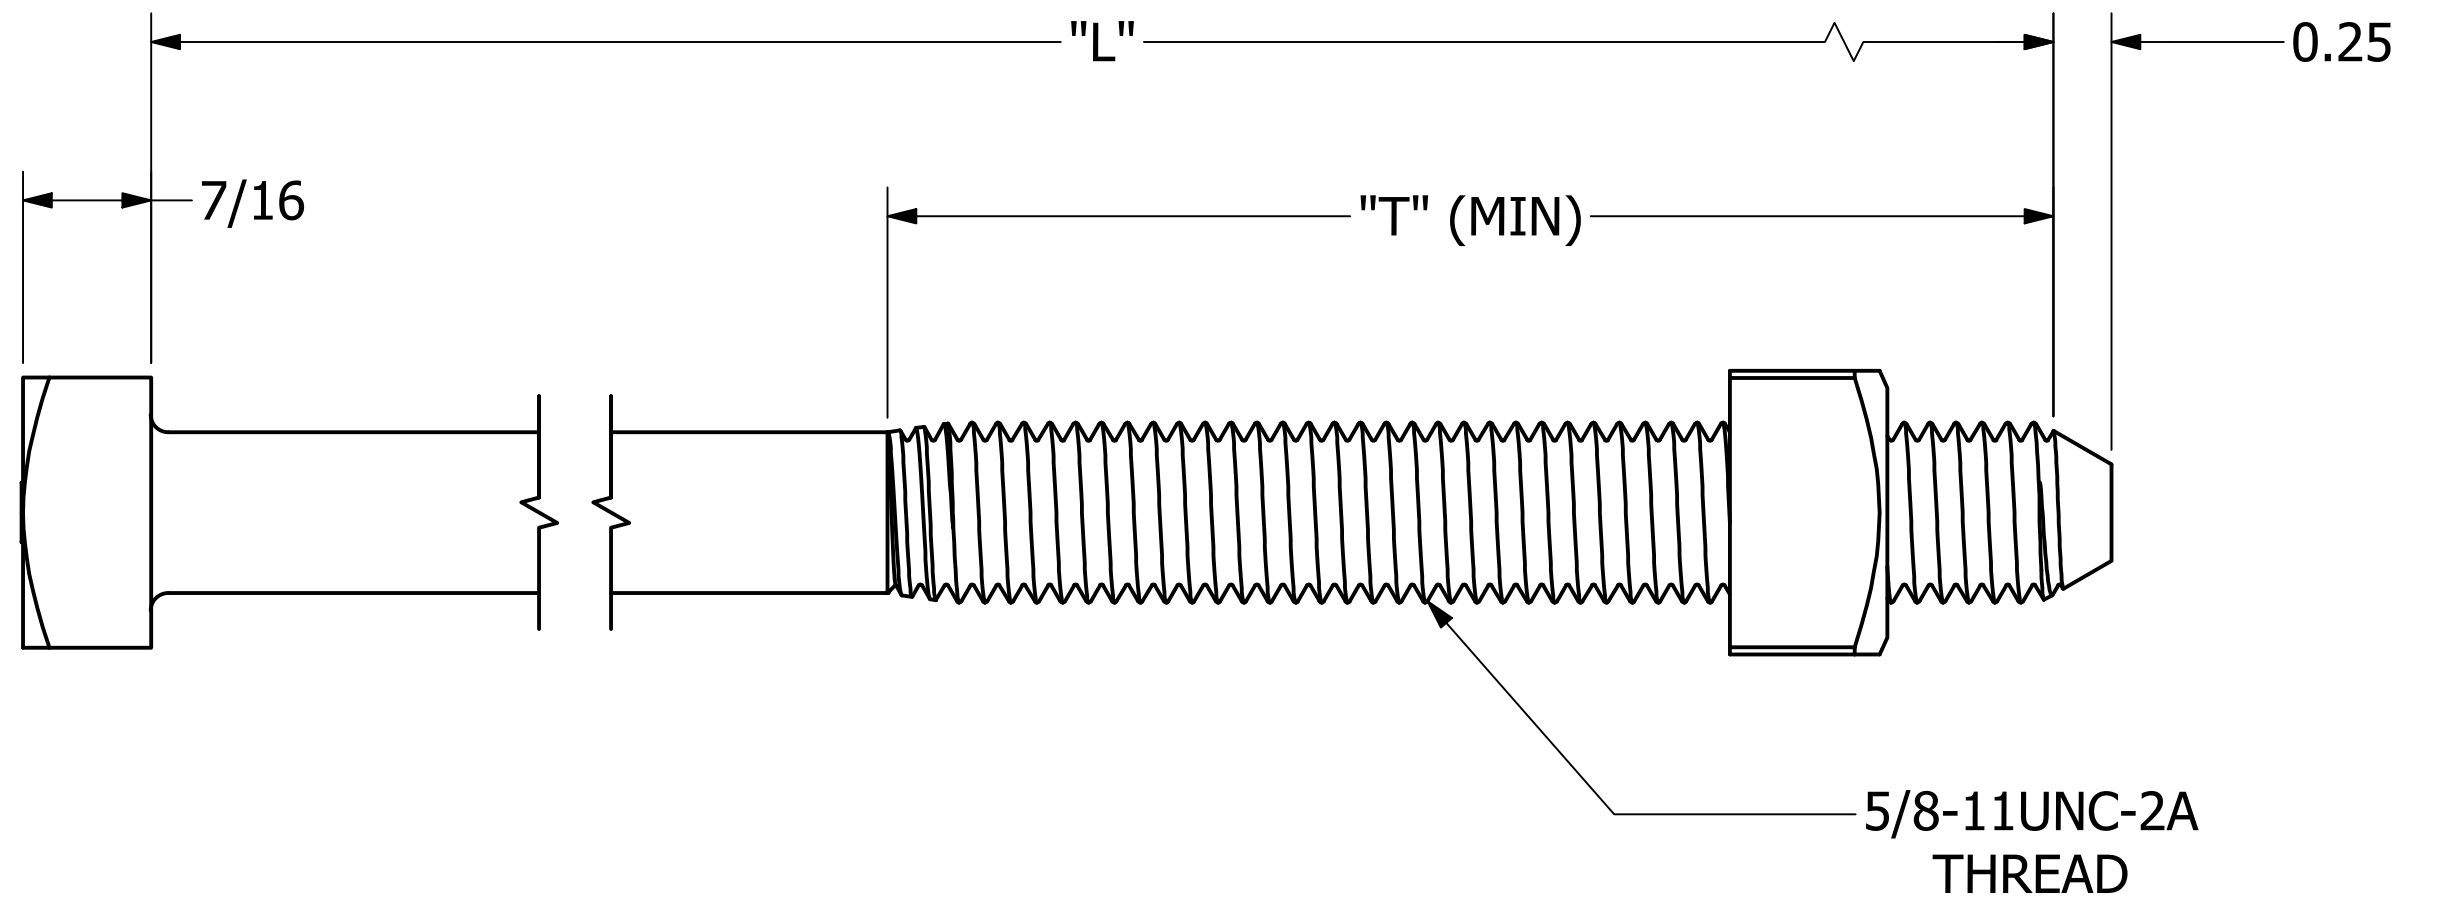


MANUFACTURER'S IDENTIFICATION

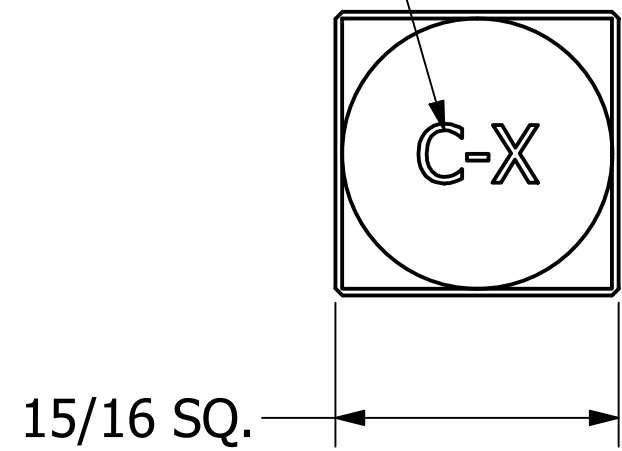

CATALOG NUMBER	USA PART NUMBER	"L"	"T"
8802		2	1.5
880212		2.5	2.25
PS8803		3	1.5
8804		4	3
8805		5	3
8806		6	3
8807		7	4
8808	8808USA	8	4
8809	8809USA	9	4
8810	8810USA	10	6
8812	8812USA	12	6
8814	8814USA	14	6
8816	8816USA	16	6
8818	8818USA	18	6
8820	8820USA	20	6
8822	8822USA	22	6
8824	8824USA	24	6
8826	8826USA	26	6
8828	8828USA	28	6
8830	8830USA	30	6
8832	8832USA	32	6

- NOTES -

1. MATERIAL: STEEL
2. FINISH: HOT DIP GALVANIZED PER ASTM A153
3. STRENGTH AND DIMENSIONS PER ANSI/IEEE C135.1 INCLUDING THE FOLLOWING:
-MINIMUM ASSEMBLY TENSILE STRENGTH 12.400 LBS.
4. CATALOG NUMBERS WITH A "USA" SUFFIX HAVE ALL COMPONENTS MELTED AND MANUFACTURED IN THE USA.

CHANCE [®]	HUBBELL [®] HUBBELL POWER SYSTEMS, INC.		
	POWER SYSTEMS, INC.		
TITLE			
5/8 MACHINE OR CROSSARM BOLT			
SIZE	CAT / PART / ASSY NO.	DWG NO.	REV
C	SEE TABLE	SA8802	F
DO NOT SCALE THIS DRAWING	DRN BY HOEK	DATE 10/22/20	SHEET 1 OF 1

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.