
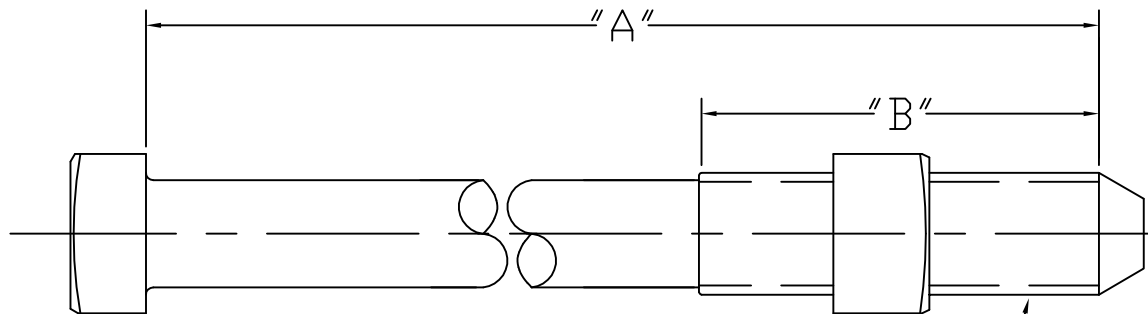


MANUFACTURER'S  
SYMBOL OR ID




7/8-9UNC-2A  
ROLLED THREADS OR  
CUT THREADS

ASSY NO.	DESCRIPTION	"A"	"B"
PSSB780200	7/8 MACH OR CROSSARM BOLT	2"	2"
PSSB780250	7/8 MACH OR CROSSARM BOLT	2.5"	2"
PSSB780300	7/8 MACH OR CROSSARM BOLT	3"	1.6"
PSSB780400	7/8 MACH OR CROSSARM BOLT	4"	2"
PSSB780500	7/8 MACH OR CROSSARM BOLT	5"	2.5"
PSSB780600	7/8 MACH OR CROSSARM BOLT	6"	2.5"
PSSB780700	7/8 MACH OR CROSSARM BOLT	7"	3"
PSSB780800	7/8 MACH OR CROSSARM BOLT	8"	3"
PSSB781000	7/8 MACH OR CROSSARM BOLT	10"	6"
DF5B12	7/8 MACH OR CROSSARM BOLT	12"	6"
C2050254	7/8 MACH OR CROSSARM BOLT	14"	6"
C2050255	7/8 MACH OR CROSSARM BOLT	16"	6"
C2050256	7/8 MACH OR CROSSARM BOLT	18"	6"
C2050257	7/8 MACH OR CROSSARM BOLT	20"	6"
C2050258	7/8 MACH OR CROSSARM BOLT	22"	6"
DF5B24	7/8 MACH OR CROSSARM BOLT	24"	6"
PSSB782600	7/8 MACH OR CROSSARM BOLT	26"	8"
PSSB782800	7/8 MACH OR CROSSARM BOLT	28"	8"
PSSB783000	7/8 MACH OR CROSSARM BOLT	30"	8"
PSSB783200	7/8 MACH OR CROSSARM BOLT	32"	8"
PSSB783400	7/8 MACH OR CROSSARM BOLT	34"	8"
PSSB783600	7/8 MACH OR CROSSARM BOLT	36"	8"
PSSB783800	7/8 MACH OR CROSSARM BOLT	38"	8"
PSSB784000	7/8 MACH OR CROSSARM BOLT	40"	8"
PSSB784200	7/8 MACH OR CROSSARM BOLT	42"	8"

-NOTES-

1. HOT DIP GALVANIZE PER ASTM A153 (LATEST REVISION).
2. ALL BOLTS AND NUTS MEET REQUIREMENTS OF ANSI C135.1 AND NEMA STD. PH101.
3. TENSILE STRENGTH OF 25,400 LB. MIN.

CHANCE TOLERANCE CHART		 <b>HUBBELL POWER SYSTEMS</b> POWER SYSTEMS, INC.	
<small>CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.</small>			
TITLE 7/8 MACHINE BOLT OR CROSSARM BOLT			
SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
SB	SA2050254	SEE CHART	C
DO NOT SCALE THIS DRAWING	DRN BY WILSON	DATE 04/29/14	SHEET 1 OF 1