
NOTES:

- 1.) MATERIAL: STEEL, HOT DIP GALVANIZED PER ASTM A153.
- 2.) ASSEMBLED COMPLETE AS SHOWN.

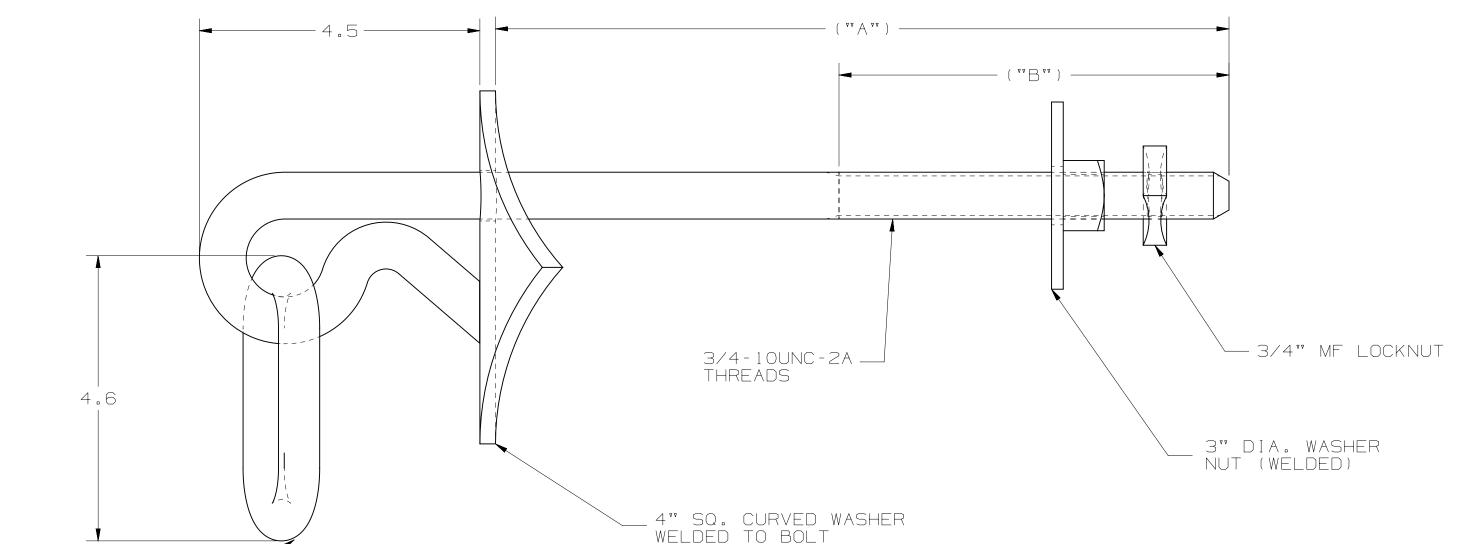

$\forall \forall \land \land \forall \forall$	\triangledown ∇ ∇
12"	6 **
14 **	7 🕶
16**	8 **
18**	9 **
	12°° 14°°

5/8" DIA. LINK-

	2.) ASSEMBLED	COMPLETE A	S SHOWN.	NS NS
(^{¬¬} A ^{¬¬}) —		-		SIVE
-	(°° B °°) —————————————————————————————			EXCLUSIVE OR INC.
				S ARE CONFIDENTIAL AND THE PUBLICATION, DISTRIBUTION BY HUBBELL POWER SYSTEMS, RIGHTS RESERVED UNDER THE COP
				AL ANI STRIBU R SYSI
				NENTI NENTI NEDU
				CONF I CATIC JBBELL RESEF
- 1 OUNC - 2A		3/4**	MF LOCKNUT	S ARE PUBL I BY HU RIGHTS
EADS				CONTENTS INC: NO CONSENT SHED; ALL F
			WASHER DED)	TS CON
CURVED WASHER				SYSTEMS, VRITTEN UNPUBLISH
TO BOLT				DRAWING , POWER S' WITHOUT , SYSTEMS, (
LATEST EC NO:	REV. DATE	CHANGED BY	RESP ENGINEER	HUBBELL POWER
64271	C 03/07/1		HINKLE	
		DO NOT SCALE THIS	THIRD ANGLE PROJECTION ISO DUAL DIMENSI	CONFIDENTIAL: PROPERTY OF H COPIES MAY BE COPIES HUBBELL
			INSTRUCT, MM=MILLIN	METER LUM NI O
DRN BY: DATE TITLE: JJL 08-13-10 Sh	HIELD WIRE	SUPPORT	BRACKET	SIZE ZOLO
HUBBELL POWER SYSTEMS		CAE DWG NO:	2060820	