


## Ridge Pin (Pole Top Pin)



**NYLON  
THREAD  
OPTION**

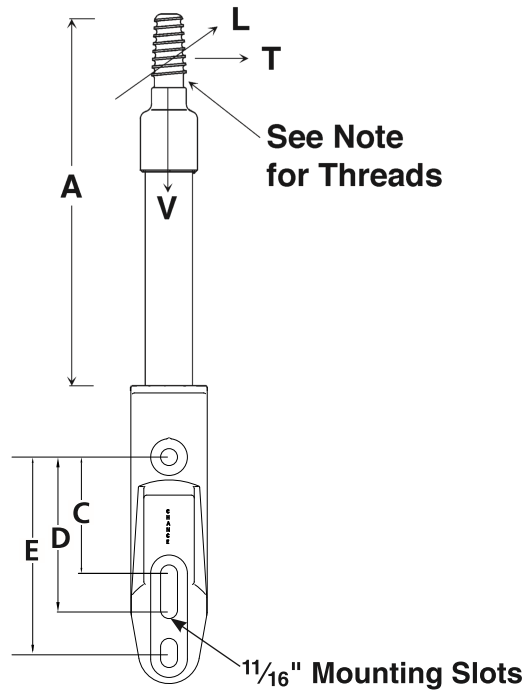

See Note  
for Threads

Base and End Fitting  
are hot-dip-galvanized  
ductile iron.

- C Dimension is 5"
- D Dimension is 6"
- E Dimension is 8"

Catalog Number	Length A	Minimum Ultimate*			Weight (Each)
		Vertical V	Longitudinal L	Transverse T	
<b>Medium Duty 1½" (38 mm) Dia. Fiberglass Rod</b>					
RPM121	12" (30.5 cm)	2500 lbs. (1134 kg)	1700 lbs. (771 kg)	1700 lbs. (771 kg)	5.4 lbs. (2.4 kg)
RPM131	13" (33.0 cm)	2500 lbs. (1134 kg)	1600 lbs. (726 kg)	1600 lbs. (726 kg)	5.5 lbs. (2.5 kg)
RPM151	15" (38.1 cm)	2500 lbs. (1134 kg)	1500 lbs. (680 kg)	1500 lbs. (680 kg)	5.8 lbs. (2.6 kg)
RPM181	18" (45.7 cm)	2500 lbs. (1134 kg)	1400 lbs. (635 kg)	1400 lbs. (635 kg)	5.9 lbs. (2.7 kg)
RPM211	21" (53.3 cm)	2500 lbs. (1134 kg)	1200 lbs. (544 kg)	1200 lbs. (544 kg)	6.3 lbs. (2.9 kg)
RPM241	24" (61.0 cm)	2500 lbs. (1134 kg)	1100 lbs. (499 kg)	1100 lbs. (499 kg)	8.8 lbs. (4.0 kg)
<b>Heavy Duty 2" (51 mm) Dia. Fiberglass Rod</b>					
RPH121	12" (30.5 cm)	2500 lbs. (1134 kg)	2200 lbs. (998 kg)	2200 lbs. (998 kg)	9.8 lbs. (4.4 kg)
RPH181	18" (45.7 cm)	2500 lbs. (1134 kg)	2150 lbs. (975 kg)	2150 lbs. (975 kg)	10.5 lbs. (4.7 kg)
RPH211	21" (53.3 cm)	2500 lbs. (1134 kg)	2000 lbs. (907 kg)	2000 lbs. (907 kg)	11.0 lbs. (4.9 kg)
RPH241	24" (61.0 cm)	2500 lbs. (1134 kg)	1750 lbs. (794 kg)	1750 lbs. (794 kg)	11.1 lbs. (5.0 kg)
RPH271	27" (68.6 cm)	2500 lbs. (1134 kg)	1500 lbs. (680 kg)	1500 lbs. (680 kg)	12.3 lbs. (5.5 kg)
RPH301	30" (76.2 cm)	2500 lbs. (1134 kg)	1300 lbs. (590 kg)	1300 lbs. (590 kg)	13.9 lbs. (6.3 kg)
RPH361	36" (91.4 cm)	2500 lbs. (1134 kg)	1100 lbs. (499 kg)	1100 lbs. (499 kg)	14.1 lbs. (6.3 kg)

\*Recommended maximum working load is 50% of minimum ultimate ratings listed.

RP—1 series has 1" plastisol coated threads

For 1" Nylon threads, replace the last "1" in number with "2"

For 1" lead threads, replace the last "1" in number with "3"

For 1.375" lead threads, replace the last "1" in number with "4"

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod

