HUBBELL[®] Power Systems, Inc.

1850 Richmond Ave East Aiken, SC 29801 Phone: 803-648-8386 www.Hubbellpowersystems.com

15 kV LOADBREAK FUSED ELBOW

Conforms to all Applicable Requirements of IEEE Std. 386 Latest Revision



Maximum Continuous Voltage.......8.3 kV Phase-to-Ground
14.4 kV Phase-to-Phase
Continuous Current......200 A
Maximum Applicable Fuse......40 A


Insulation Withstand Voltages

Production Tests

100% factory tested for Partial Discharge and either AC 60 Hz (34 kV for 60 Sec.) or Impulse (BIL) (95 kV 1.2 x 50 μ Sec. wave). Test Point Verification Performed.

TABLE 1

| Size | Insulation Range (in.) | Insulation Range (mm.) |
|------|------------------------|------------------------|
| Α | 0.61 - 0.82 | 15.5 - 20.9 |
| В | 0.72 - 0.99 | 18.3 - 25.0 |
| С | 0.92 - 1.19 | 23.4 - 30.1 |

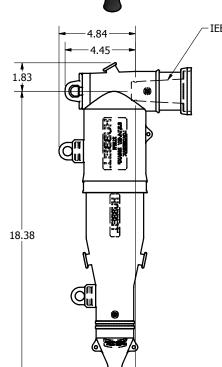

1.32 -

06/<u>05/17</u>

IEEE STD 386 INTERFACE 5

| TABL | Ε. | 2 |
|------|----|---|
|------|----|---|

| CONNECTOR | CONDUCTOR | STRANDING | | |
|-----------|-----------|-----------------------|--|--|
| 2 | #2 | COMPACT & SOLID | | |
| 3 | #2 | STRANDED & COMPRESSED | | |
| 3 | #1 | COMPACT & SOLID | | |
| 4 | #1 | STRANDED & COMPRESSED | | |
| 4 | 1/0 | COMPACT & SOLID | | |
| 5 | 1/0 | STRANDED & COMPRESSED | | |
| 5 | 2/0 | COMPACT & SOLID | | |
| 6 | 2/0 | STRANDED & COMPRESSED | | |
| 6 | 3/0 | COMPACT & SOLID | | |
| 7 | 3/0 | STRANDED & COMPRESSED | | |
| 7 | 4/0 | COMPACT & SOLID | | |
| 8 | 4/0 | STRANDED & COMPRESSED | | |
| 8 | 250 | COMPACT | | |

ORDERING INFORMATION:

215FE**X1X2X3X**4

X₁ = C FOR COOPER™ FUSE H FOR HI-TECH® FUSE

X₂ = SIZE (SEE TABLE 1)

X₃ = CONNECTOR (SEE TABLE 2)

X4 = J FOR SEAL KIT

S FOR SHIELD ADAPTOR BLANK FOR NEITHER

EXAMPLE 215FEHA3J

15KV FUSED ELBOW FOR HI-TECH FUSE,

INSULATION RANGE .61"-.82"

CONNECTOR SIZE 3 WITH A SEAL KIT

The Hubbell 15kV Class Fused Loadbreak Elbow combines a loadbreak elbow with full range current-limiting fuse protection. The Hubbell Fused Elbow provides a quick and cost effective solution for adding fused reliability to underground distribution systems. When mated with a comparable loadbreak bushing, or other devices with an interface that conforms to IEEE Std. 386 Interface 5, the Hubbell Fused Elbow provides a fully shielded and submersible connection.

| | HUBBELL POW | | | | STEMS, I | nc. |
|--|-------------|------------------------|------------|-----------------------|------------|-----|
| | TITLE | | 15 kV FU | ISED ELBO | W | |
| ONTENTS ARE CONFIDENTIAL AND THE XCLUSIVE PROPERTY OF HUBBELL | | | | | | |
| POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE | SIZE | DWG NO. | | CAT / PART / ASSY NO. | | REV |
| WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED. | SB | 1 | | 215FE | | 1 |
| ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS. | | NOT SCALE S DRAWING | DRN BY BVB | DATE 05/18/17 | SHEET 1 OF | - 1 |