

1850 Richmond Ave East
Aiken, SC 29801
Phone: 803-648-8386
www.Hubbellpowersystems.com

15KV 200A LOADBREAK ELBOW



- ORDERING INFORMATION
1. WHEN ORDERING INTEGRAL SEAL USE 215LEJ
 2. SELECT ELBOW SIZE (X) BASED ON INSULATION DIAMATER
 3. SELECT CONNECTOR SIZE (Y) BASED ON CONDUCTOR, OR "0" FOR NO CONNECTOR
 4. ADD "P" TO THE END IF A PROBELOK CONNECTOR IS REQUIRED
 5. ADD "T" TO THE END IF A TEST POINT IS REQUIRED
 6. ADD "J" TO THE END IF A JACKET SEAL KIT IS REQUIRED
 7. ADD "S" TO THE END IF A SHIELD ADAPTER KIT IS REQUIRED


215LE(J)xy(P)(T)(J)(S)

EXAMPLE 1: 215LE45
15KV 200A LOADBREAK ELBOW SIZE 4 WITH A SIZE 5 CONNECTOR

EXAMPLE 2: 215LEJ50T
15KV 200A LOADBREAK ELBOWSIZE 5 WITH INTEGRAL SEAL, NO CONNECTOR AND A TEST POINT

EXAMPLE 3: 215LE34PTS
15KV 200A LOADBREAK ELBOWSIZE 3 WITH SIZE 4 PROBELOK CONNECTOR, A TEST POINT AND A SHIELD ADAPTER

DIAMETER ACROSS INSULATION		
SIZE (X)	INCH	MM
3	.495-.730	12.6-18.5
4	.635-.905	16.1-23.0
5	.760-1.135	19.3-28.8

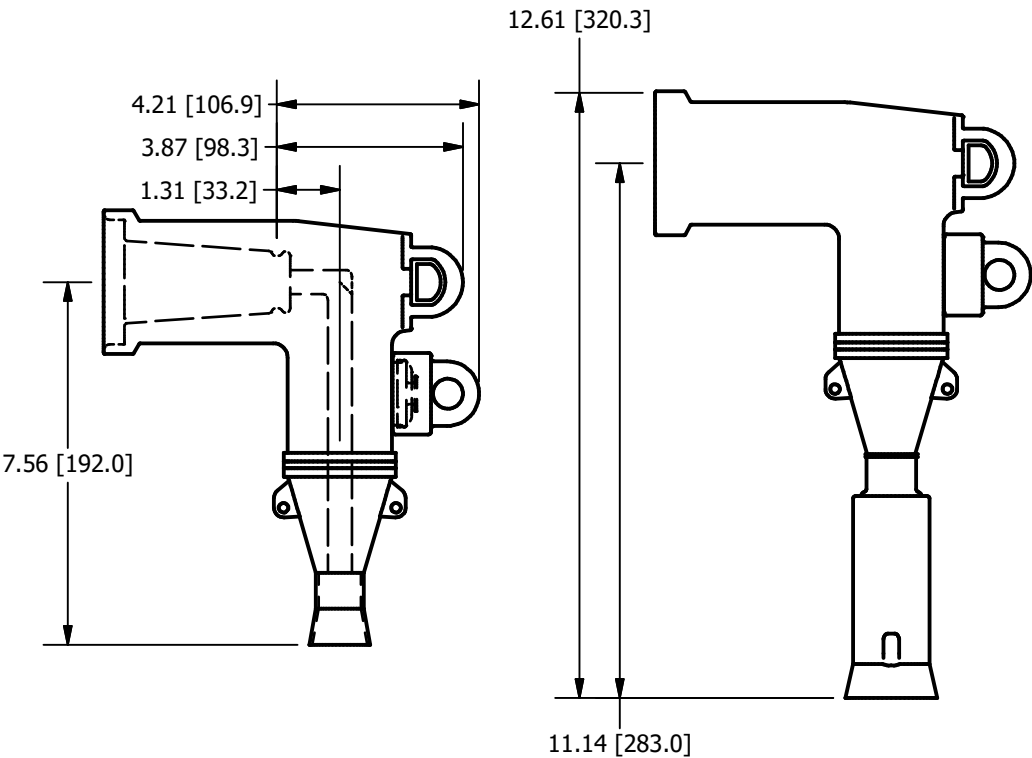

DIMENSION IN PARENTHESIS ARE METRIC

CONN. CODE "Y"	CONDUCTOR SIZE		CONNECTOR DIA	CRIMPING INFO
	STD OR COMPRESSED	SOLID OR COMPACTED		MANUFACTURER, DIE, (CRIMPS)
1	6	4	.625 [15.8]	HUBBELL (ANDERSON), VERSACRIMP (5) BURNDY, BG(6), W-BG (3), W243 (4) U-BG (3), U243 (2) KEARNEY; 5/8 NOSE (6), 5/8-1 (6), 9/16 (4), TU (4)
2	4-3	2-3		
3	2	1		
4	1	1/0		
5	1/0	2/0		
6	2/0	3/0		
7	3/0	4/0	.780 [19.8]	HUBBELL (ANDERSON), VERSACRIMP (5) BURNDY; W247 (4), U247 (2), U27ART (3) KEARNEY; "0" 737 (7), 747 (4), "H" 737(4), 747 (3)
8	4/0	-		

REV DATE03/27/2020

CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL® POWER SYSTEMS, Inc.

POWER SYSTEMS, INC

TITLE15KV 200A
LOADBREAK ELBOW

SIZE SB

DWG NO. --

CAT / PART / ASSY NO. 215LE

REV 0

DO NOT SCALE THIS DRAWING

DRN BY BVB

DATE 03/27/2020

SHEET 1 OF 1