
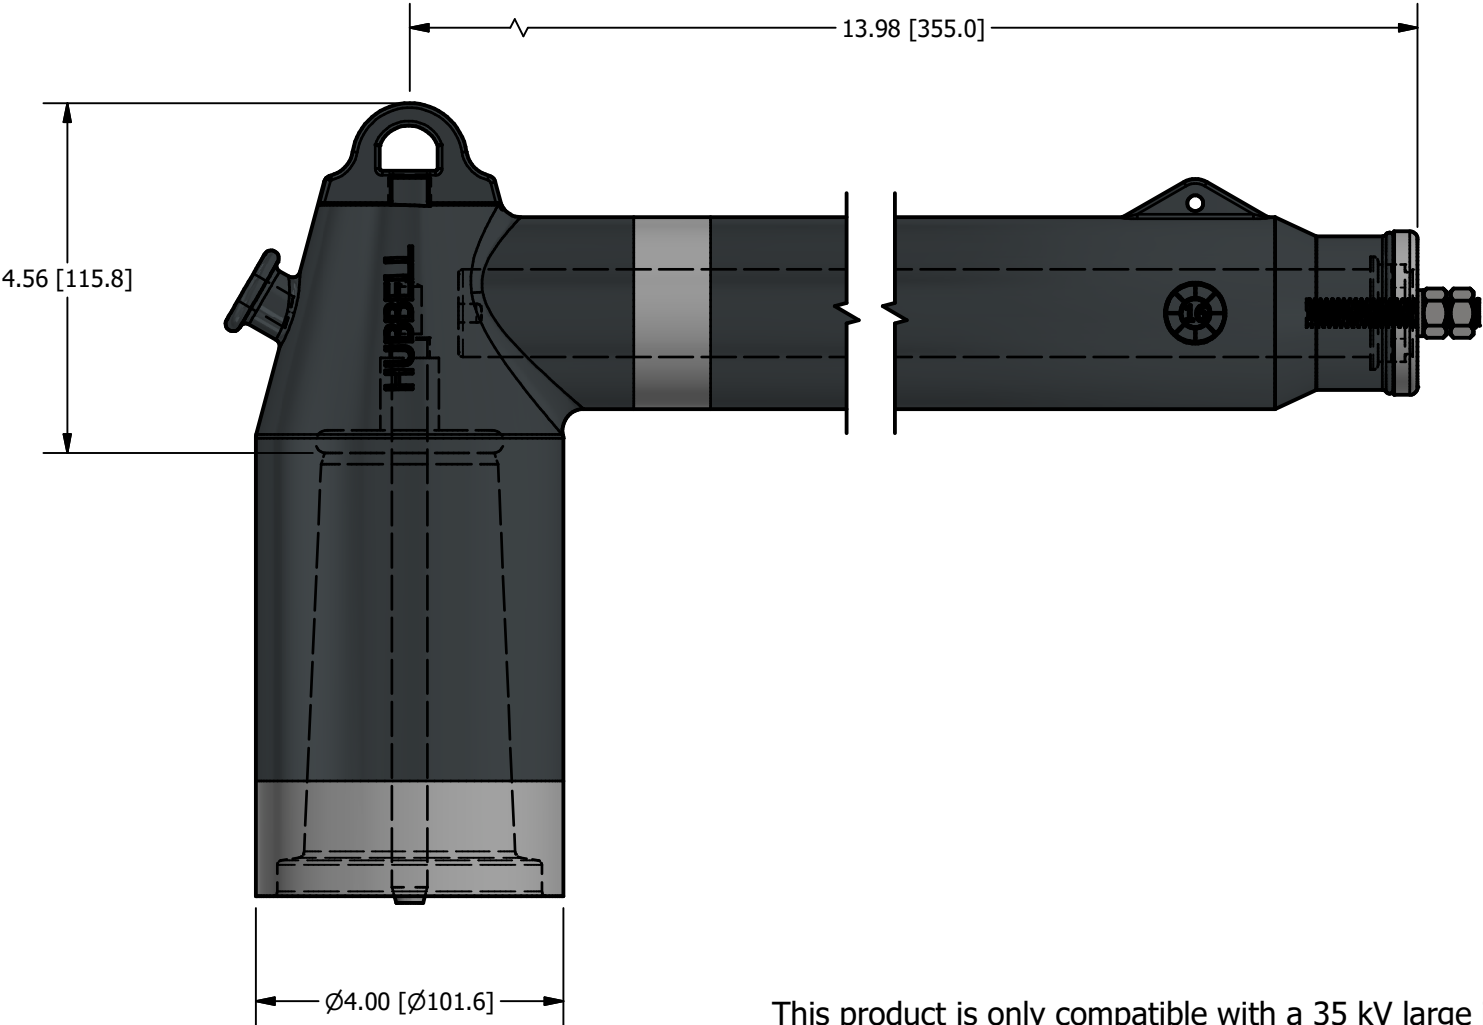


35KV CLASS ELBOW ARRESTER

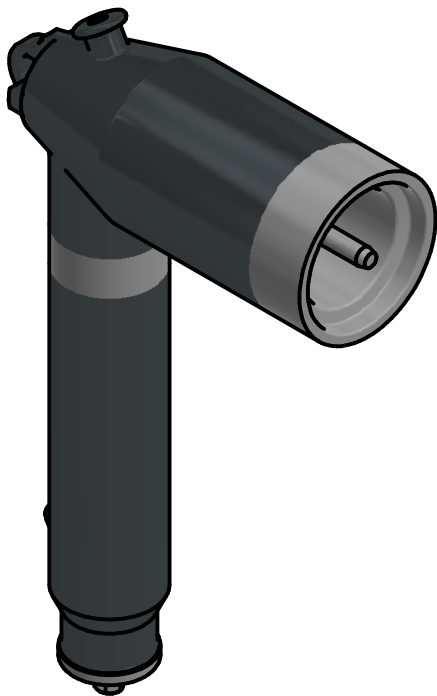

This product is only compatible with a 35 kV large interface, Interface 8 of IEEE Std. 386.

Catalog Number	MCOV kV	Rating kV	0.5 µsec. 5kA Max IR-	Maximum Discharge Voltage (kV Crest) 8x20 µsec. Current Wave					
				1.5 kA	3.0 kA	5.0 kA	10 kA	20kA	40 kA
236ELA27	22.0	27.0	88.0	70.8	75.4	80.4	90.5	104.6	130.7
236ELA30	24.4	30.0	97.8	78.7	83.8	89.3	100.6	116.2	145.2
236ELA33	26.9	33.0	107.6	86.6	92.2	98.3	110.7	127.9	159.8
236ELA36	29.0	36.0	117.4	94.4	100.5	107.2	120.7	139.4	174.3

REV DATE
08/25/2021

CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.



HUBBELL POWER SYSTEMS, Inc.

TITLE
35KV CLASS LARGE INTERFACE
ELBOW ARRESTER

SIZE SB	DWG NO. -	CAT / PART / ASSY NO. 236ELA	REV 1
DO NOT SCALE THIS DRAWING	DRN BY TDO	DATE 08/16/2021	SHEET 1 OF 1