


#4 - 4/0 SERIES TAP CONNECTORS

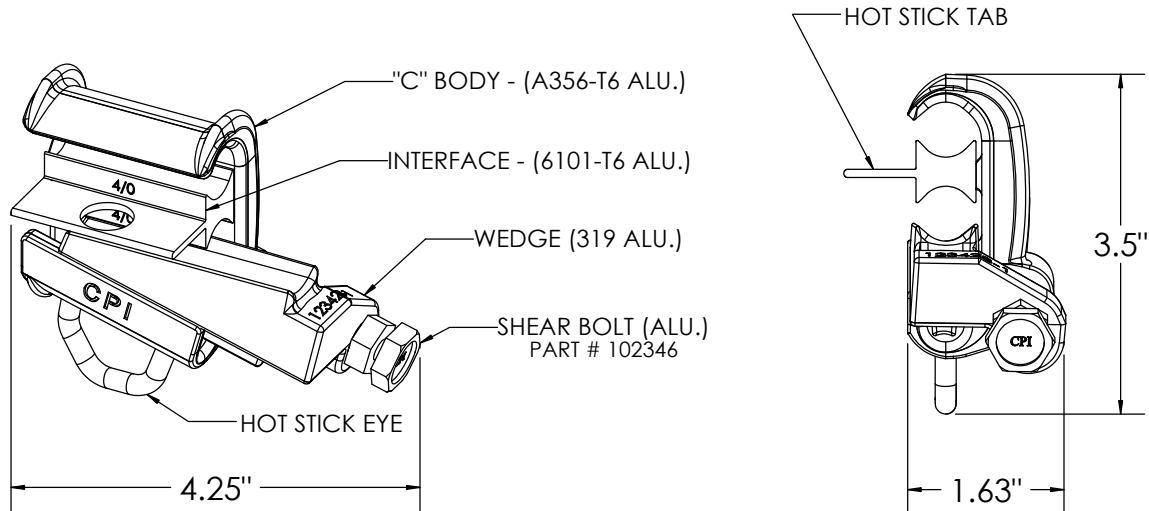

Main Conductor		Tap Conductor		Catalog #
Description	Dia. Range	Description	Dia. Range	
#6	.162" - .232"	#6, #4 SOLID	.162" - .204"	640101
#4 #2 #1 AAC	.232" - .328"	#6, #4 SOLID	.162" - .204"	240100
		#4	.232" - .257"	240101
		#2, #1 AAC	.292" - .328"	240102
#1 ACSR 1/0 2/0 AAC	.354" - .414"	#6 ACSR, #4 AAC	.198" - .232"	210103
		#4 AAC, #2, #1 AAC	.232" - .328"	210105
		#1 ACSR, 1/0, 2/0 AAC	.354" - .414"	210106
2/0 ACSR 3/0	.447" - .502"	#6 ACSR, #4 AAC	.198" - .232"	230107
		#4, #2 AAC	.232" - .292"	230108
		#2 AAC, #1	.292" - .354"	230109
		#1 ACSR, 1/0, 2/0 AAC	.354" - .414"	230110
		2/0 ACSR, 3/0	.447" - .502"	230111
3/0 ACSR 4/0 250 AAC	.502" - .574"	#6 ACSR, #4 AAC	.198" - .232"	264111
		#4 ACSR, #2, #1 AAC	.250" - .328"	264112
		#1 ACSR, 1/0, 2/0 AAC	.354" - .414"	264113
		2/0 ACSR, 3/0,	.447" - .502"	264114
		4/0, 250 AAC	.522" - .574"	264115

STANDARD PACKAGE: Full Carton: 75 Units: 11" x 11" x 11.5" Box: 38 Lbs. Half Carton: 50 Units: 11" x 11" x 7" Box: 25 Lbs.