


SMOOTH OUT/RIBBED IN

3" SDR 13.5

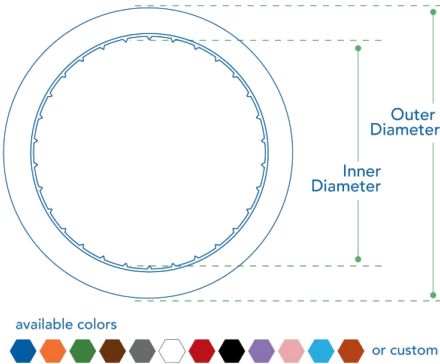

Nominal OD	3.5 in
OD Tolerance +/-	0.018 in
Min. Wall	0.259 in
Wall Tolerance +	0.031 in
Min. ID	2.88 in
Avg ID	2.911 in
Weight	1.171 lb/ft
Bend Radius Sup	39 in
Bend Radius UnSup	78 in
Conduit SWPS	6335 lbs

STANDARD DETAILS

DETAILS	Manufactured from flexible HDPE (High Density Polyethylene)
SPECIFICATIONS	All Smooth Out/Ribbed In conduit dimensions meet or exceed one or more of the following: ASTM F-2160, ASTM D-3350, ASTM D-3485, NEMA TC-7, UL 651A, UL 1990, Bellcore GR-356
INSTALLATION TYPES	Plow, Trench, Directional Bore, Tray Installations, Aerial
COLORS	Blue, Orange, Green, Brown, Grey, White, Red, Black, Yellow, Lilac, Pink, Aqua, Terra Cotta, Lime Green, or custom colors with optional stripes
CONDUIT MARKINGS	Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.

OPTIONS

CO-EXTRUDED LINING	SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions.
PRE-INSTALLED TAPE	Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.
PRE-INSTALLED CABLE	Cable can be factory pre-installed in conduit
UV PROTECTANT	Available for UV exposure applications (Aerial, Lashed, or External Tray)

† Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

SMOOTH OUT/RIBBED IN RECOMMENDED ACCESSORIES

3" SDR 13.5

3.00" SHUR-LOCK II Quantity: 6 Packaging: Case Part Number: 20000173		3.00" REDI-LOCK Quantity: 6 Packaging: Case Part Number: 20005479		ROTARY CONDUIT CUTTER 1.875" TO 4.500" Quantity: 1 Packaging: Each Part Number: 20001857	
3.00" SDR FLAT VINYL END CAP 3.500" OD Quantity: 1 Packaging: Each Part Number: 20001817		3.00" EXPANSION PLUG 2.920" - 3.450" ID Quantity: 30 Packaging: Case Part Number: 20001764		HYDRALUBE F200I SUMMER (4) 1 GALLON Quantity: 30 / Per Pallet Packaging: (4) 1 Gallon Part Number: 20000218	
HYDRALUBE F300I SUMMER 5 GALLON PAIL Quantity: 24 / Per Pallet Packaging: 5 Gallon Drum Part Number: 20000005		LUBADUK SUMMER (6) 1 GALLON Quantity: 18 / Per Pallet Packaging: (6) 1 Gallon Part Number: 20000351		BULL-LINE POLYESTER TAPE WP12 3000FT Quantity: 48 Packaging: 45" x 45" Part Number: 20000052	
BULL-LINE POLYESTER TAPE WP18 3000FT Quantity: 36 Packaging: 45" x 45" Part Number: 20000068		BULL-LINE POLYESTER TAPE WP25 3000FT Quantity: 36 Packaging: 45" x 45" Part Number: 20000077		BULL-LINE LOCATABLE TAPE WP12LC 3000FT Quantity: 36 Packaging: 45" x 45" Part Number: 20000059	
BULL-LINE LOCATABLE TAPE WP18LC 3000FT Quantity: 36 Packaging: 45" x 45" Part Number: 20000163		BULL-LINE LOCATABLE TAPE WP25LC 3000FT Quantity: 18 Packaging: 45" x 45" Part Number: 20000155		BULL-LINE ARAMID TAPE WK25 1000FT Quantity: 100 Packaging: 45" x 45" Part Number: 20000038	

† Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.