



CLAMP DETAIL

A = 2-23/64
 B = 8-11/32
 C = 2-11/32
 D = 59/64*
 E = 3-7/64
 F = 1-5/32
 G = 2-1/8
 H = 5-1/4
 I = 5/8 DIA. PIN
 J = 2-11/32
 K = 3-41/64
 L = 1-25/32
 M = 31/64
 N = 1/2-13 UNC
 GROUND ATTACHMENT
 P = 3-15/16

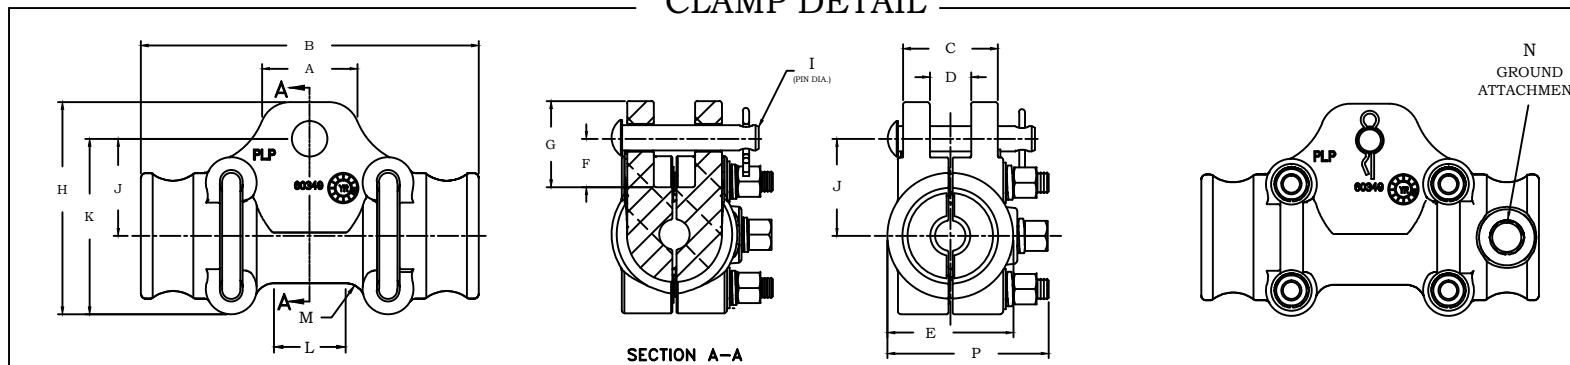


ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY PER FACTORY TOLERANCES, CONTACT PLP FOR MORE INFORMATION.

* - Opening "D" accepts maximum 3/4 "

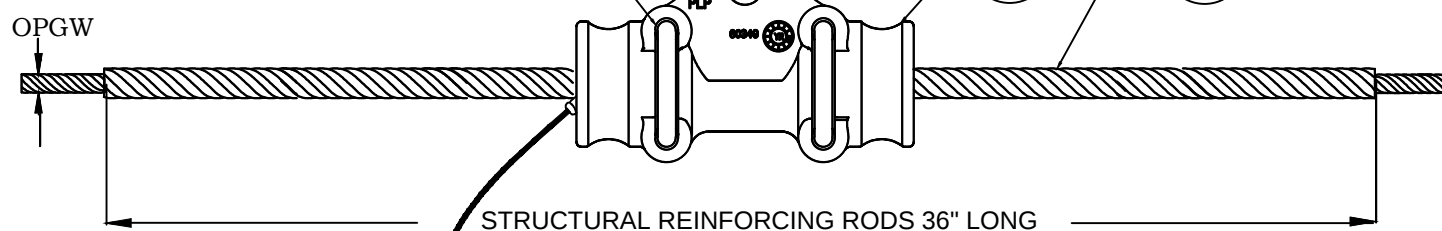

CATALOG NO.
4700111GYC

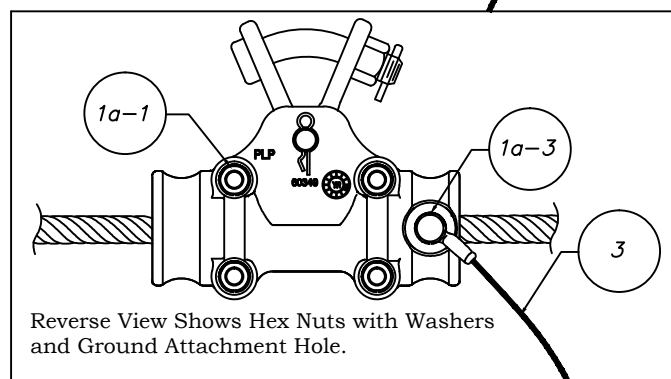

3	1 SET	710010016	4' LONG #4 (7W) COPPER GROUND WIRE ASSY with one terminal.	Copper
2	1 EA.	YC-5207, OR SUFFIX "YC"	Y-CLEVIS-EYE 20KLB	GALV. STEEL
1b	1 SET		STRUCTURAL REINFORCING RODS	ALUMINUM ALLOY
1a-3	1 EA.		1/2"-13 X 3/4" LG BOLT & LOCK WASHER	GALV. STEEL
1a-2	2		U-BOLT CAPTURED W/GROMMETS	GALV. STEEL U-BOLT ELASTOMER GROMMET
1a-1	4 EA.		FLAT WASHER, LOCKWASHER, NUT	GALV. STEEL
1a	1 Pair		KEEPER HALF W/CUSHION INSERTS	AL ALLOY KEEPER ELASTOMER INSERTS
1	1	4700111	FIBERLIGN® CUSHION CLAMP	
Item	Req'd	Ref. No.	Description	Material



**PREFORMED
LINE PRODUCTS**

660 BETA DRIVE MAYFIELD, OHIO 44143
 PH: (440)-461-5200 FAX: (440)-442-8816
<http://www.preformed.com>

CONFIDENTIAL

The data and information contained in this document are proprietary to PREFORMED Line Products (PLP). Such data and information are provided solely for use with PLP's products and shall not be disclosed, duplicated, or otherwise used without the express written approval of PLP.
 PLP MAINTAINS THE RIGHT TO CHANGE DRAWING SPECIFICATIONS AT ANY TIME.
 PLEASE CONTACT PLP TO VERIFY CURRENT VERSION.

TITLE
 FIBERLIGN® Cushion Clamp w/ Y-Clevis Eye
 for OPGW - Diameter Range .665"-.694"

DWG BY:	CHK BY:	DATE:	SCALE	FILE NAME
PSV	JLJ	7/20/15	NTS	4700111GYC