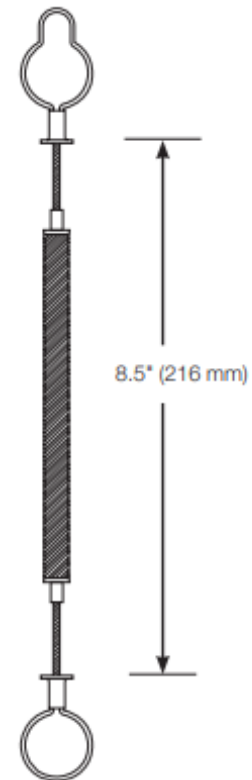


**Table 3. Trip-O-Link™ Fuse Link Ordering Information**

Current Rating	Type X	Type KS	Type 200	Type QA	Type K	Type T
.33	42033	—	—	—	—	—
.50	42050	—	—	—	—	—
.75	42075	—	—	—	—	—
1.00	42100	22001	12001	6813	32001	52001
1.25	42125	—	—	—	—	—
1.50	42150	—	—	—	—	—
2	42200	22002	12002	6814	32002	52002
2.50	42250	—	—	—	—	—
2.75	42275	—	—	—	—	—
3	—	22003	12003	6815	32003	52003
3.50	42350	—	—	—	—	—
4	42400	—	—	—	—	—
5	—	22005	12005	6816	—	—
5.50	42550	—	—	—	—	—
6	—	—	—	—	32006	52006
7	42007	22007	12007	6817	—	—
8	—	—	—	—	32008	52008
10	42010	22010	12010	6818	32010	52010
12	—	—	—	—	32012	52012
15	42015	22015	12015	6819	32015	52015
20	—	22020	12020	6820	32020	52020
25	—	22025	12025	6821	32025	52025
30	—	22030	12030	7482	32030	52030
40	—	22040	12040	7483	32040	52040
50	—	22050	12050	7484	32050	52050



**Figure 3. Trip-O-Link fuse links.**