


Galvan P/N	Specification	Nominal Dia	Finished "D"	"L" Feet	"R" Stamping	"A" max (in.)	"B" max (in.)	Coating min (in.)	Use With Coupling	Rod Color Code
5005		1/2	0.471-0.481	5	GALVAN 5005	3/16	3/32	0.002	50-TC	Green
5006		1/2	0.471-0.481	6	GALVAN 5006	3/16	3/32	0.002	50-TC	Green
5008		1/2	0.471-0.481	8	GALVAN 5008	3/16	3/32	0.002	50-TC	Green
5008L	UL-467/NEMA GR-1	1/2	0.500-0.510	8	GAL5008L UL LISTED 44DF	3/16	3/32	0.010	50-TC	Orange
5009L	UL-467/NEMA GR-1	1/2	0.500-0.510	9	GAL 5009L UL LISTED 44DF	3/16	3/32	0.010	50-TC	N/A
5010		1/2	0.471-0.481	10	GALVAN 5010	3/16	3/32	0.002	50-TC	Green
5010L	UL-467/NEMA GR-1	1/2	0.500-0.510	10	GAL5010L UL LISTED 44DF	3/16	3/32	0.010	50-TC	Orange
6255		5/8	0.539-0.549	5	GALVAN 6255	3/16	1/8	0.002		N/A
6255-10M		5/8	0.555-0.565	5	GALVAN 6255-10M	3/16	1/8	0.010	60-TC	N/A
6256		5/8	0.539-0.549	6	GALVAN 6256	3/16	1/8	0.002		N/A
6256-10M		5/8	0.555-0.565	6	GALVAN 6256-10M	3/16	1/8	0.010	60-TC	N/A
6258	UL-467/NEMA GR-1	5/8	0.555-0.565	8	GAL6258 UL LISTED 44DF	3/16	1/8	0.010	60-TC	Copper
6258G13	UL-467/RUS	5/8	0.555-0.565	8	GAL6258G13 UL LISTED 44DF	3/16	1/8	0.013	60-TC	Yellow
6260	UL-467/NEMA GR-1	5/8	0.555-0.565	10	GAL6260 UL LISTED 44DF	3/16	1/8	0.010	60-TC	Copper
6260-CFE		5/8	0.625-0.635	10	GALVAN 6260-CFE	3/16	1/8	0.013	60-TC	Copper
6260G13	UL-467/RUS	5/8	0.555-0.565	10	GAL6260G13 UL LISTED 44DF	3/16	1/8	0.013	60-TC	Yellow
6262	UL-467/NEMA GR-1	5/8	0.555-0.565	12	GAL6262 UL LISTED 44DF	3/16	1/8	0.010	60-TC	N/A
6265	UL-467/NEMA GR-1	5/8	0.555-0.565	15	GAL6265 UL LISTED 44DF	3/16	1/8	0.010	60-TC	N/A
7508	UL-467/NEMA GR-1	3/4	0.673-0.683	8	GAL7508 UL LISTED 44DF	1/4	1/8	0.010	70-TC	Black
7508G13	UL-467/NEMA GR-1	3/4	0.673-0.683	8	GAL7508G13 UL LISTED 44DF	1/4	1/8	0.013	70-TC	
7510	UL-467/NEMA GR-1	3/4	0.673-0.683	10	GAL7510 UL LISTED 44DF	1/4	1/8	0.010	70-TC	Black
7512	UL-467/NEMA GR-1	3/4	0.673-0.683	12	GAL7512 UL LISTED 44DF	1/4	1/8	0.010	70-TC	N/A
7515	UL-467/NEMA GR-1	3/4	0.673-0.683	15	GAL7515 UL LISTED 44DF	1/4	1/8	0.010	70-TC	N/A
1010	UL-467/NEMA GR-1	1	0.907-0.917	10	GAL1010 UL LISTED 44DF	3/8	7/32	0.010	80-TC	N/A

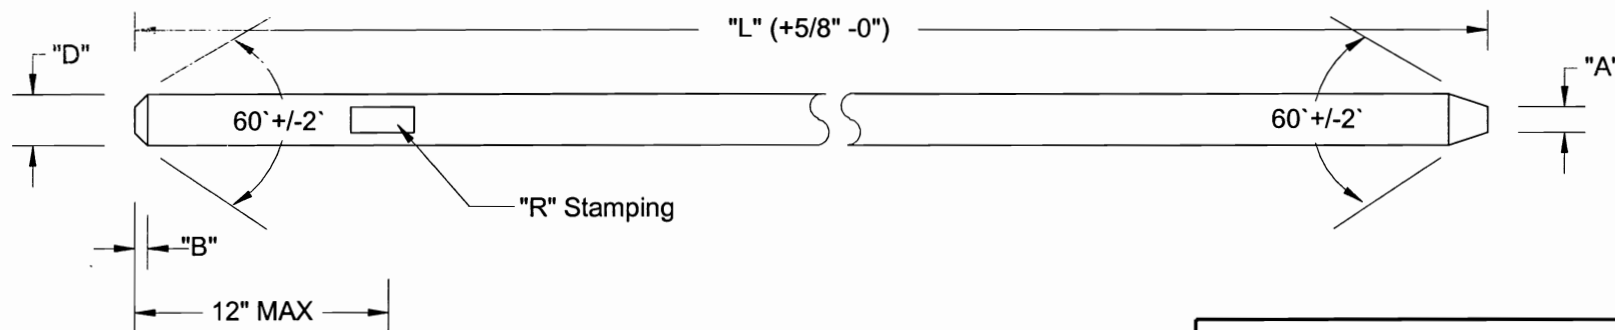

MATERIAL:

COATING OF PURE COPPER ELECTROLYTICALLY BONDED TO SUBSTRATE OF COLD-DRAWN STEEL ASTM A529 / A529M-05 GRADE 55 (0.18C, MIN)

NOTE:

GROUND RODS MEETING RUS REQUIREMENTS MAINTAIN A 13-MIL MINIMUM COATING

GALVAN ELECTRICAL PRODUCTS		
 GALVAN INDUSTRIES, INC. P.O. BOX 369 HARRISBURG, NC 28075 704-455-5102 WEBSITE: WWW.GALVANELECTRICAL.COM		
SCALE: NONE	APPROVED BY:	DRAWN BY: RMM
DATE: 05/19/05		
COPPER BONDED GROUND ROD		REVISED :
		DRAWING NUMBER: GR-1