

CL GUARD	
PART NUMBER	DESCRIPTION
70381408	LIGHT GRAY
70381419	DARK GRAY -FLAME RETARDANT

**FEATURES**

- \* SECURE LATCHES WHICH CAN BE EASILY UNLATCHED WHEN NEEDED.
- \* THICK WALL CONSTRUCTION FOR RIGIDITY.
- \* PREMIUM GRADE WEATHER RESISTANT POLYPROPYLENE COPOLYMER MATERIAL. FLAME RETARDANT MATERIAL IS UL 94 V-0 RATED.
- \* LARGE CABLE PORTS FOR INSULATED CABLE.
- \* LARGE TOP PORT TO ACCOMDATE CL UP TO 2.2"
  
- \* FLEXIBLE FINGERS AT THE CABLE ENTRANCES AND MOUNTING THROAT PERMIT EASY INSTALLATION.


**INSTALLATION INSTRUCTIONS**

- \* CM SHEDMOUNT STYLE GUARDS ARE DESIGNED FOR INSTALLATION ON DISTRIBUTION CLASS HV BUSHINGS AND ARRESTERS, UP TO 35 KV CLASS (20 KV LINE TO GROUND). THE GUARD IS TO BE INSTALLED ONLY OVER THE TOP SHED OF THE INSULATOR.
- \* IN THE OPEN POSITION, THE GUARD IS INSTALLED AROUND THE INSULATOR AND IS SQUEEZED SHUT UNTIL THE LATCHES ENGAGE. NORMAL INSTALLATION IS ON DEENERGIZED EQUIPMENT, BUT GUARDS CAN BE INSTALLED ON ENERGIZED EQUIPMENT USING PROPER LIVE LINE HANDLING EQUIPMENT AND PROCEDURES.
- \* INSTALLATION NOTE ALSO INCLUDED ON INSIDE LEFT SECTION OF SHEDMOUNT GUARD

**MATERIAL PROPERTIES**

- \* UV STABILIZED
- \* DIELECTRIC STRENGTH-22-23KV/MM
- \* MINIMUM INSTALLATION TEMPERATURE (-30°C)

NOTE: DIMENSIONS ARE IN INCHES AND ARE FOR REFERENCE ONLY.

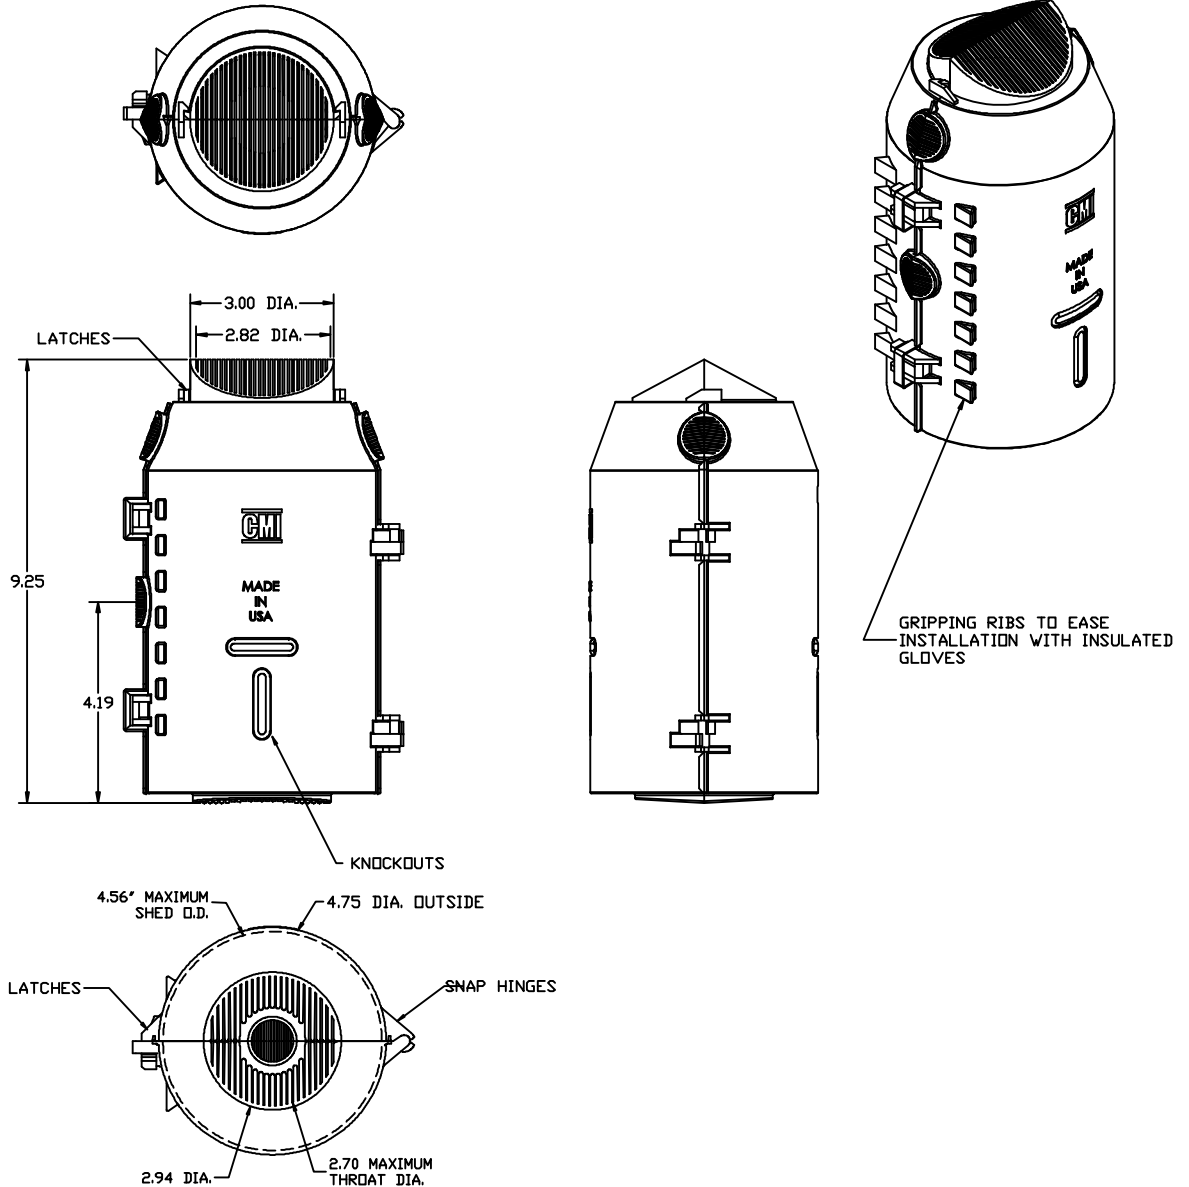

STANDARD BOX COUNT 100

DESCRIPTION	CL WILDLIFE GUARD	DRAWN BY:	R.O.	Central Moloney, Inc. Components Operation <small>8500 Jefferson Parkway—Phone (870) 247-5320—Pine Bluff, Arkansas 71602</small>					
			DATE:		8/12/21	NO.:	CDS 38 002	REV.:	