



## MacLean Exclusive Pop Up Tab




Tabs in sight —  
Insertion done right!

## Features

- New synthetic inhibitor with wide temperature range for improved corrosion protection in severe environments
- Pop up tab to verify proper insertion
- Ventilation holes to allow moisture to escape and for air cooling
- Stainless steel spring & aluminum pilot cup to improve corrosion performance
- Field proven: over 750,000 units already sold worldwide
- Suitable for any environment: coastal, industrial, urban or rural
- Simple, but robust, design for a fast and reliable connection
- Rated to hold a minimum of 95% of RBS of the conductor used
- ANSI C119.4 Full Tension Class A connector

## Dimensions

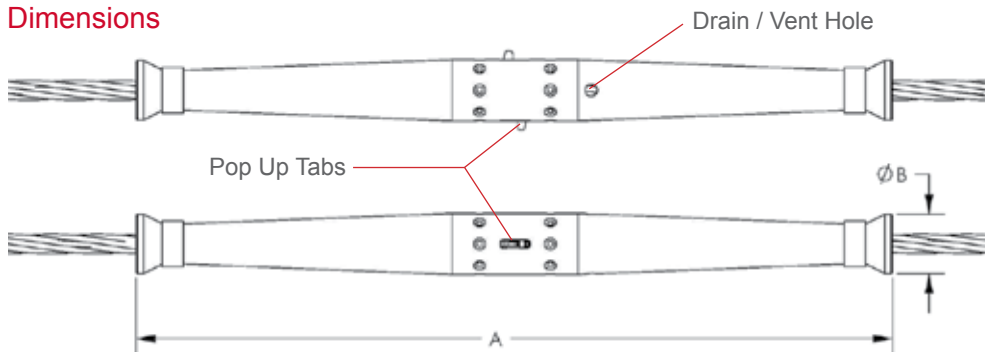

## CRS in Action Video



Catalog Number	ACSR ASTM-B232	AAAC ASTM-B399	AAC ASTM-B231	A	B	Strand Guide Color	Conductor Diameter Range in Inches
7651-CRS	#4	#4	#4	10.0	0.92	Orange	0.229 - 0.265
7652AP-CRS	#2 & #4	#2 & #4	#2 & #4	12.5	1.01	Red/ Orange	0.229 - 0.340
7653-CRS	1/0	1/0	1/0 & 2/0	15.3	1.20	Yellow	0.365 - 0.425
7654AP-CRS	1/0 & 2/0	1/0 & 2/0	1/0, 2/0 & 3/0	16.0	1.27	Gray/Yellow	0.365 - 0.475
7656AP-CRS	3/0 & 4/0	3/0 & 4/0	4/0 & 266.8	17.25	1.56	Pink/Black	0.502 - 0.592
7658AP-CRS	266.8 - 18/1 336.4 - 18/1	266.8 & 336.4	266.8, 336.4 & 397.5	21.5	1.85	Green/Brown	0.580 - 0.724
7659-CRS	397.5 - 18/1 477 - 18/1	397.5 & 477	397.5, 477 & 556.5	23.5	2.06	Aqua	0.740 - 0.856
7660-CRS	556.5 - 18/1 to 795.0 - 36/1	556.5 - 636.0	600.0 - 795.0 (37STR) 795.0 (61STR)	23.5	2.34	Natural	0.879 - 1.040