




# COYOTE® Defender 2

## Ballistic Protection for the COYOTE® Dome Closure CRB System for OPGW

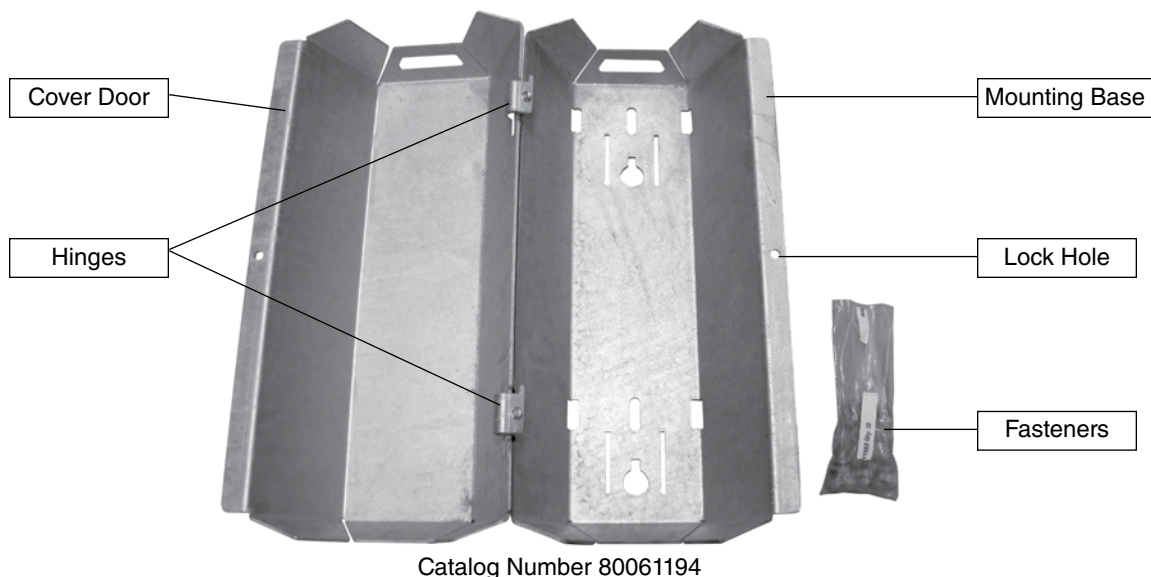

### GENERAL INFORMATION

The new COYOTE® Defender 2 is tailored to accommodate the COYOTE® Dome Closure CRB System for OPGW. In comparison to the original Defender, the Defender 2 reduces overall weight by 1/3 without sacrificing the level of ballistic protection, as the 7 gauge steel thickness remains the same.

The Defender 2 consists of a mounting base that mounts directly to the structure, and a hinged door that swings open for easy access to the Splice Closure. Each component (door and base) weighs under 37# allowing for easy and safe handling.

**MOUNTING OPTIONS:** The Defender 2 can be mounted direct to the structure via 5/8" through bolts, DA bolts, or 1-1/4" wide band material. The Defender 2 can also be mounted to the FIBERLIGN® Cable Storage 2 at cable storage locations.

### ORDERING INSTRUCTIONS

Order Catalog Number 80061194 to receive the COYOTE® Defender 2 kit shown above. As shown below, this kit can be mounted to the FIBERLIGN® Cable Storage 2 kit #80061195 (ordered separately). For more details about FIBERLIGN® Cable Storage 2, see earlier section.



Catalog Number	Cable Storage and Ballistic Protection**
80061195	FIBERLIGN® CABLE Storage 2 for OPGW, 60" Loop
80061194	COYOTE® DEFENDER 2 for 6.5" x 17" and 6.5" x 22" Domes

\*\*COYOTE Dome Kits include a Mounting Adapter that can vertically mount the dome directly to wood poles or band to metal poles. The modular design of the mounting adapter can be mounted to the FIBERLIGN® CABLE Storage 2 and COYOTE Defender 2 as well.