


REVISIONS			
LTR	DESCRIPTION	BY/DATE	APPD.BY/DATE
C	UPDATE NOTES	ME 04/06/15	A.W. 04/06/15

UV RESISTANT PVC JACKET (0.045")
 COLOR: BLACK
 SILK SCREEN OUTER CABLE WITH "LINDSEY 9616"

COMPONENT I:
 MODIFIED THERMAL PLASTIC POLYMER, (0.036" THICK)
 22AWG 7/30 TWISTED PAIR
 16AWG 19/29 DRAIN WIRE, AL/MYLAR SHIELD 25% DEVELOP
 COLOR CODE: RED AND WHITE

 CAPACITANCE BETWEEN ONE CONDUCTOR AND OTHER
 CONDUCTOR CONNECTED TO SHIELD: 13 pF/ft.

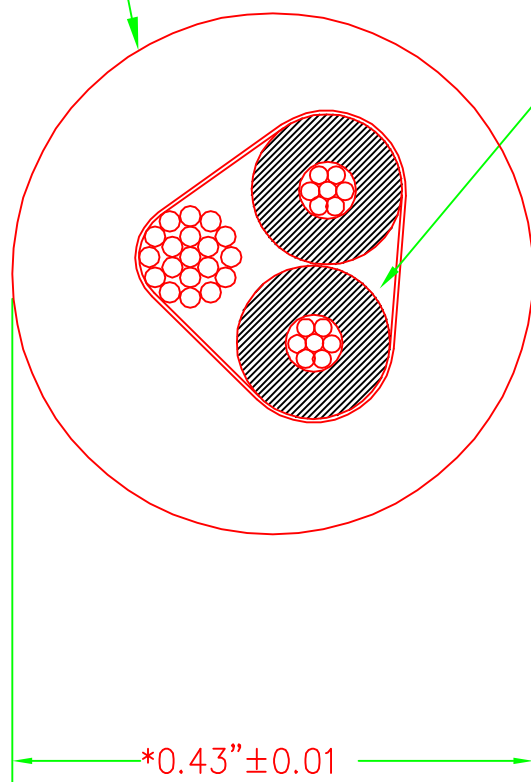

VOLTAGE TEMP: 600V/90C

DIMS IN INCHES BREAK EDGES 0.015
 TOLERANCES – UNLESS OTHERWISE SPECIFIED
 X/X ±1/32
 X.X ±0.06
 X.XX ±0.02
 X.XXX ±0.005

ANGLES ±1°

MATERIAL

FINISH

SEE NOTE 1

SEE NOTE 2

F A B

INNOVATIONS
 IN
 TRANSMISSION AND
 DISTRIBUTION



LINDSEY
 MANUFACTURING COMPANY
 760 N. GEORGIA / AZUSA, CA 91702 (626) 969-3471

APPROVALS

DATE

DRAWN PAUL LARA 12/27/12

CHECKED ANDY WANG 12/27/12

ENGINEER ANDY WANG 12/27/12

CVMI CABLE VOLTAGE

SIZE

SCALE

DWG

REV

A

1:1

9616

C