


Marmon Utility - Kerite Part No: 141F15-C3200

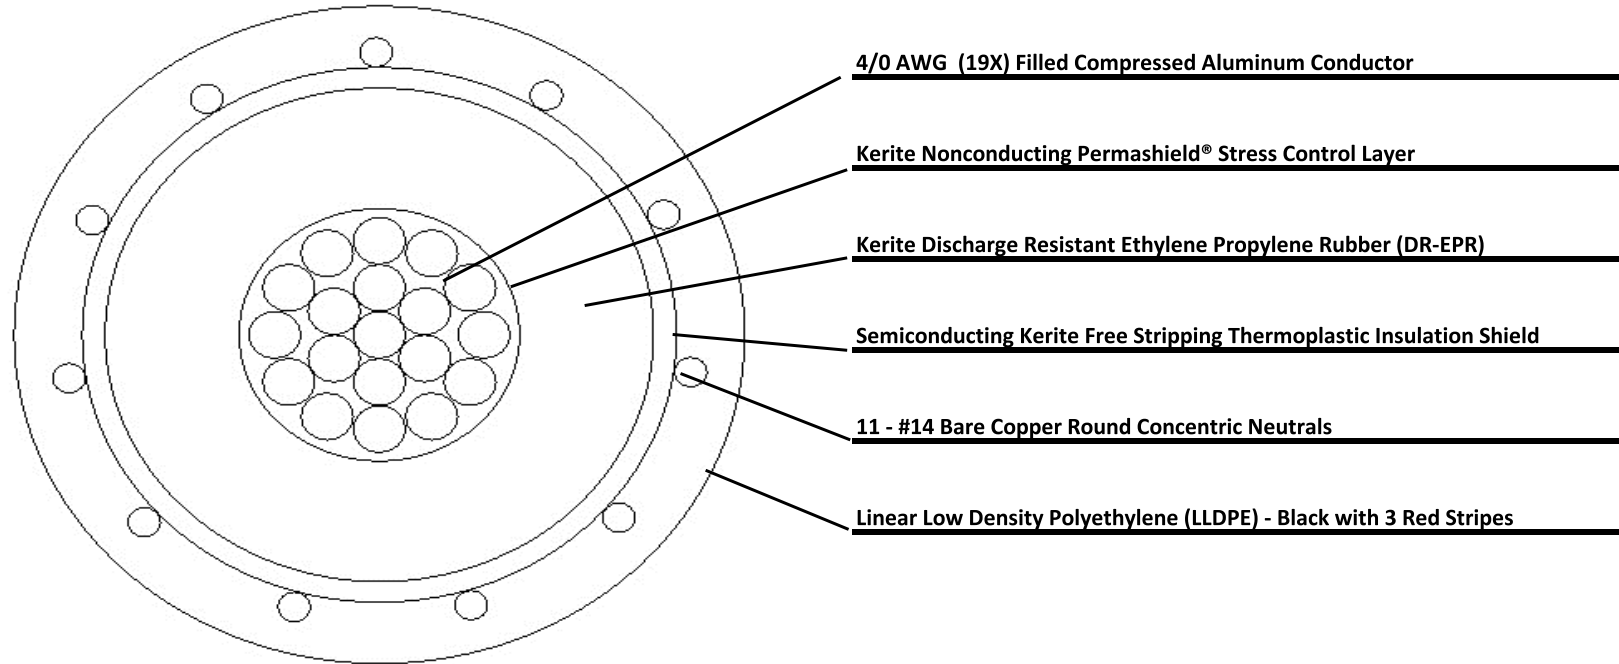

COMPONENT	DESCRIPTION	Min Dia (in)	Nom Dia (in)	Max Dia (in)	Additional Notes			
Conductor	4/0 AWG (19X) Filled Compressed Aluminum	-	0.512	-	Cable Weight (1/C):	0.822	(lbs/ft)	
Conductor Shield	12 mil min pt Kerite Nonconducting Permashield®	-	0.550	-		Cu Weight:	0.144	(lbs/ft)
Insulation	210 mil min pt Kerite DR-EPR	0.955	0.990	1.045		Al Weight:	0.198	(lbs/ft)
Insulation Shield	30 mil min pt Semiconducting Thermoplastic	1.015	1.060	1.145	Industry Standards:			
Metallic Shield	11 - #14 Bare Copper Round Concentric Neutrals	-	1.190	-				
Jacket	45 mil min pt LLDPE Jacket - Black with 3 Red Stripes	-	1.300	-		ICEA: S-94-649		
 CABLE DESCRIPTION:		1/C Single - 4/0 AWG (19X) Filled Compressed Aluminum Conductor, Kerite Nonconducting Permashield®, 15 kV 133% (220mil) Kerite DR-EPR Insulation, 11 - #14 Bare Copper Round Concentric Neutrals, 50 mil Encapsulating LLDPE Jacket - Black with 3 Red Stripes			DRAWING:			
					141F15-C3200			
					SCALE:	None		
					BY:	M. Kubikowski		
					DATE:	October 13, 2023		
IMPORTANT NOTICE:		This drawing is only an illustration of the product and is for information purposes only. Marmon Utility LLC does not accept any liability for errors or omissions or misuse of the information provided.						