


Terminal, Aluminum Compression

By Anderson
Catalog # [ACF40B](#)

Aluminum Compression Terminal, Cable to NEMA B 2-Hole Flat, Cable Diameter Range 0.522-0.575 inches, For use with AAC and ACSR conductor

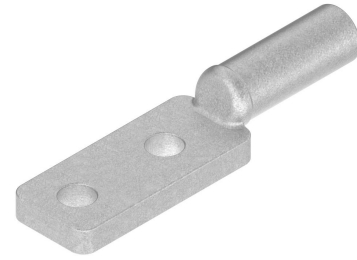

Features

- NEMA B 2-Hole flat compression terminal
- For use with AAC and ACSR conductor with Cable Diameter Ranges of 0.522-0.575 inches
- Material: Cast Aluminum
- Contact sealant is recommended on the pads.
- For use with conventional tooling.

Specifications

EU RoHS Indicator No

Conductor

Conductor Diameter - Minimum	0.522 in
Conductor Diameter - Maximum	0.575 in
Conductor Type	<ul style="list-style-type: none">• AAC• ACSR
Conductor Compatibility	<ul style="list-style-type: none">• ACSR-Penguin-4/0-6/1• AAC-Oxlip-4/0-7• AAC-Valerian-250-19

Configuration

Number of Ground Braid Lug Holes	0
Number of Bolt Holes	2
Number of Pad Holes	2

Current

Maximum Current Rating Amps 0
Continuous

Dimensions

Length - Coupling	0 in
Angle - Pad	180 °
Length Before Compression	0 in
Weight	0.294 lb.
Width - Pad	1.5 in
Diameter - Inside	0 in
Diameter - Base Holes	0 in
Diameter - Bolt	0 in
Base Hole Spacing	0 in

General

Material type	Non-Standard
UPC	096359279525
Type	Terminal, Cable to Flat
Material	Aluminum

Logistics

Pallet Quantity 1728

Product Assets

[Catalog \[English\]](#)