


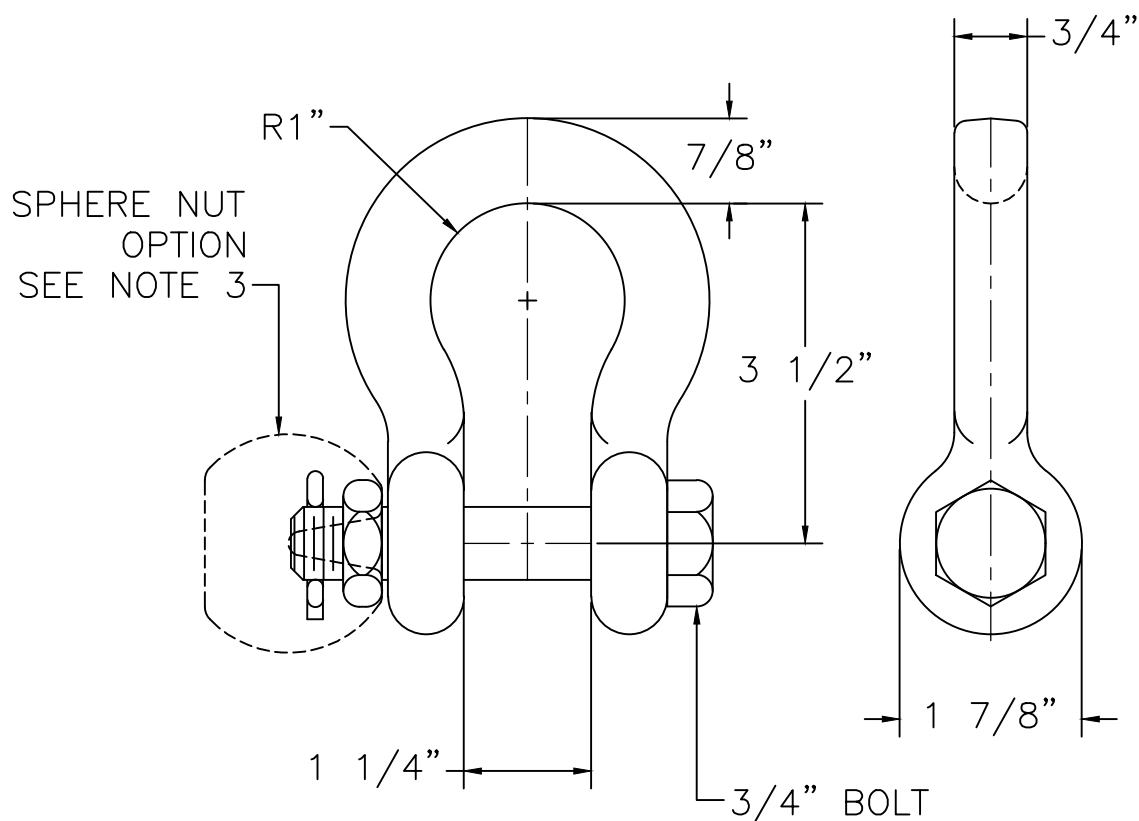

ASSEMBLY NUMBER	RATED STRENGTH	CHARPY LEVEL	STANDARD PACK	WEIGHT
ASH-66-BC	60,000 LBS	—	20	2.56
ASH-66-BC-CH1	60,000 LBS	1	20	2.56
ASH-66-BC-CH2	60,000 LBS	2	20	2.56

NOTES:

- MATERIAL — BODY: FORGED STEEL
HARDWARE: HOT DIP GALVANIZED PER ASTM A-153
COTTER PIN: AISI 302 STAINLESS STEEL
- MARKING: MPS M-335-29-6, ASH-66
- SPHERE NUT: TO INCLUDE SPHERE NUT ADD SUFFIX "S" (ASH-66-BC-S)

CH1: CHARPY LEVEL 1 MEETS MIN ENERGY ABSORPTION OF 20J AT -20°C
(15 FT-LBS AT -4°F)

CH2: CHARPY LEVEL 2 MEETS MIN ENERGY ABSORPTION OF 30J AT -30°C
(22 FT-LBS AT -22°F)

1	3/9/18	CHANGED TO NEW FORMAT, WAS BC8545-1	BKS	
NO.	DATE	DESCRIPTION	BY	CKD

REVISIONS



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

ANCHOR SHACKLE
CATALOG NO. ASH-66-BC SERIES

DATE: 3/9/18	SCALE: NONE	NO. AC-8545-1	R/1	SH.1 OF 1
BY: BKS	BY: BKS	BY: BKS		