





ALUMINUM
ASTC

COUPLERS BOLTED ALUMINUM STRAIGHT TUBE TO CABLE

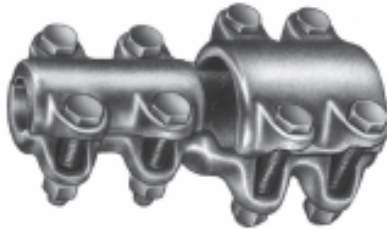

Aluminum alloy, cable to tubing, straight coupler for connecting aluminum—aluminum or aluminum-copper conductor combinations. Clamping bolts have hex-stops for one-wrench installation. Contact sealant is recommended.

Material: Castings—356-T6 aluminum alloy
Hardware—aluminum alloy

Product Data & Conductor Size

CATALOG NUMBER	CONDUCTOR RANGE				DIMENSIONS INCHES (MM)						APPROX. WT. EACH LBS. (KG)
	TUBING MAIN IPS/EHIPS	CABLE TAP			L	A	B	W	C	J	
		AAC	ACSR	DIA.							
*ASTC066	3/4	#4-250 MCM	#4-4/0 Str.	.232-.575 (5.89-14.60)	5-3/4 (146.05)	2-1/2 (63.5)	3 (76.2)	3 (76.2)	2-1/2 (63.5)	1/2 (12.7)	1.0 (.45)
ASTC067	3/4	250-400 MCM	4/0-336.4 MCM	.563-.744 (14.30-18.90)	6 (152.4)	2-1/2 (63.5)	3 (76.2)	3 (76.2)	2-1/2 (63.5)	1/2 (12.7)	1.1 (.50)
		336.4-477		.691-.997	6-3/4	2-1/2	3-1/4	3	2-3/4	1/2	1.2