
Type: ATF

© Download Install Guide

Straight Bolted Pipe Main to Flat Pad

Aluminum alloy tee for aluminum pipe to flat bar pads. NEMA hole drilling is standard. Clamping bolts have hex-stops for one-wrench installation. Contact sealant is recommended.

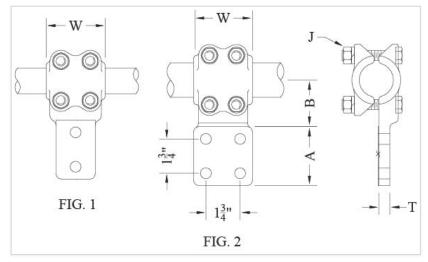

Print This Page Download As PDF Pad Width **Catalog Number** Fig. No. Pipe Size (NPS) A (in) B (in) W (in) T (in) J (in) Weight (lb) ATF-60-4A 2 2 1/2 3 3 3 1/8 3 1/2 5/8 1/2 3.1