

### STANDARD LENGTH SINGLE BAND

Pre-Cut Extrusions Bands	CATALOG #	WEIGHT/EA.	STD. CARTON	HARDWARE	LENGTH	BAND
	BAB-3836	.75 lb.	24	3/8"	36"	3/4"
	BAB-3840	.80 lb.	24	3/8"	40"	3/4"
	BAB-3848	.85 lb.	24	3/8"	48"	3/4"
	BAB-3860	.90 lb.	24	3/8"	60"	3/4"
	BAB-3872	.98 lb.	24	3/8"	72"	3/4"
	BAB-3884	1.10 lbs.	24	3/8"	84"	3/4"
	BAB-5836	1.80 lbs.	24	5/8"	36"	1 1/4"
	BAB-5840	1.85 lbs.	24	5/8"	40"	1 1/4"
	BAB-5848	1.95 lbs.	24	5/8"	48"	1 1/4"
	BAB-5860	2.10 lbs.	24	5/8"	60"	1 1/4"
	BAB-5872	2.30 lbs.	24	5/8"	72"	1 1/4"
	BAB-5884	2.50 lbs.	24	5/8"	84"	1 1/4"

### SPECIFICATIONS

**Stainless Steel Band** – Type 201 annealed Stainless Steel with minimum tensile of 95,000 P.S.I., and minimum yield of 45,000 P.S.I. Furnished in sizes of .030" thickness x 3/4" width and .044" thickness x 1 1/4" width.

**Aluminum Hardware Extrusions** – 6061-T6 Aluminum Alloy. This alloy conforms to ASTM B 221. A minimum tensile strength 38,000 P.S.I., and minimum yield strength of 35,000 P.S.I.

**Carriage Bolt** – High strength Grade 5 carriage bolt (ASTM A-449), furnished in 3/8" x 6" and 5/8" x 8" sizes.

### STANDARD 100' LENGTH BANDS

CATALOG #	WEIGHT EACH	STD. CARTON	HARDWARE	LENGTH	BAND
3/4-201-SSB-100	8.00 lbs.	1	3/8"	100'	3/4"
1 1/4-201-SSB-100	19.00 lbs.	1	5/8"	100'	1 1/4"

### BUCKLES FOR 100' BANDS

CATALOG #	WEIGHT EACH	STD. CARTON
BAB 38	.5 lbs.	24
BAB 58	1.25 lbs.	24


### STANDARD LENGTH DOUBLE BAND

CATALOG #	WEIGHT/EA.	STD. CARTON	HARDWARE	LENGTH	BAND
BAB-5836-2	3.50 lb.	24	5/8"	36"	1 1/4"
BAB-5848-2	4.00 lb.	24	5/8"	48"	1 1/4"
BAB-5888-2	7.50 lb.	24	5/8"	88"	1 1/4"

## BANDING STRENGTH TESTS

### MAXIMUM BAND CAPACITY

These tests were conducted with special large steel fittings to illustrate the maximum recommended loadings of the stainless steel bands. Aluminum alloy fittings such as the BGA, HDBB, or BB are generally weaker than these values. For stronger hardware, contact the factory.

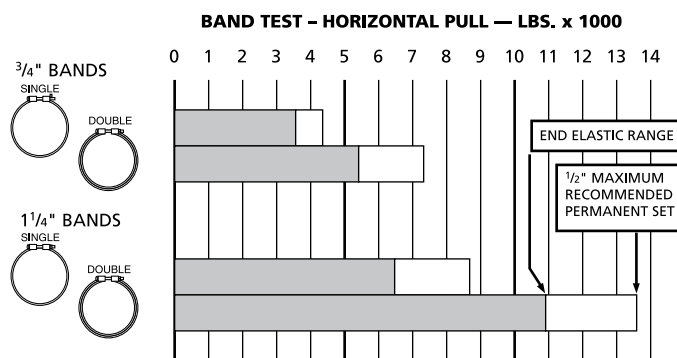

### BAND STRENGTH WITH ALUMINUM OR STEEL ALLOY FITTINGS

