

NOTE: DIMENSIONS ARE MEASURED AT THE INTERSECTION OF PROJECTED ADJACENT PLANES


STRUCTURAL INTEGRITY: Designed transformer weight approximately 3500 lbs. with a safety factor of 4.

MANUFACTURING METHOD: Open mold process with a female mold for smooth exterior & pigmented throughout the composite - and gel coated outside for U.V. protection. Wood free construction.

MATERIAL COMPOSITION: Thermoset polyester resin reinforced with fiberglass. Composite matrix.

ELECTRI-GLASS, INC.
63 COMPASS DRIVE
JACKSON, TN. 38301

731-427-0433
731-427-4684 (Fax)
eglass@aeneas.net
www.electri-glass.com

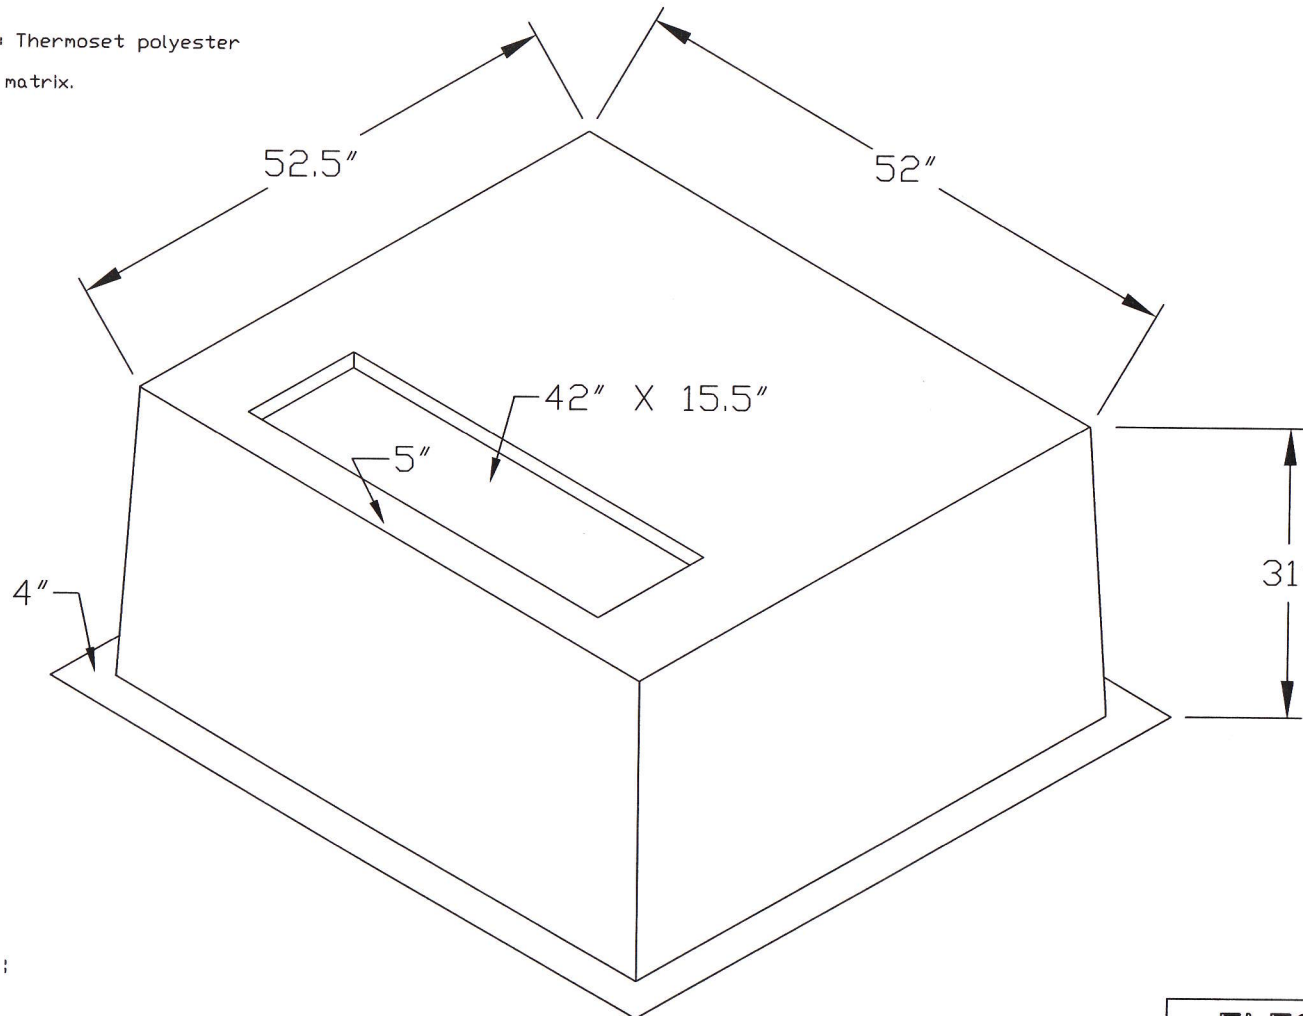

NOT SHOWN:

INTERNAL BEAMS
EXTERNAL MOLDED-IN RIBS

ELECTRI-GLASS INC.	
DATE: 07/06/11	DRAWN BY: J.P.
DWG.# 01	REVISED:
3 PHASE COMPOSITE PAD-VAULT / BOX PAD	
CAT.# : BP3500	