
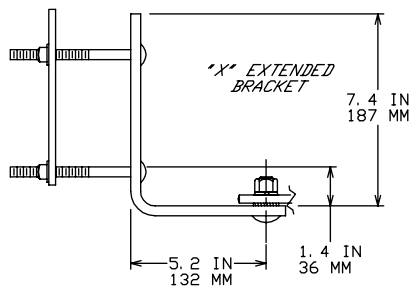
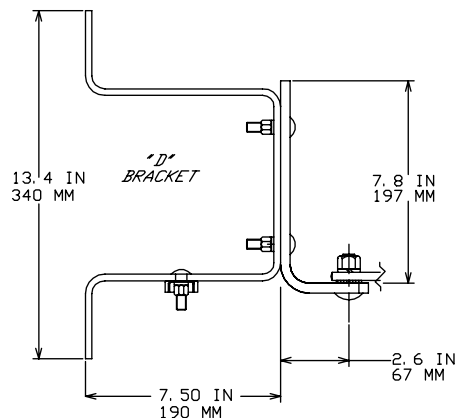


NEMA "B" BRACKET

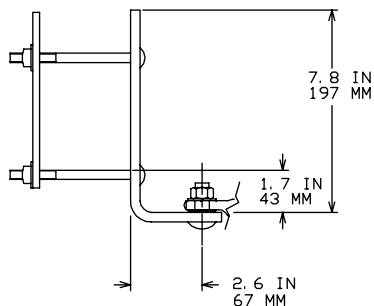

POSITION 7 & 8	KV MAX DESIGN	AMPS	AIC ASYM	FUSEHOLDER "L"	OR BLADE ARC ROD
11	27	100	8000	14.97 IN (380 MM)	NONE
13	27	100	12000	15.06 IN (382 MM)	4.5 IN (114 MM)
42	27	200	10000	15.06 IN (382 MM)	4.5 IN (114 MM)
33	27	300	12000	15.06 IN (382 MM)	NONE
MM	27	NO FUSEHOLDER			

CATALOG NUMBERING SYSTEM



POSITION
1 2 3 4 5 6 7 8 9 10 11
C 7 1 0 - 3

POSITION 11
SPECIAL OPTIONS
S - STAINLESS STEEL

POSITION 10
MOUNTING BRACKET
BLANK OR Z - NO BRACKET
B - NEMA "B" BRACKET
X - EXTENDED BRACKET
D - "D" BRACKET

POSITION 9
TERMINAL OPTIONS
P - PG CLAMPS (TIN PLATING)
E - SMALL EYEBOLT TERMINALS
L - LARGE EYEBOLT TERMINALS
T - FUSE HOLDER ONLY
(POSITION 10 & 11 BLANK)

POSITIONS 7 & 8
FUSEHOLDER

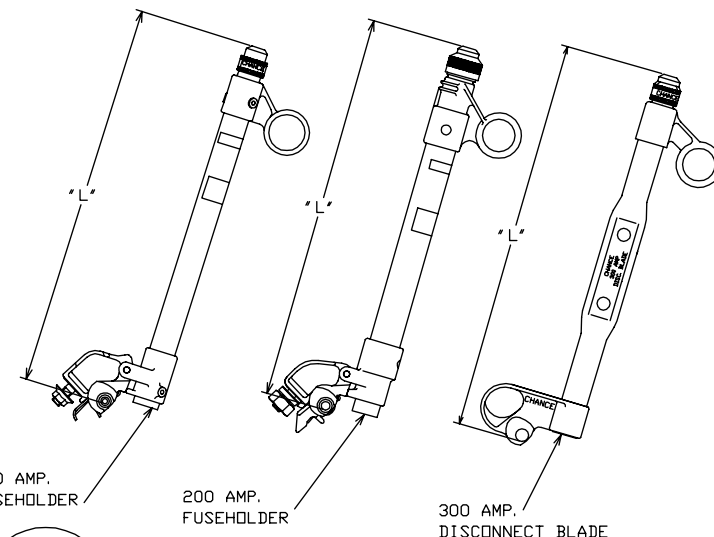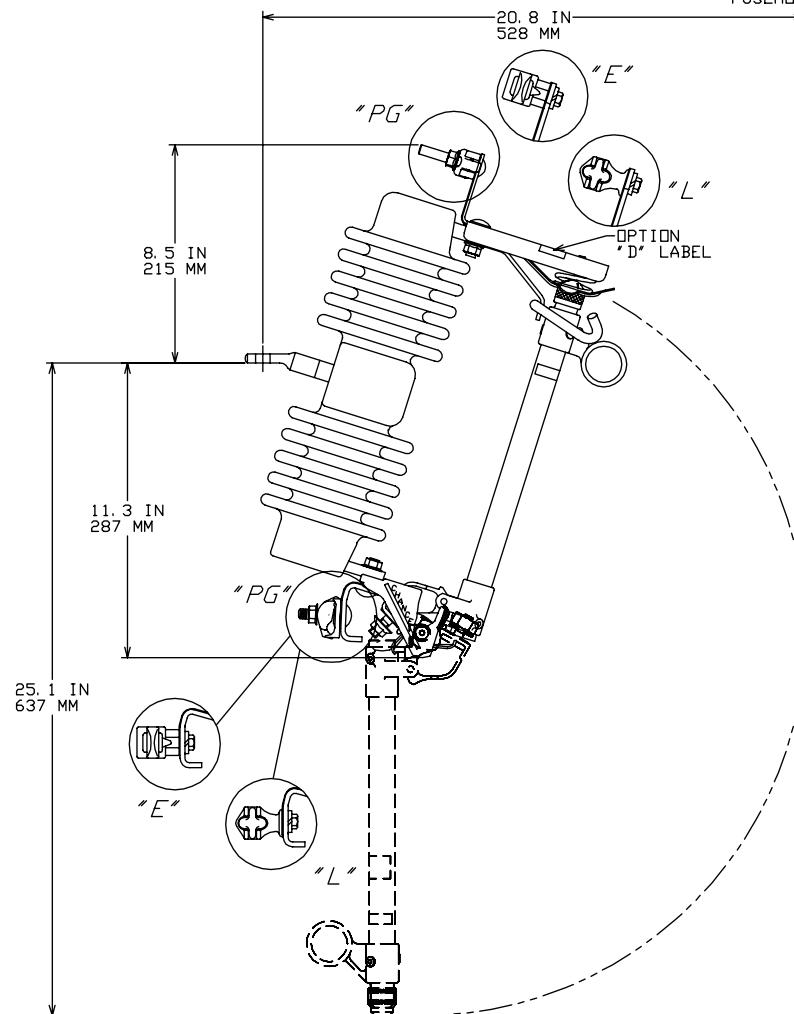

ASSIST SPRING TYPICAL
FOR 100 & 200 AMP
FUSEHOLDERS

DIMENSIONS ARE APPROXIMATE
AND FOR REFERENCE ONLY

CHANCE
EC # 51855 DAC 8/29/13

HUBBELL POWER SYSTEMS
POWER SYSTEMS, INC.

TITLE
CUTOUT
150 KV_BIL

CONFIDENTIAL: THIS DRAWING AND ITS
CONTENTS ARE CONFIDENTIAL AND THE
EXCLUSIVE PROPERTY OF HUBBELL
POWER SYSTEMS. NO PUBLICATION,
DISTRIBUTION OR COPIES MAY BE MADE
WITHOUT THE WRITTEN CONSENT OF
HUBBELL POWER SYSTEMS.
HUBBELL POWER SYSTEMS UNPUBLISHED
ALL RIGHTS RESERVED UNDER THE
COPYRIGHT LAWS.

SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
X	SA710-3	SA710-3	C
DO NOT SCALE THIS DRAWING	DRN BY RLC	DATE 11-20-98	SHEET 01_OF_01