



[Catalog Home](#)

**Product Datasheet**

**CHANCE**

**C75002PPT -- Hubbell® Programmable Resettable Sectionalizer (PRS)**



15/27 kV, 125 kV BIL,  
Programmable Actuating  
Current 10A-480A,  
**Programmable counts 4**  
Count, Loadbreak Sectionalizer  
module only.


**Product Specifications**

<b>Type</b>	Programmable Sectionalizer
<b>Sectionalizer</b>	Programmable Loadbreak Sectionalizer
<b>Mounting</b>	Programmable Module only
<b>System Voltage (BIL)</b>	15/27 kV (125 kV)
<b>Continuous Current (Actuating Current)</b>	300A (Programmable 10-480A)
<b>Terminal Connector(s)</b>	Module only
<b>Bracket</b>	Module only
<b>PDF Catalog Page</b>	Click <a href="#">HERE</a> to view detailed PDF Catalog
<b>Number of Counts</b>	<b>Programmable upto 4</b>

<b>Voltage Class</b>	15/27 kV
<b>BIL (LIW)</b>	125 kV
<b>Surge Current Withstand</b>	65kA, per ANSI C37.63 & IEEE C62.11
<b>Momentary Current Rating</b>	12,000 Amps Asymmetrical
<b>Short time current withstand - 15 Cycle</b>	8,600 Amps Symmetrical
<b>Short time current withstand - 1 sec</b>	4,000 Amps Symmetrical
<b>Short time current withstand - 3 sec</b>	3,200 Amps Symmetrical
<b>Lightning Impulse Withstand (Phase to Ground)</b>	125kV
<b>Lightning Impulse Withstand (Terminal to Terminal)</b>	138kV
<b>Rated Phase to Ground 60 Htz Withstand; Dry (Wet)</b>	42kV (36kV)
<b>Rated Terminal to Terminal 60 Htz Withstand; Dry (Wet)</b>	47kV
<b>Maximum Temperature Rise @ 200A</b>	21.4°C
<b>Ambient Temperature Limits</b>	-40°C to +60°C
<b>Electromagnetic Interference</b>	per ANSI C37.63-1984
<b>Radio Frequency Interference</b>	per ANSI C37.90.2-1994
<b>Electrostatic Discharge</b>	per UL 991, section 15
<b>Frequency</b>	50/60 Hz
<b>Dead Line Detector Threshold</b>	300 milli-amps for 100 milli-seconds
<b>Time Delay for Dead Line Detection</b>	100 milli-seconds +/- 20 milli-seconds
<b>Reset Time</b>	Programmable 30-300 sec
<b>Replacement Module</b>	C75002PPT
<b>Drawing</b>	Click <a href="#">HERE</a> to view drawing of sectionalizer.
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635924840
<b>Standard Package</b>	1
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	1
<b>Pallet Quantity</b>	112
<b>Weight / Ea.</b>	4.9 Lbs

**Compressed Product Number**

C75002PPT

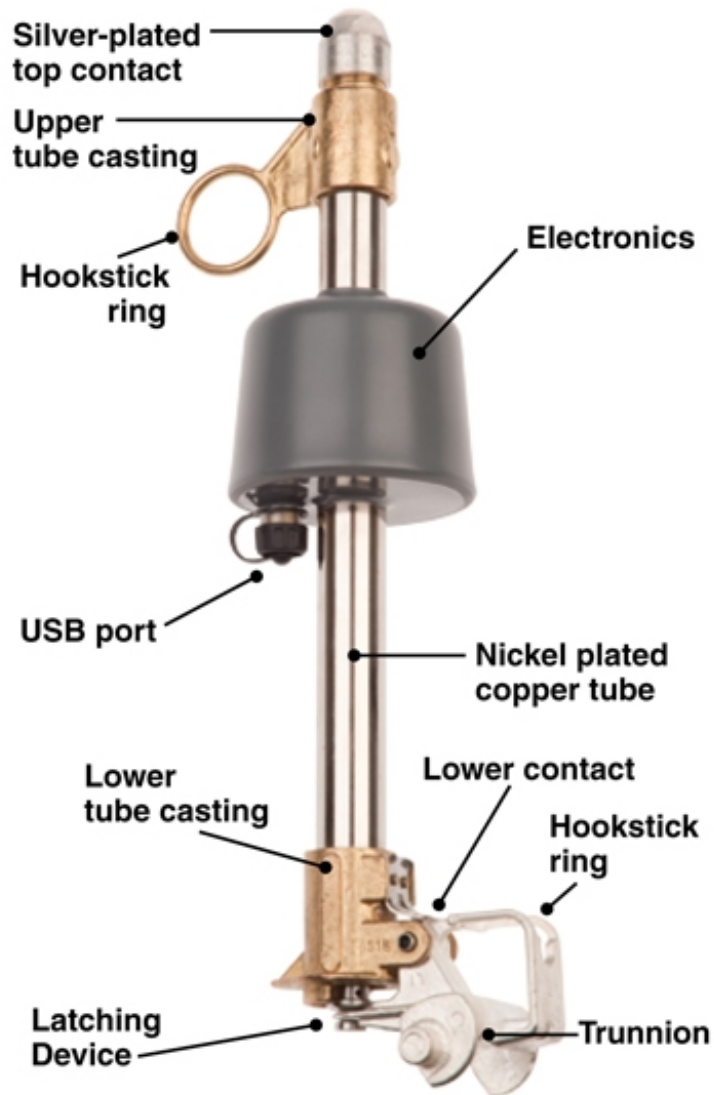

**USB Cable**  
**Cat. No. PSC7400177**  
**(must order separately)**



[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.