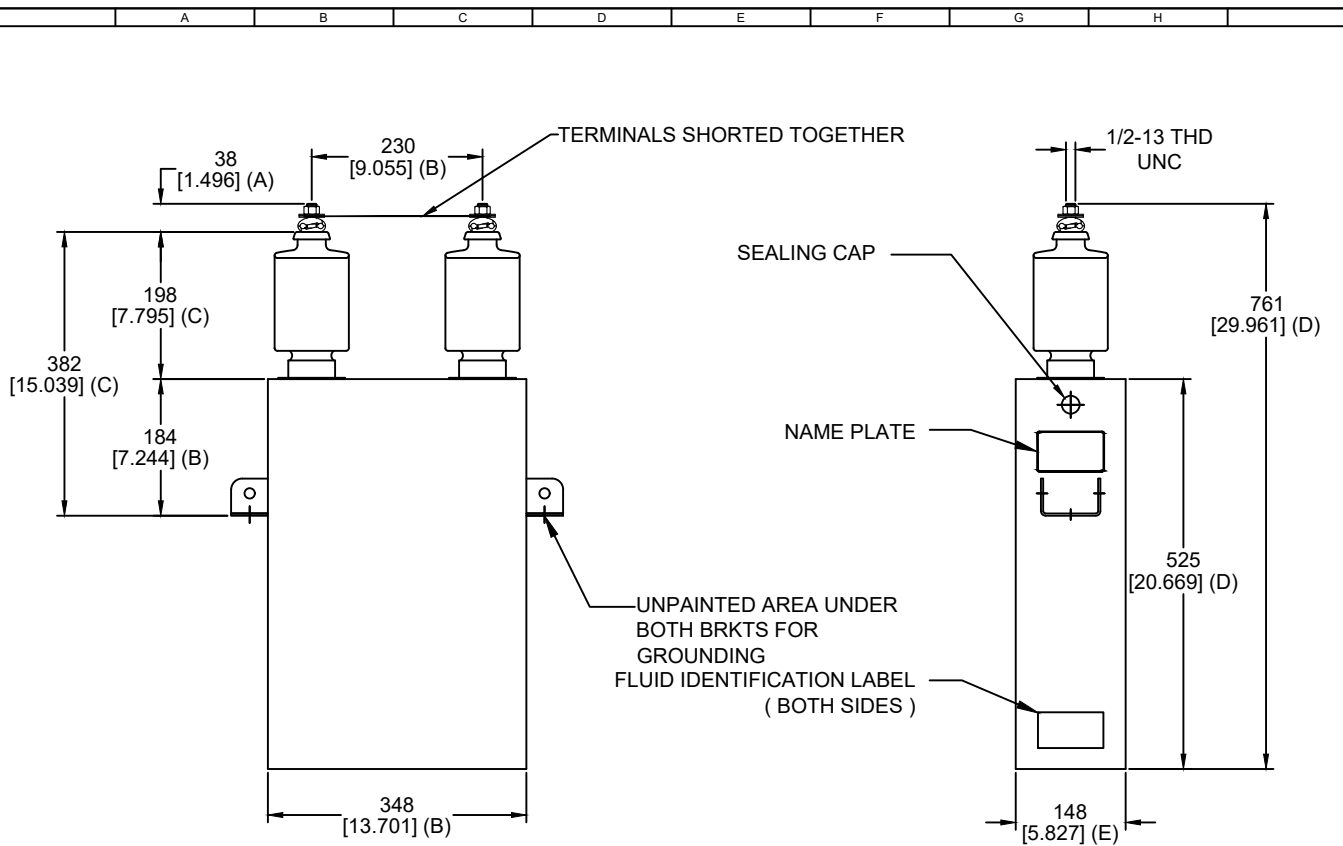


TOL	mm	[in]
A	1.5	[.059]
B	3.0	[.118]
C	4.6	[.181]
D	25.0	[.984]
E	5.0	[.197]

TRINETICS
CATALOG NO.
CHE200A07620B2

NOTE :-

- 1) ALL DIMENSIONS ARE IN MM. [IN.]
- 2) DIMENSIONS INDICATED ARE APPROXIMATE AND THE SAME ARE SUBJECT TO CHANGE DUE TO DESIGN IMPROVEMENTS WITHOUT AFFECTING THE FUNCTIONAL PARAMETERS.
- 3) STAINLESS STEEL SHEET (409) THICKNESS - 1.5 [.059] 16 Ga.
- 4) CREEPAGE DISTANCE OF CAP. BUSHING - 380 [14.96] (MIN.)
- 5) BIL - 95kV (PEAK)
- 6) COLOR SHADE - GRAY ANSI-70
- 7) * CASE SWELLING 12 [.472] (MAX.)
- 8) WEIGHT OF CAPACITOR = 40.0 KGS / 88.0 lbs.(APPROX.)

TRINETICS

	SIGN.	DATE
DRAWN BY		
CHEKD. BY		
APPRD. BY		
DRG-NO-SR-HD-A4-0333-02-2022		

HEAVY DUTY (HD) CAPACITOR
200 KVAR , 7.62 KV , 1 Ø , 60 Hz ,
EXTERNAL FUSE CAPACITOR UNIT

SCALE -
SHEET NO. 1 OF 1
REV. 000