




POLYMER ARRESTER					
BRAND	BLOCK	TYPE	KV	POSITION 4 & 5	A
OB	SMALL	MOV	18	DN	12.2 (310MM)
OB	LARGE	MOV	18	EN	11.5 (292MM)
OB	RISER	MOV	18	FN	12.2 (310MM)

OB = OHIO BRASS
MOV = METAL OXIDE VARISTER




POSITION 7 & 8 FUSE HOLDER					
POSITION 7&8	KV MAX	AMPS	AIC ASYM	"L"	ARC ROD
11	27	100	8,000	14.97 (380 MM)	NONE
13	27	100	12,000	15.06 (383 MM)	4.50 (114 MM)
42	27	200	10,000	15.06 (383 MM)	4.50 (114 MM)
43	27	200	12,000	15.06 (383 MM)	4.50 (114 MM)
33	27	300	12,000	15.06 (383 MM)	NONE
MM	-	-	-	-	-

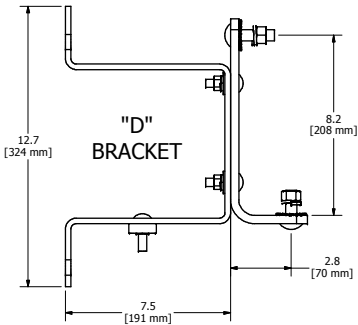

MECHANICAL ASSIST SPRING
FOR 100 AND 200 AMP
FUSEHOLDERS

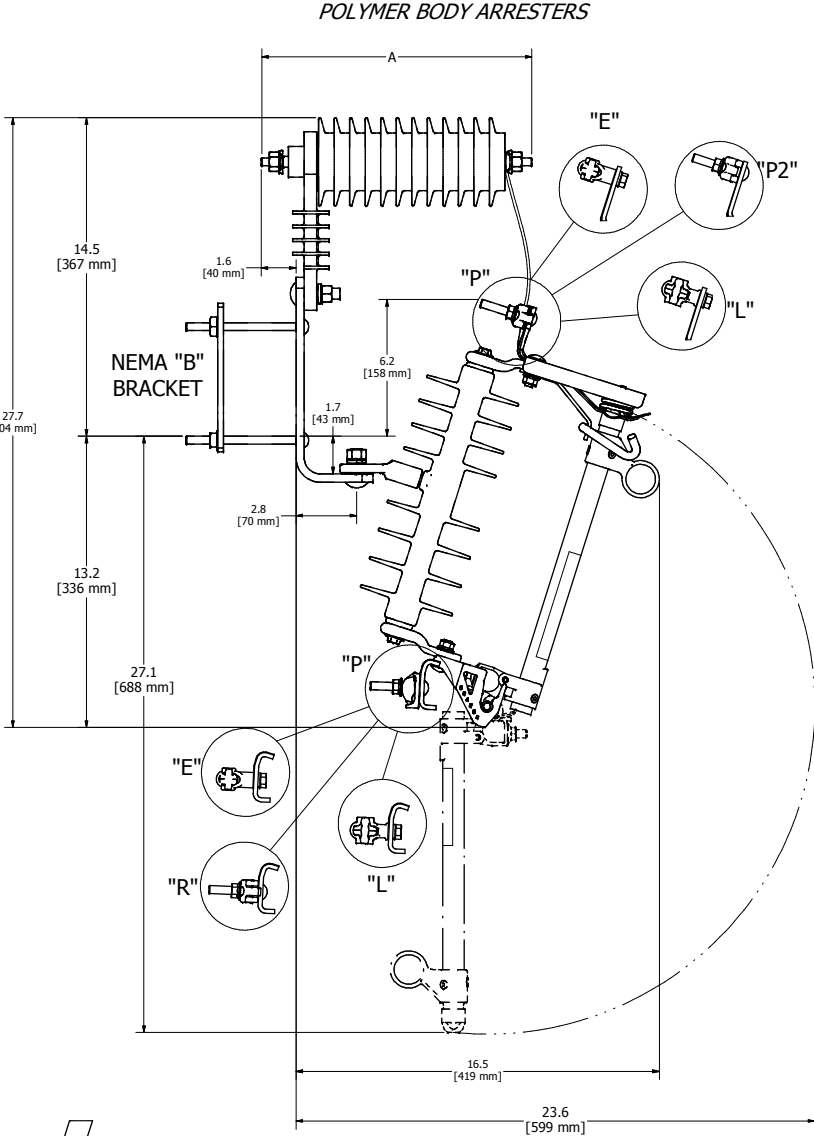

CATALOG NUMBERING SYSTEM

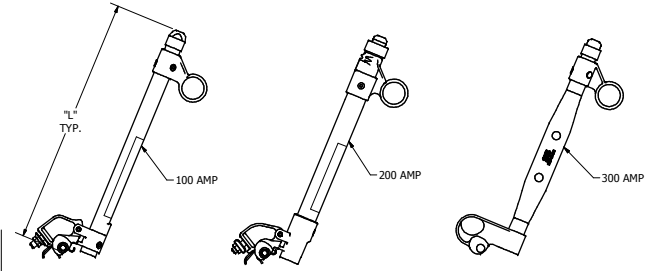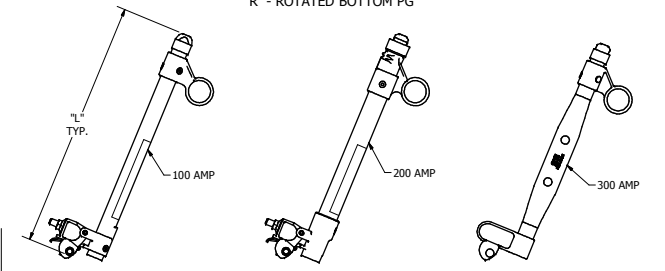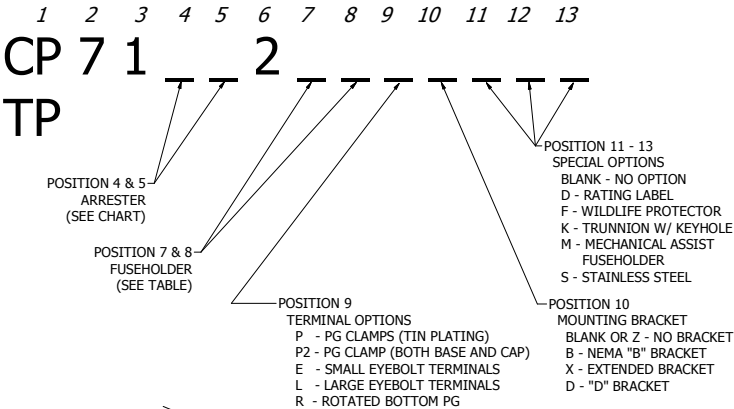

CONFIDENTIAL

CHANCE.		 HUBBELL® POWER SYSTEMS, INC.		HUBBELL POWER SYSTEMS	
EC: 71906 SR DATE: 11-16-17		TITLE CUTOUT, ARRESTER 27 KV POLYMER			
CONFIDENTIAL: THIS DRAWING AND ITS CONTACTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS.		REV B			
HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS		SIZE D	DWG NO. SAP71DN2	CAT / PART / ASSY NO. SEE CHART	REV B
DO NOT SCALE THIS DRAWING		DRN BY COCHRAN		DATE 03-23-13	SHEET 01 OF 01