


REVISIONS					
	REV	DESCRIPTION /MODIFICATIONS	DATE	DWN	APVD
	1	NEW DRAWING	06MAY2020		

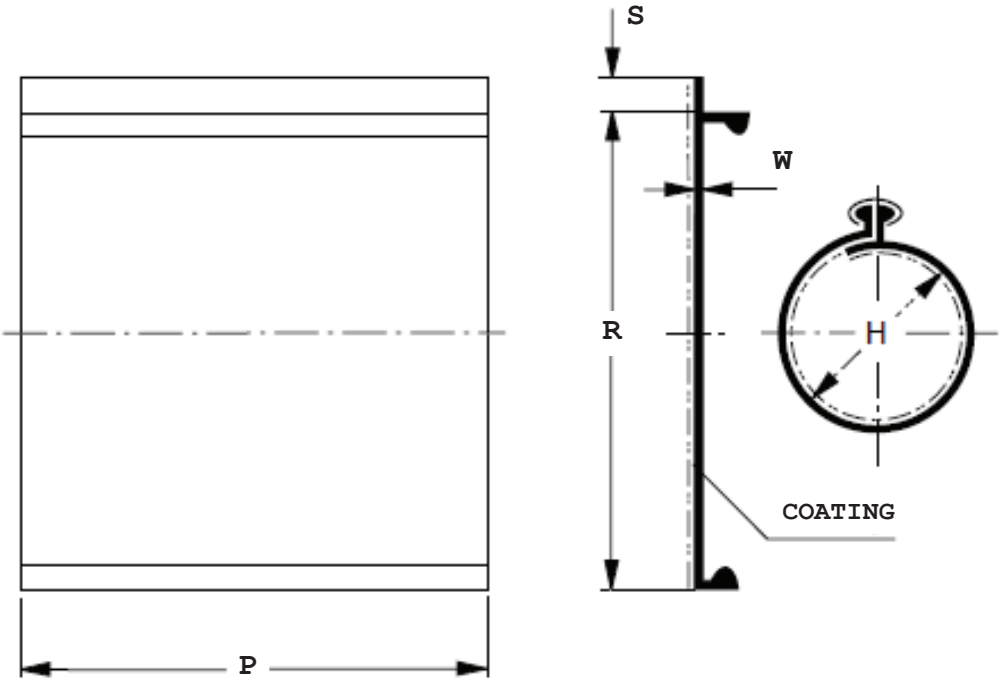


NOTES

1. DIMENSIONS IN mm. a = AS SUPPLIED, b = AFTER FREE RECOVERY
2. COATING CODE: /239. MIN THICKNESS: 0.6 mm
3. STANDARD LENGTHS P (mm): 250, 500, 750, 1000, 1200 and 1500. OTHER CUT LENGTHS AVAILABLE UNDER REQUEST
4. MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: -5%/+10%
- STANDARD CUT LENGTH TOLERANCES:
- ± 5 mm (P ≤ 250)
- ± 10 mm (P > 250)
- ± 15 mm (P>500)
5. STANDARD PRINTING: LOGO, CRSM, PRODUCT SIZE, BATCH NUMBER

PRODUCT SIZE	APPLICATION RANGE		H		R		S	W	
	MIN	MAX	a min	b max	a min	b max	a min	a min	b min
CRSM 34/10	11	27	35	9	110	35	15	0.3	2.4
CRSM 53/13	17	43	54	15	175	49	20	0.3	2.0
CRSM 84/20	24	68	85	21	270	69	32	0.3	2.0
CRSM 107/29	32	86	108	27	340	90	32	0.3	2.0
CRSM 143/36	39	115	144	28	455	119	32	0.3	1.8
CRSM 198/55	60	160	203	50	640	172	32	0.3	2.1
CRSM 250/98	105	200	257	91	810	314	32	0.3	1.7



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWM	BHR	 TE Connectivity				
		CHK	ANM					
DIMENSIONS: mm		APVD: ANM		NAME				
		PRODUCT SPEC		CRSM HEAT SHRINK WRAPAROUND SLEEVE				
		-						
		APPLICATION SPEC		SIZE FORMAT	CAGE CODE	DRAWING NO		RESTRICTED TO
		-		A3	-	EPD-202-32014-01		-
MATERIAL		FINISH						
-		-						
CUSTOMER DRAWING				SCALE NTS		SHEET 1		REV 1