


Type

CSTI/CSTO
Cold shrink termination indoor/outdoor
up to 36 kV

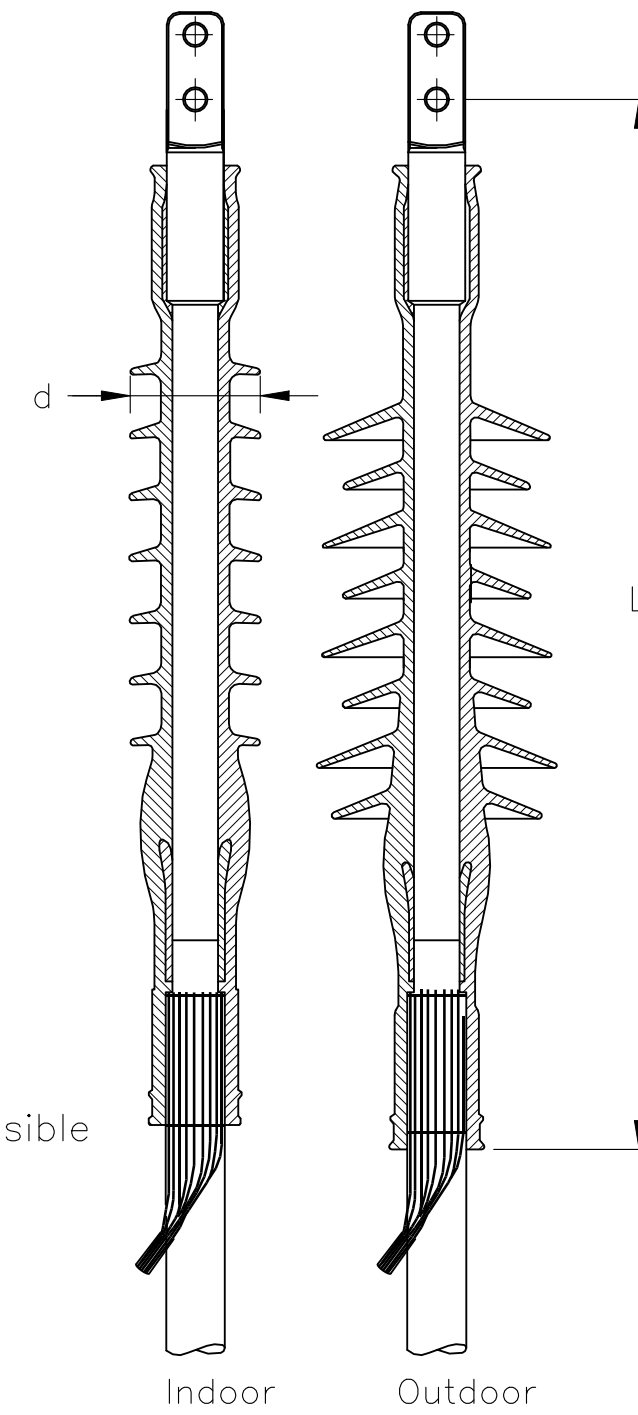

*Based on the ASBT mechanical lugs
Based on ANSI C119.4. variations possible
depending on the cable dimensions
and cable lug configuration

Cold Shrink Terminations indoor/outdoor up to 36kV

Voltage class	Application	Material	L*Approx (mm)	'd' Approx (mm)
20/36kV	Indoor	CSTI-352xx	600	73-100
		CSTI-353xx		
		CSTI-354xx		
	Outdoor	CSTO-352xx	600	135-165
		CSTO-353xx		
		CSTO-354xx		

J	JCN (concentric neutral)
G	Tape shield
HCG**	Corrugated or Flat Strap

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 28/JUL/2022 SATHISH KUMAR G CHK 28/JUL/2022 MICHAEL MARTINI		 TE Connectivity			
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -				NAME MV Cold Shrink Termination CST 15kV 28kV and 35kV	
MATERIAL -		FINISH -		WEIGHT A2 00779 C-ESP-0151-REV.7_22		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE	NTS	SHEET 1 OF 1	REV 2