-NOTES-


MATERIAL:


ARM: FIBERGLASS TUBE FILLED WITH CLOSED CELL FOAM MOUNTING BRACKET & HARDWARE: GALVANIZED STEEL

- COLOR: GRAY (BROWN OPTIONAL) PAINTED WITH UV INHIBITOR PAINT
- ALL CROSSARM HOLES COME STANDARD WITH SLEEVES INSTALLED.
- RECOMMENDED HARDWARE TORQUE: 250 IN-LBS
- HOLES AVAILABLE IN OPTIONAL SIZES DEPENDING ON CATALOG NUMBER:


"CTA": 5/8" HARDWARE "CTF": 3/4" HARDWARE

6. FOR A COMPLETE LIST OF OPTIONS SEE SMART NUMBERING SYSTEM ON SHEET 2

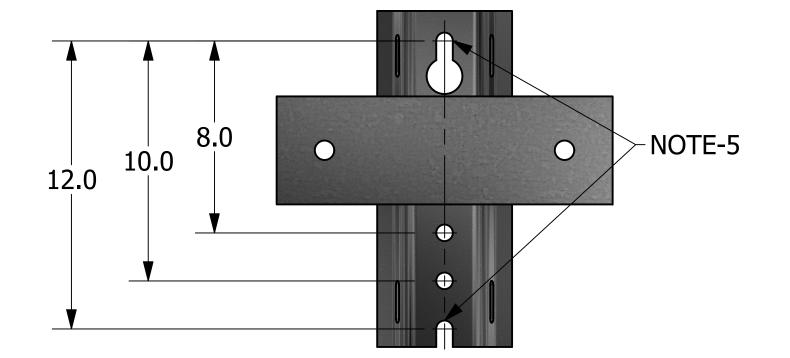

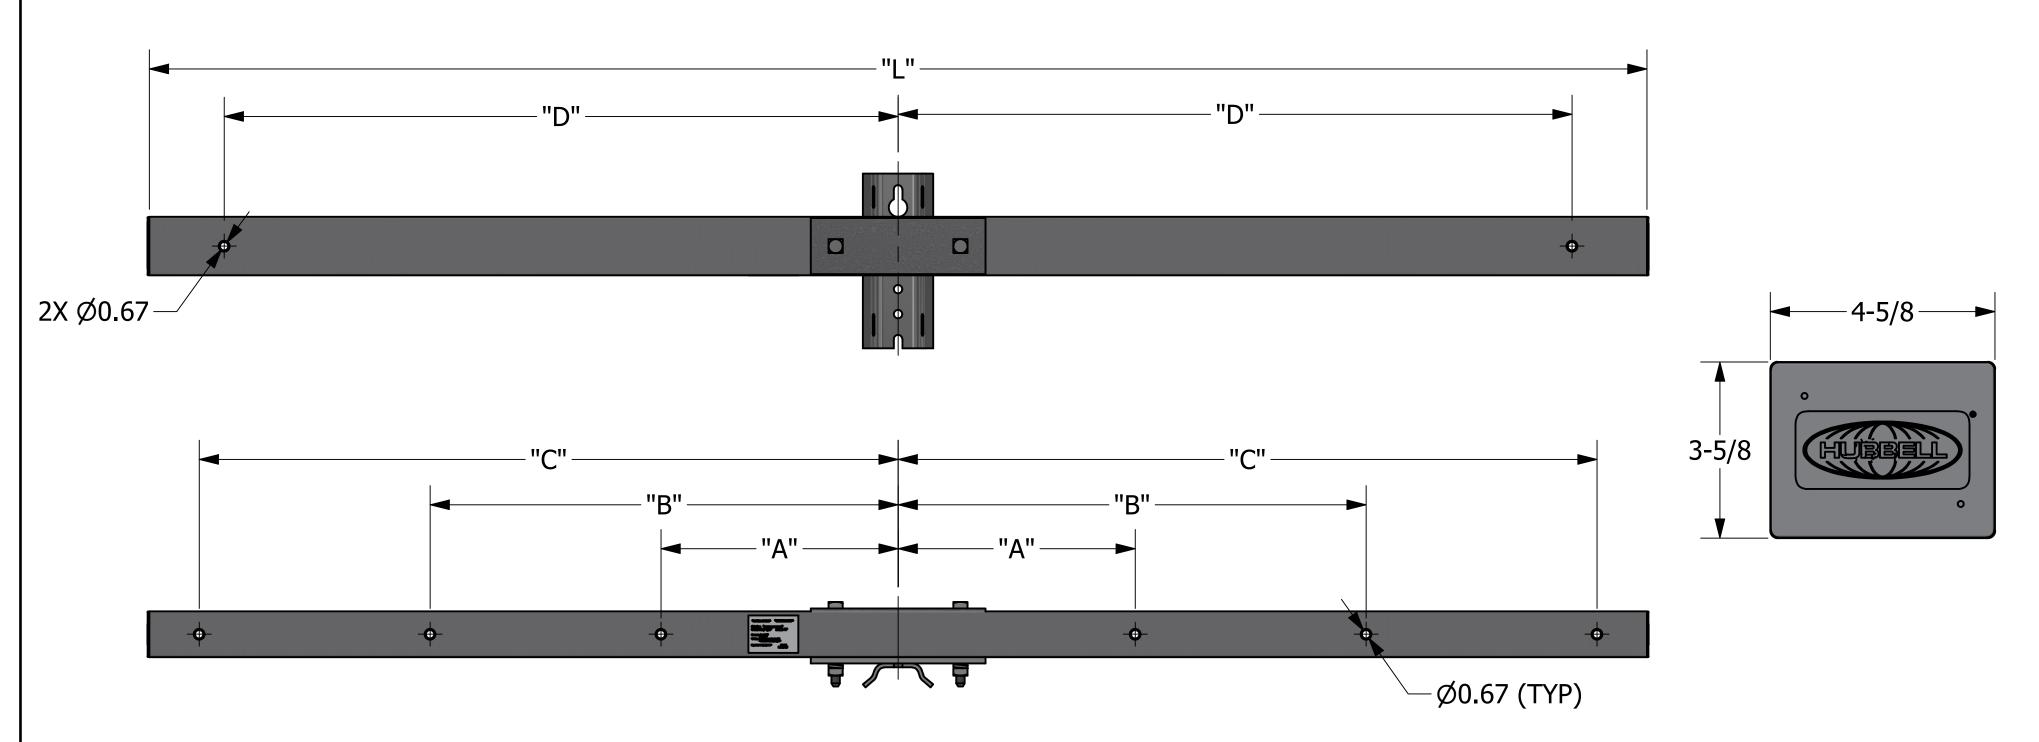

CATALOG NUMBER (NOTE-6)	RUS DRILL PATTERN	"L"	"A"	"B"	"C"	"D"	NO. OF WIRES	ULTIMATE RATING (PER WIRE)
CTA20G096N4003B	03	96"	15"	N/A	44"	42"	4	3,500 LBS
CTA20G096N6004B	04	96"	15"	29.5"	44"	42"	6	2,250 LBS
CTA20G120N4007B	N/A	120"	19"	N/A	56"	54"	4	3,375 LBS
CTA20G120N6005B	05	120"	19"	37.5"	56"	54"	6	2,250 LBS
CTA20G144N4008B	N/A	144"	38"	N/A	66"	68"	4	3,250 LBS
CTA20G144N4009B	N/A	144"	38"	53"	66"	68"	6	2,150 LBS

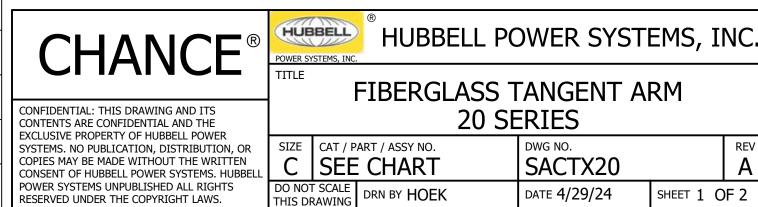

RESERVED UNDER THE COPYRIGHT LAWS.


REV

SHEET 1 OF 2

DATE 4/29/24

HPS 20 SERIES FIBERGLASS TANGENT SMART NUMBERING SYSTEM

CT A 20 G 096 N 4 003 B

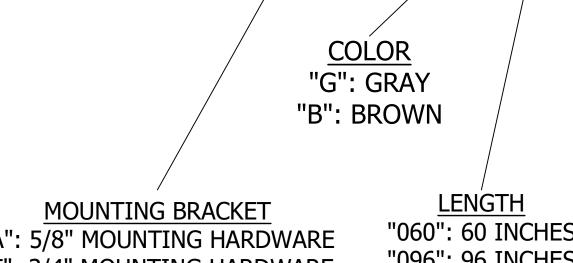

"A": 5/8" MOUNTING HARDWARE "F": 3/4" MOUNTING HARDWARE "060": 60 INCHES "096": 96 INCHES

"120": 120 INCHES "144": 144 INCHES

NO. OF WIRES "4": 4-WIRES "6": 6-WIRES

SLEÈVES ALL HPS CROSSARMS COME STANDARD WITH SLEEVES INSTALLED

DRILL PATTERN

"003": RUS STANDARD 96" TANGENT (4-WIRE) "004": RUS STANDARD 96" TANGENT (6-WIRE) "007": HPS STANDARD 120" TANGENT (4-WIRE) "005": RUS STANDARD 120" TANGENT (6-WIRE) "008": HPS STANDARD 144" TANGENT (4-WIRE) "009": HPS STANDARD 144" TANGENT (6-WIRE) (CONSULT FACTORY FOR CUSTOM DRILL PATTERNS)

