



ALUMA-FORM®

Dead End Clamps

BOLTED, STRAIGHT LINE CLAMP - ALUMINUM

Side Opening Style

Material(s):





Body: 356-T6 Aluminum

Keeper: 356-T6 Aluminum

Hardware: U-Bolts, Washer, & Hex Nut - galvanized steel

5/8" Clevis Pin: Galvanized Steel

Cotter Pin: Stainless Steel

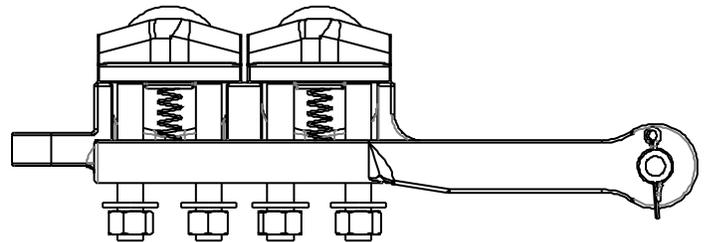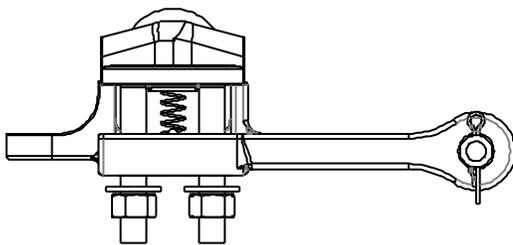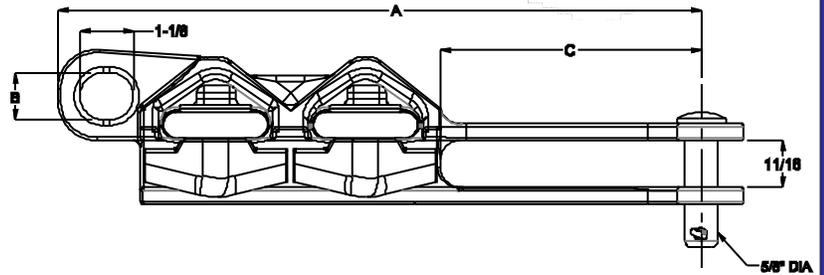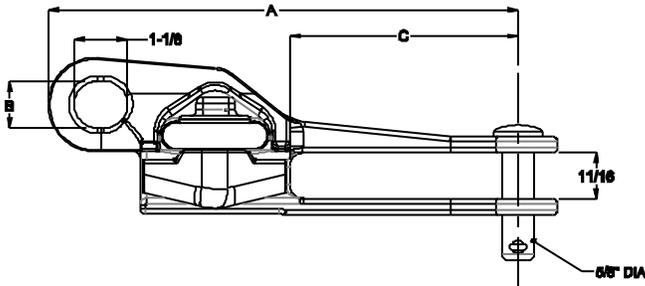

Catalog Name	Conductor Range			Ultimate Strength		Dimensions			Weight
	Inches	ACSR	Aluminum	Body (lbs)	Eye (lbs)	"A"	"B"	"C"	
DES-ASO-398-1-N	.198-.447	6-2/0	4-3/0	6000	6000	7.75	1	3.5	1.31
DES-ASO-398-1-N-TP	.198-.447	6-2/0	4-3/0	6000	6000	7.75	1	3.5	1.31
DES-ASO-570-1-N	.190-.570	6-4/0	6-4/0	8000	8000	9.75	1	5.13	1.68
DES-ASO-684-1-N	.250-684	4-336.4	2-350	8000	8000	9.13	1	4.25	1.72
DES-ASO-684-1-N-M	.250-684	4-336.4	2-350	8000	8000	9.13	1	4.25	3.29
DES-ASO-684-1-N-TP	.250-684	4-336.4	2-350	8000	8000	9.13	1	4.25	1.72
DES-ASO-684-2-N	.250-684	4-336.4	2-350	8000	8000	9.13	1	4.25	1.72
DES-ASO-858-1-N	.250-.888	4-556.5	2-556.5	12000	9000	13.5	1	5	4
DES-ASO-858-2-N	.250-.888	4-556.5	2-556.5	12000	9000	13.5	1	5	4
DES-ASO-858-2-N-TP	.250-.888	4-556.5	2-556.5	12000	9000	13.5	1	5	4

-TP is for Tin Plated

-M is for Marine Grade, 316 Stainless Steel