


REVISIONS				
NO.	DATE	DESCRIPTION	BY	CKD
2	7/13/12	DRAWN IN CAD	MYL	WCL
3	2/8/21	DLBA MOVE TO AL AND FLIPPED BOLTS	BHB	

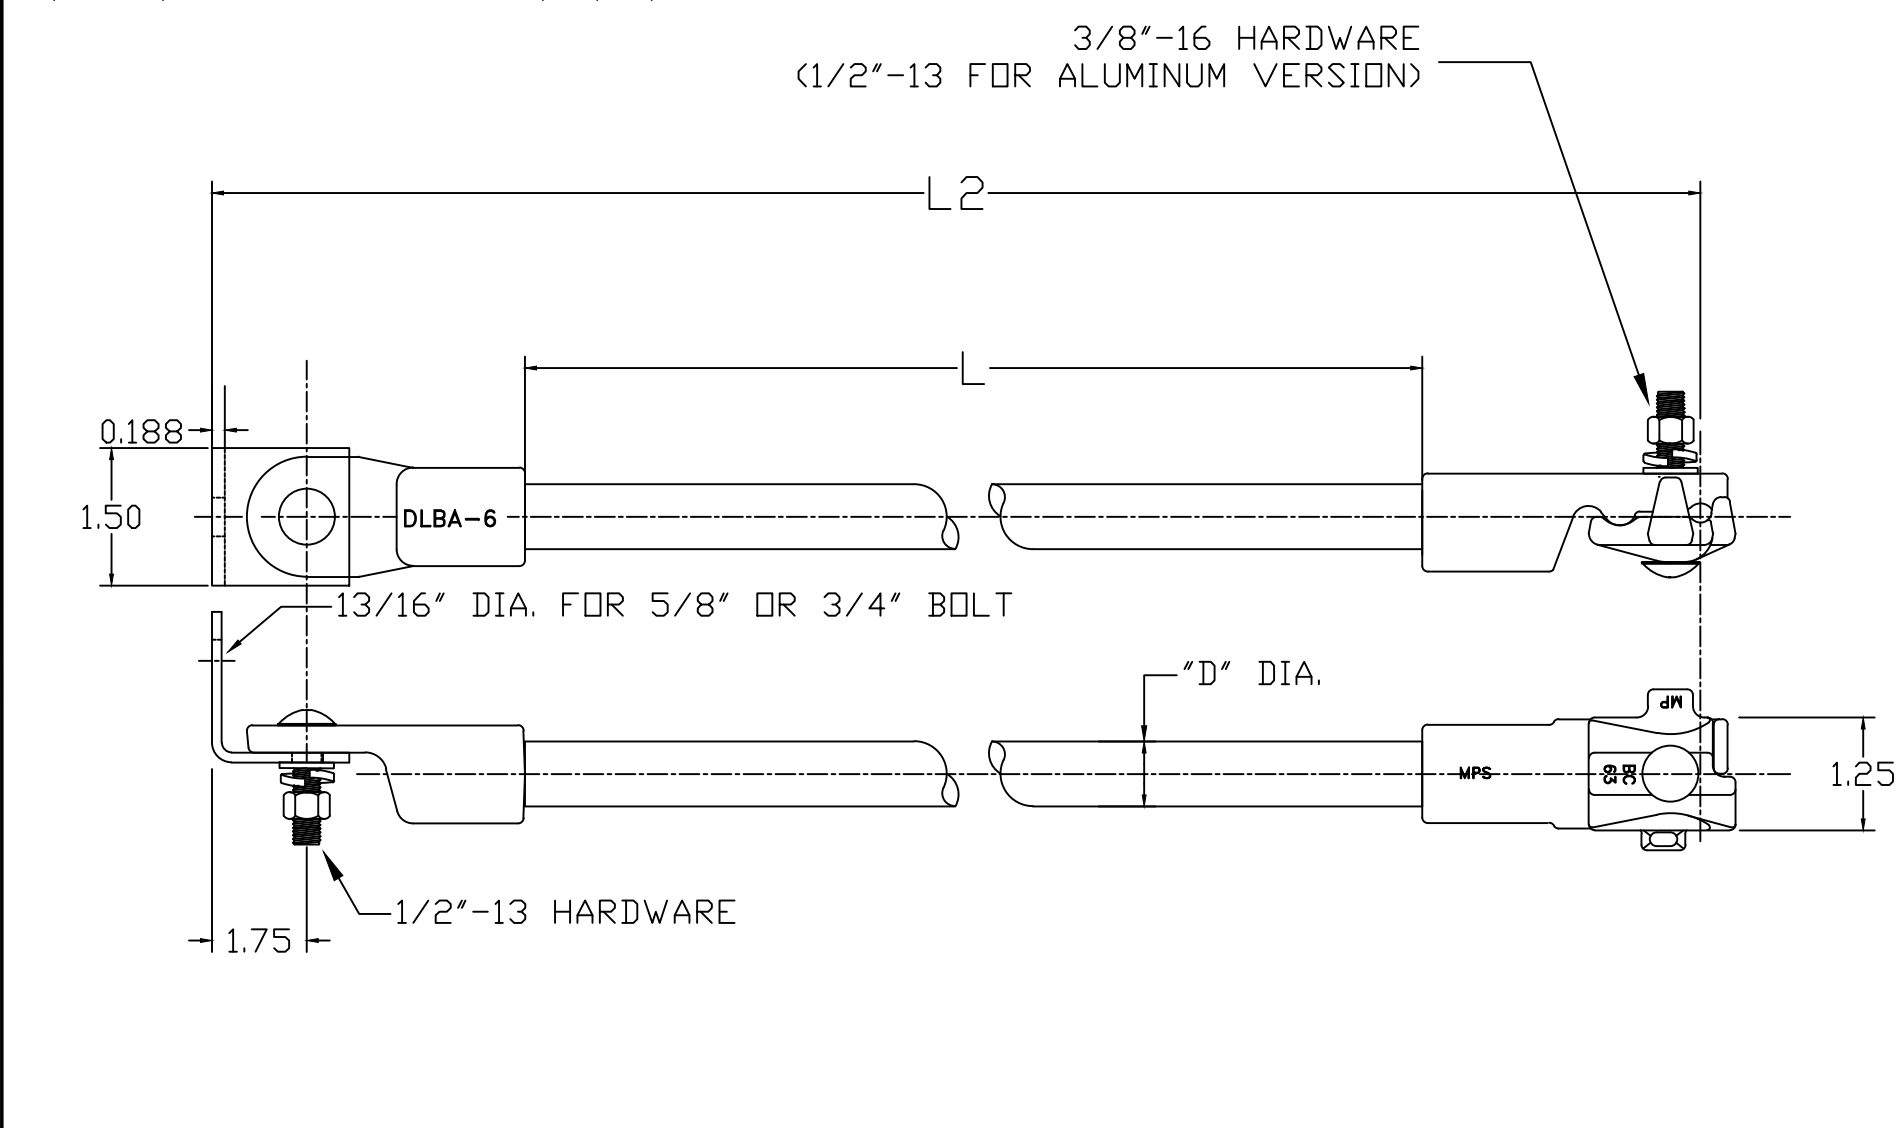

CATALOG NUMBER	LENGTHS (IN)			WIRE RANGE
POLYURETHANE COATED SERIES	L1	L2	D	DIAMETER
DLBA-12	12	19.25	.750	.125-.398
DLBA-12A	12	19.25	.750	.184-.502
DLBA-18	18	25.25	.750	.125-.398
DLBA-24	24	31.25	.750	.125-.398

NOTE: "A" SUFFIX INDICATES ALUMINUM END FITTING.

NOTES:

- 1.0 MATERIAL
 - 1.1 BASE – ALUMINIUM A356-T6
 - 1.2 ROD – FIBERGLASS
 - 1.3 END FITTING – DUCTILE IRON 654512/ ALUMINUM A356-T6 FOR "A" OPTION
 - 1.4 HARDWARE – STEEL
- 2.0 FINISH
 - 2.1 BASE – NONE
 - 2.2 ROD – ULTRAVIOLET PROTECTIVE VEIL COATING, GRAY
 - 2.3 END FITTING – HOT DIP GALVANIZED PER ASTM A153/ NONE FOR "A" OPTION
 - 2.4 HARDWARE – HOT DIP GALVANIZED PER ASTM A153
- 3.0 DIMENSIONS IN INCHES

ENG. REF.

This information is confidential and is the property of Maclean Power Systems. It may not be made public or reproduced except that the Customer may make copies for use solely in instillation, maintenance, and operation of products supplied by Maclean Power Systems.



MACLEAN POWER SYSTEMS
A Maclean-fogg Company

DLBA-”L1” SERIES

DOWN LEAD BRACKET

DATE: 8-5-74

SCALE: 1:1

NO.

DWN. BY: MYL

CKD. BY: WCL

APP. BY: WCL

CEA-1520

R 3

SH. OF