



ALUMA-FORM®

Fiberglass Conductor Supports

Ridge Pin Conductor Supports 1-1/2" & 2" Diameters

Material Specifications

Pole Gain

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (5" to 8" mounting centers)
- Accepts 5/8" pole mounting hardware

End Fitting

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 with Nylon Threads

Fiberglass Rod

- 1-1/2" or 2" diameter Super-Smooth, veiled gray polyester rod with added ultraviolet protection


Pins Threads

- Pins are available with 1" or 1-3/8" Nylon Threads.

Nylon Threads.

"-1" = 1" Nylon Threads

"-2" = 1-3/8" Nylon Threads

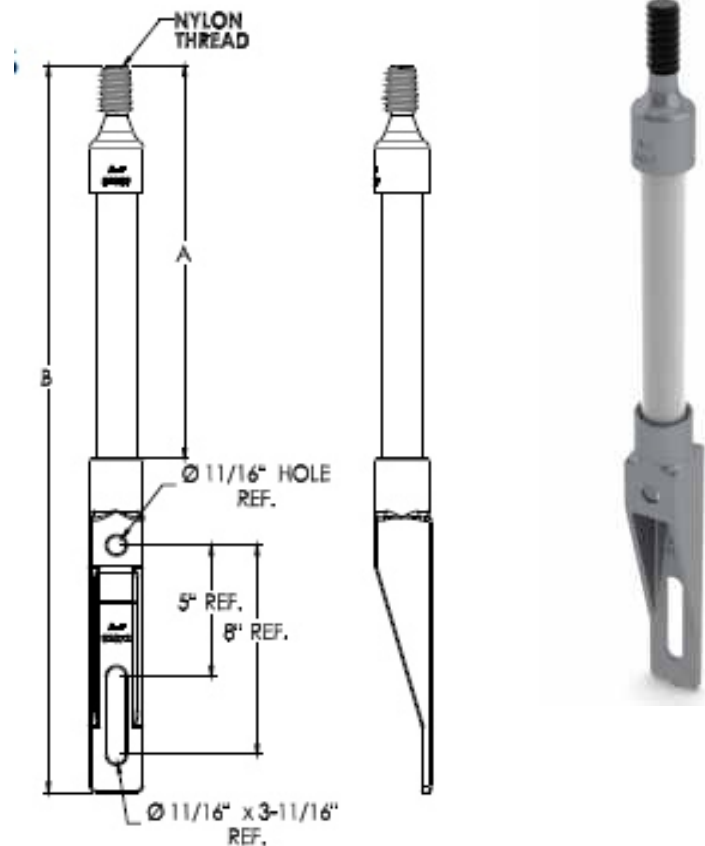

Catalog Number	A"	B"	Rod Diameter	Ultimate Load (lbs) P1 Vert	Ultimate Load (lbs) P2 Long	Ultimate Load (lbs) P3 Trans	Weight (lbs)
F1CS-MV-V13-RHP-1	13	25 3/4	1-1/2"	2500	1600	1600	6.5
F1CS-MV-V15-RHP-1	15	27 3/4	1-1/2"	2500	1500	1500	6.7
F1CS-MV-V18-RHP-1	18	30 3/4	1-1/2"	2500	1400	1400	7.1
F1CS-MV-V21-RHP-1	21	33 3/4	1-1/2"	2500	1200	1200	7.5
F1CS-MV-V23-RHP-1	23	35 3/4	1-1/2"	2500	1000	1000	7.7
F1CS-HV-V18-RHP-1	18	30 3/4	2"	2500	2150	2150	12.1
F1CS-HV-V24-RHP-1	24	36 3/4	2"	2500	1750	1750	12.9
F1CS-HV-V30-RHP-1	30	42 3/4	2"	2500	1300	1300	14.6
F1CS-HV-V36-RHP-1	36	48 3/4	2"	2500	1100	1100	15.9

Notes:

1. Custom lengths available, contact factory or local sales representative.
2. For 1-3/8" Nylon Threads change the catalog name for "-1" to "-2".
3. Silicone Coating - contact factory or local sales representative