



FIBERGLASS EQUIPMENT MOUNTS

Three Phase/Double Position 0° Mount

Material Specifications

Pole Gain


- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153 (6" to 8" mounting centers)
- Accepts 5/8" pole mounting hardware
- Can be banded using the Aluma-Form Bolt-A-Band banding system.

End Fitting

- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

Fiberglass Rod

- 1-1/2" diameter Super-Smooth, proprietary veiled gray polyester rod with added ultraviolet protection

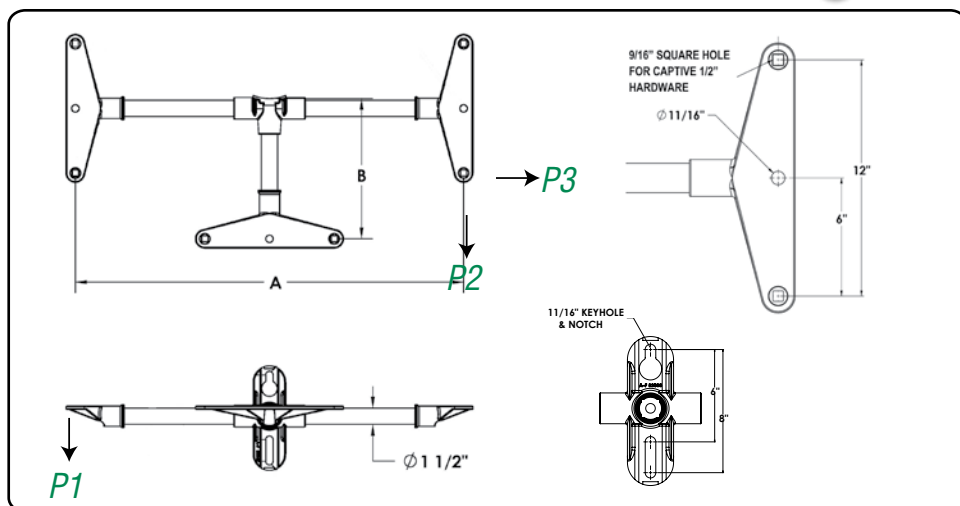

Catalog Name	Rod Diameter	Outside Standoff Length, A ¹	Middle Standoff Length, B ¹	Hardware ²	Ultimate Load			Weight
					P1 (lbs)	P2 (lbs)	P3 (lbs)	
F3CA-MV-H3613-D3	1-1/2"	36"	13"	No	1,200	900	10,000	19.4 lbs.
F3CA-MV-H3613-D3-H	1-1/2"	36"	13"	Yes	1,200	900	10,000	20.7 lbs.
F3CA-MV-H3618-D3	1-1/2"	36"	18"	No	1,200	900	10,000	20.0 lbs.
F3CA-MV-H3618-D3-H	1-1/2"	36"	18"	Yes	1,200	900	10,000	21.3 lbs.
F3CA-MV-H4813-D3	1-1/2"	48"	13"	No	900	700	10,000	20.9 lbs.
F3CA-MV-H4813-D3-H	1-1/2"	48"	13"	Yes	900	700	10,000	22.2 lbs.
F3CA-MV-H4818-D3	1-1/2"	48"	18"	No	900	700	10,000	21.5 lbs.
F3CA-MV-H4818-D3-H	1-1/2"	48"	18"	Yes	900	700	10,000	22.8 lbs.
F3CA-MV-H4824-D3	1-1/2"	48"	24"	No	900	700	10,000	22.3 lbs.
F3CA-MV-H4824-D3-H	1-1/2"	48"	24"	Yes	900	700	10,000	23.6 lbs.

Notes:

1. Custom lengths available, contact factory or local sales representative.
2. Standard hardware includes captured 1/2" x 2" carriage bolt, 1/2" hex nut, 1/2" lock washer, & 1/2" star washer.