



21K GUYSTRAINS – CLEVIS / THIMBLE-EYE

**SPECIFICATIONS**


**FITTINGS:** DUCTILE IRON, 654512

**ROD:** SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

**HARDWARE:** STEEL, HOT DIP GALVANIZED (CLEVIS PIN) / STAINLESS STEEL (COTTER PIN)

CATALOG NUMBER	LENGTH "A" INCHES	LENGTH "B" INCHES
FCTE21-12	12	20-1/2
FCTE21-18	18	26-1/2
FCTE21-24	24	32-1/2
FCTE21-30	30	38-1/2
FCTE21-36	36 </td <td>44-1/2</td>	44-1/2
FCTE21-42	42	50-1/2
FCTE21-54	54	62-1/2
FCTE21-60	60	68-1/2
FCTE21-78	78	86-1/2
FCTE21-96	96	104-1/2
FCTE21-120	120	128-1/2
FCTE21-144	144	152-1/2

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

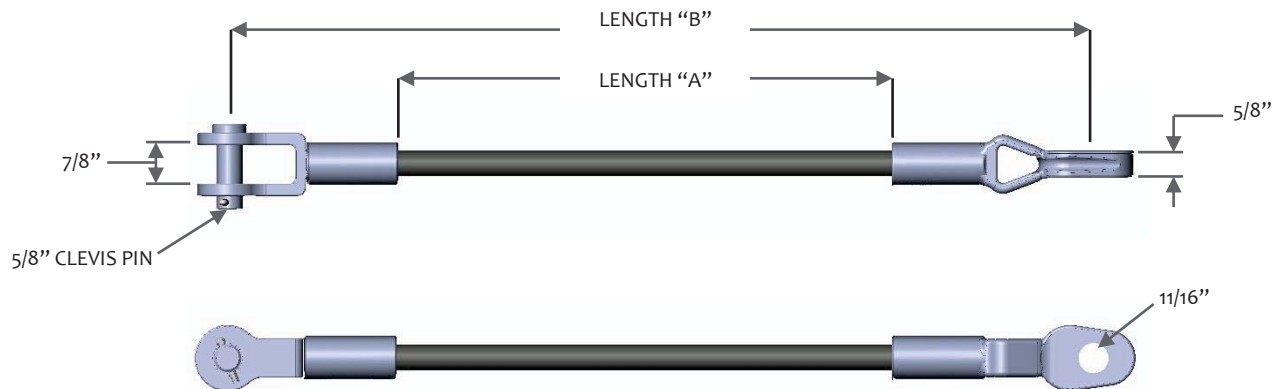

**NOTE:**  
FOR OTHER LENGTHS PLEASE CONTACT US.  
ADD SUFFIX "R" FOR (1) ROLLER (Example: FCTE21-18R).