



# FIBERGLASS GUY STRAIN INSULATORS

## 21,000 Pound Rating: Clevis & Thimble Eye



### Material Specifications

#### End Fitting


- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

#### Fiberglass Rod

- Super-Smooth, proprietary veiled gray polyester rod with added ultraviolet protection

#### Minimum Ultimate Strength Rating

- 21,000 pounds

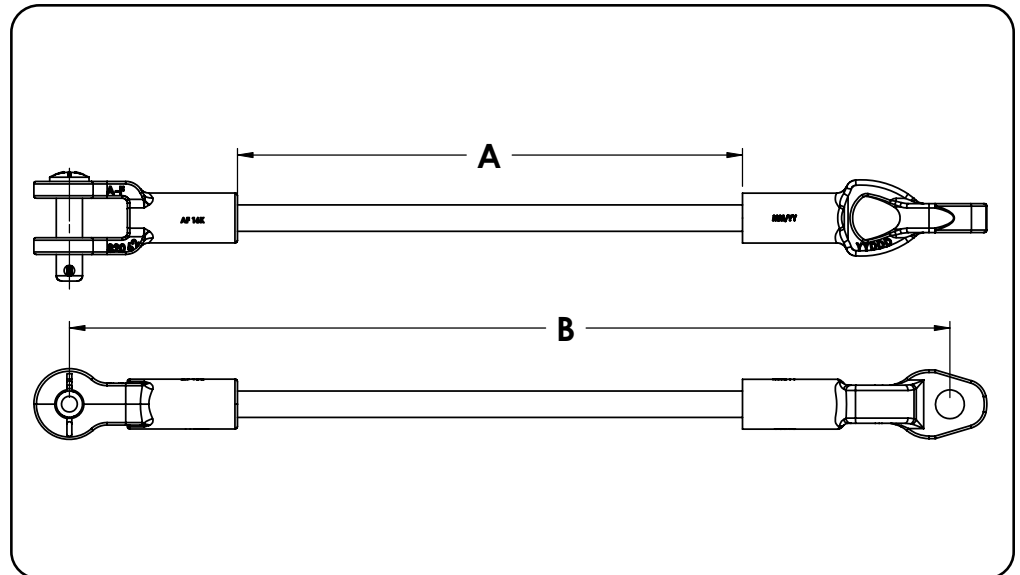

Catalog Name	Strength, lbs.	Length "A", inches <sup>1</sup>	Length "B", inches	1st End Fitting	2nd End Fitting	Weight, lbs
FGS21-12CT	21,000	12	20.9	Clevis	Thimble Eye	3.2
FGS21-18CT	21,000	18	26.9	Clevis	Thimble Eye	3.3
FGS21-24CT	21,000	24	32.9	Clevis	Thimble Eye	3.4
FGS21-36CT	21,000	36	44.9	Clevis	Thimble Eye	3.7
FGS21-42CT	21,000	42	50.9	Clevis	Thimble Eye	3.8
FGS21-54CT	21,000	54	62.9	Clevis	Thimble Eye	4.1
FGS21-60CT	21,000	60	68.9	Clevis	Thimble Eye	4.2
FGS21-78CT	21,000	78	86.9	Clevis	Thimble Eye	4.6
FGS21-96CT	21,000	96	104.9	Clevis	Thimble Eye	5.0
FGS21-120CT	21,000	120	128.9	Clevis	Thimble Eye	5.6
FGS21-144CT	21,000	144	152.9	Clevis	Thimble Eye	6.1

#### Notes:

1. Custom lengths available, contact factory or local sales representatives