



FIBERGLASS GUY STRAIN INSULATORS

21,000 Pound Rating: Clevis & Clevis w/ Roller



Material Specifications

End Fitting


- 65-45-12 Ductile Iron, hot-dipped galvanized per ASTM A153

Fiberglass Rod

- Super-Smooth, proprietary veiled gray polyester rod with added ultraviolet protection

Minimum Ultimate Strength Rating

- 21,000 pounds

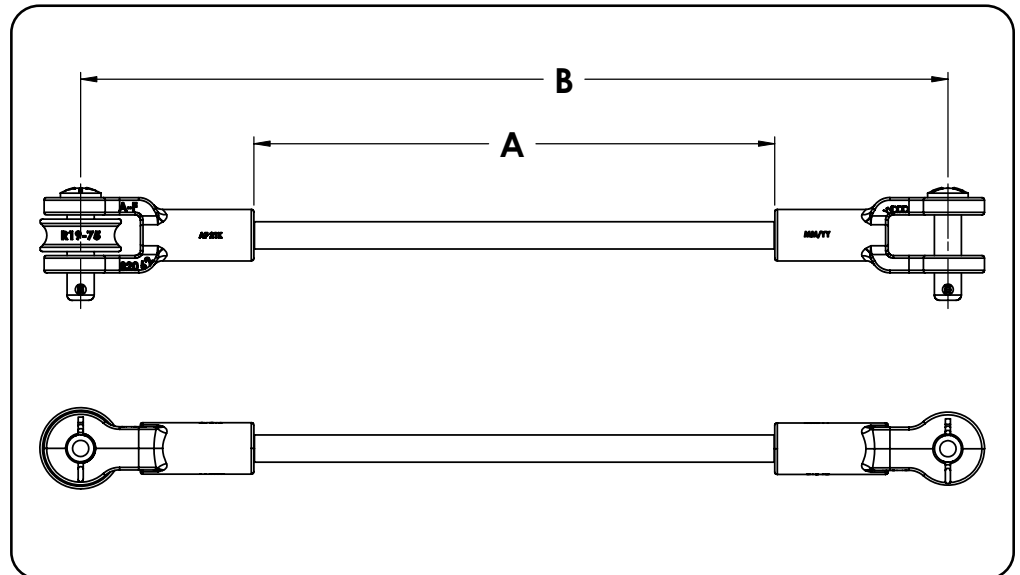

Catalog Name	Strength, lbs.	Length "A", inches ¹	Length "B", inches	1st End Fitting	2nd End Fitting	Weight, lbs
FGS21-12CR	21,000	12	20	Clevis	Clevis w/ Roller	3.6
FGS21-18CR	21,000	18	26	Clevis	Clevis w/ Roller	3.8
FGS21-24CR	21,000	24	32	Clevis	Clevis w/ Roller	3.9
FGS21-36CR	21,000	36	44	Clevis	Clevis w/ Roller	4.2
FGS21-42CR	21,000	42	50	Clevis	Clevis w/ Roller	4.3
FGS21-54CR	21,000	54	62	Clevis	Clevis w/ Roller	4.6
FGS21-60CR	21,000	60	68	Clevis	Clevis w/ Roller	4.7
FGS21-78CR	21,000	78	86	Clevis	Clevis w/ Roller	5.1
FGS21-96CR	21,000	96	104	Clevis	Clevis w/ Roller	5.5
FGS21-120CR	21,000	120	128	Clevis	Clevis w/ Roller	6.0
FGS21-144CR	21,000	144	152	Clevis	Clevis w/ Roller	6.6

Notes:

1. Custom lengths available, contact factory or local sales representatives