



DOUBLE PHASE 15° VERTICAL CONDUCTOR SUPPORT BRACKETS

SPECIFICATIONS

BASE: DUCTILE IRON, 654512


ROD: SOLID, ELECTRICAL GLASS ROVING WITH ULTRA-VIOLET INHIBITORS. VEIL COATED.

FITTING: DUCTILE IRON, 654512

HARDWARE: STEEL, HOT DIP GALVANIZED

CATALOG NUMBER	PHASE SPACING "A" INCHES	MINIMUM ULTIMATE LOAD (LBS)		
		VERTICAL A	LONG B	TRANS. C
FLH2-2-36-V1	36	2550	2000	2500
FLH2-2-42-V1	42	2400	1700	2500
FLH2-2-48-V1	48	2250	1500	2500
FLH2-2-60-V1	60	1950	1200	2500

RECOMMENDED WORKING LOAD 50% OF RATING LISTED

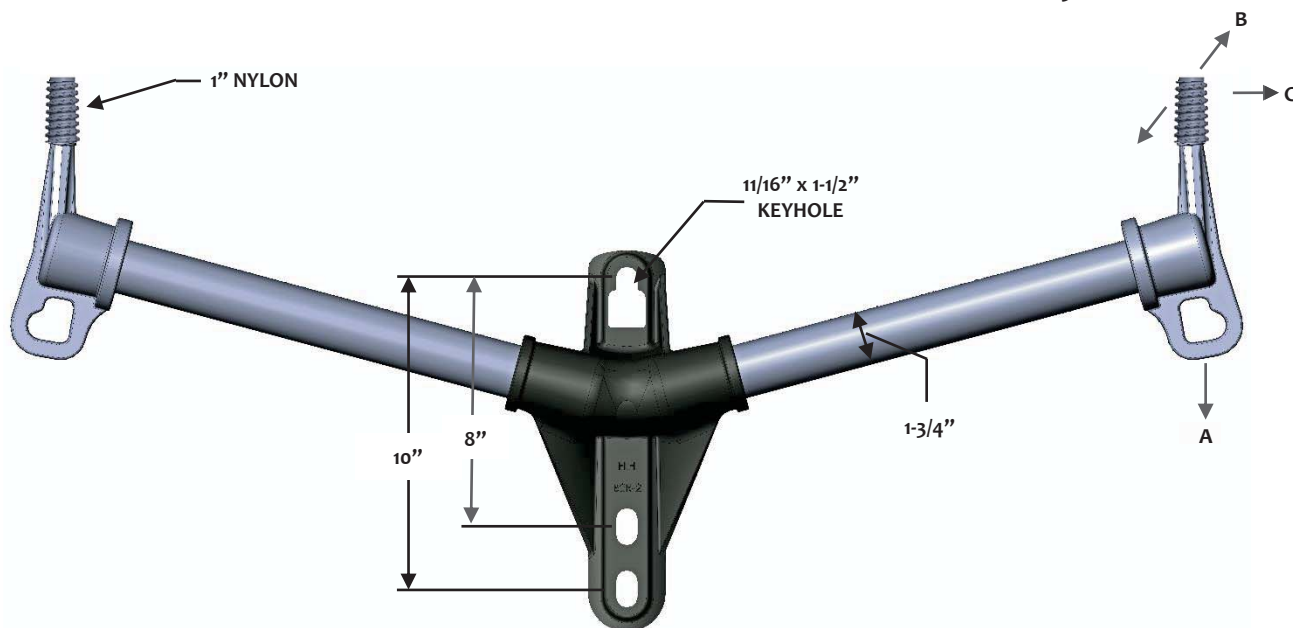

NOTE:

FOR OTHER LENGTHS PLEASE CONTACT US.

TO SPECIFY SILICONE COATED ROD, ADD SUFFIX "SC" (I.E. = FLH2-1-36-V1-SC)