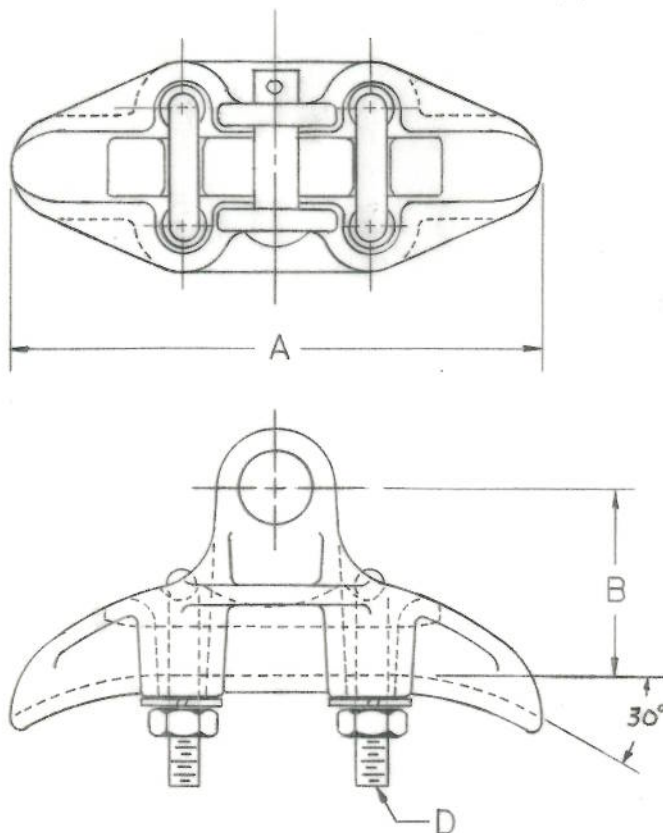


CATALOG NUMBER	CLAMPING RANGE (IN.)	ULTIMATE STRENGTH	DIMENSIONS IN INCHES				
			A	B	C	D	P
FSC-46	.16-.46	16,000	5 ⁵ / ₈	2	1 ¹ / ₁₆	1/2	5/8
FSC-60	.20-.60	17,000	6 ³ / ₈	2	7/8	1/2	5/8
FSC-70	.30-.70	18,000	6 ³ / ₈	2 ³ / ₈	1 ⁵ / ₁₆	1/2	5/8
FSC-83	.40-.83	18,000	6 ³ / ₄	2 ³ / ₈	1	1/2	5/8
FSC-105-N	.40-1.05	25,000	8	2 ³ / ₈	1	1/2	5/8
FSC-119	.70-1.19	25,000	8 1/4	2 3/4	1 1/4	1/2	5/8

NOTES

- 1) BODY & KEEPER : DUCTILE IRON, GRADE 604512, HOT DIP GALV.
- 2) CLEVIS PIN : STEEL, GRADE 5, HOT DIP GALV.
- 3) U-BOLTS & HARDWARE : STEEL, GALV.
- 4) COTTER PIN : STAINLESS STEEL
- 5) BNK SUFFIX INDICATES BOLT, NUT, AND COTTER PIN

CONTINENTAL ELECTRIC COMPANY
BIRMINGHAM, ALABAMA

IRON SUSPENSION CLAMP

3	ADD. FSC-119	5-25-88	AG
2	ADD. FSC-105-N	2-10-88	L.M.
1	REDRAWN-WAS CEB-1260	4-16-86	JSG
NO.	REVISION	DATE	BY

DRAWN BY: JSG	CHECKED BY: VEP	APPROVED BY: VEP
DATE: 4-16-86		DRAWING NO: CEA-2211