



FIBERGLASS TANGENT ARMS

ALUMA-FORM®

FTA18 Series

Material Specifications

Pole Gain



- 6061-T6 Aluminum Pole Gain with 8", 10", & 12" mounting centers

- Accepts 5/8" mounting hardware

- Can be banded using the Aluma-Form Bolt-A-Band™ banding system

Fiberglass Tube

- 3-5/8" X 4-5/8" Super-Smooth™, proprietary veiled gray polyester tube with added ultraviolet protection

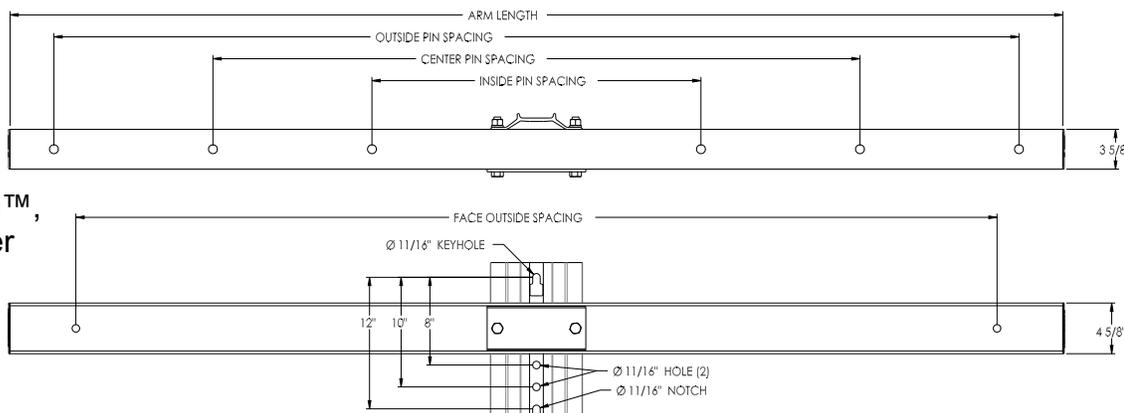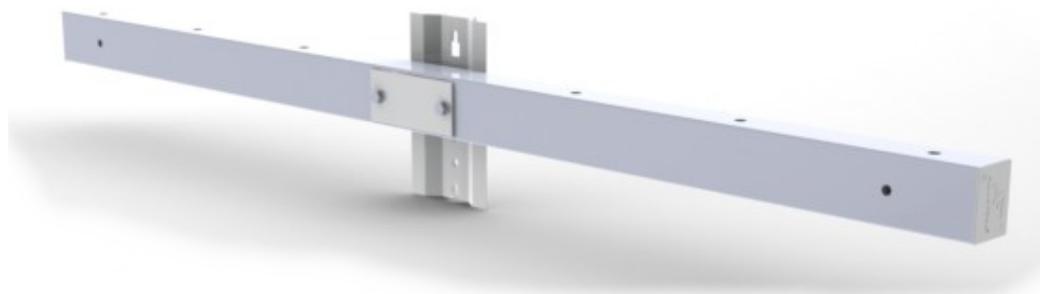

Catalog Name	Balanced Vertical Load per side	Length	Face Hole Diameter	Face Hole Spacing	Insulator Pin Positions	Phase hole diameter (Top)	Inside	Center	Outside	Deflection per 1000 lbs	Weight
FTA18-4-60-A	3650	60	11/16"	48	4	11/16"	23	-	52	0.3	22
FTA18-4-96-A	3650	96	11/16"	84	4	11/16"	30	-	88	0.59	33
FTA18-6-96-A	3650	96	11/16"	84	6	11/16"	30	59	88	0.59	33
FTA18-6-120-A	3000	120	11/16"	108	6	11/16"	38	75	112	0.59	50

Notes:

1. Custom drilling available, contact factory or local sales representative.