
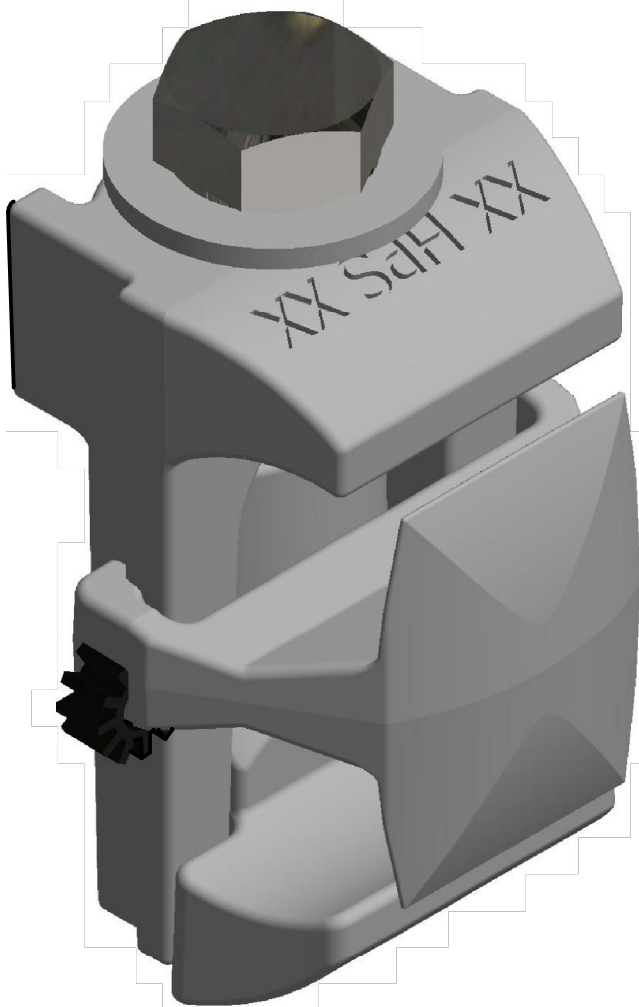
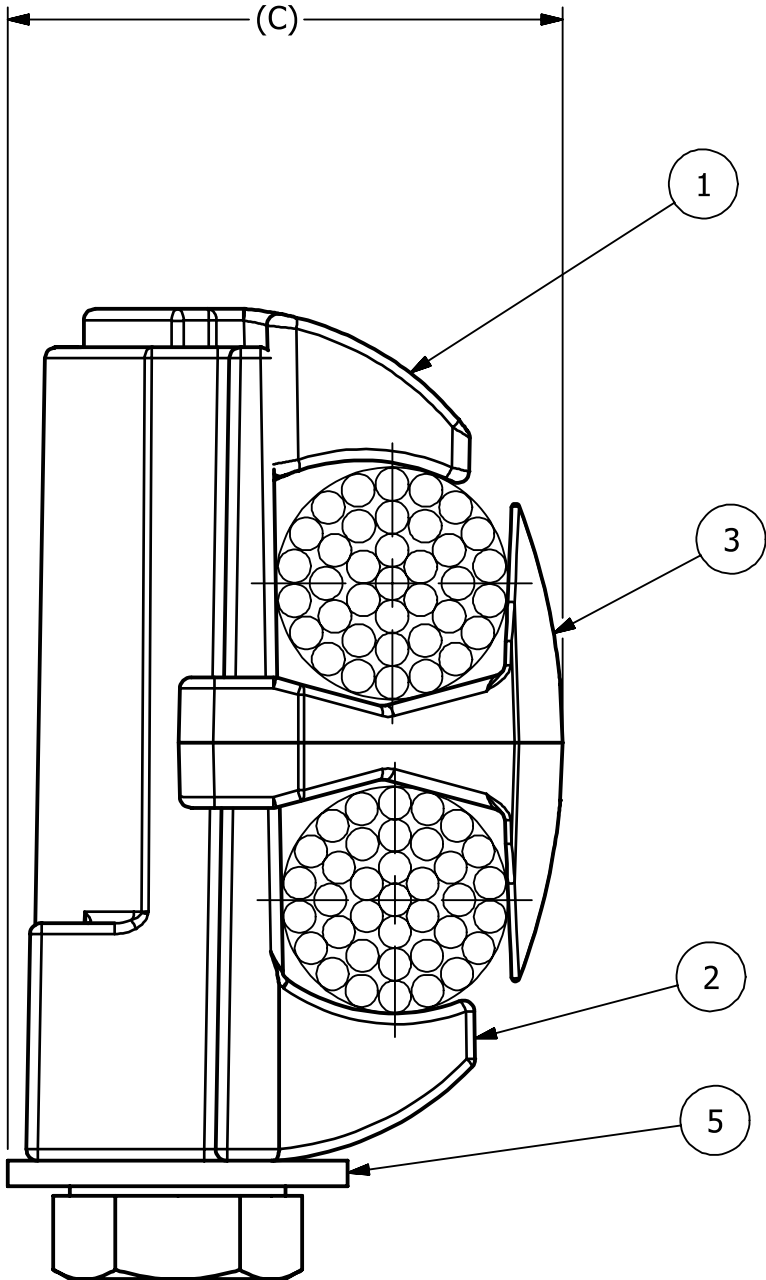


4					3			
CATALOG NUMBER	CONDUCTOR RANGE SOL. (MIN.- MAX.)	DIM A	DIM B	DIM C	HARDWARE BOLT HEAD (HEX.)	BOLT SIZE	APPROX. WT. EACH LB. [KG]	STANDARD PACK
GC8002GL*	#8 - #2	1 3/8 [34.99]	11/4 [31.81]	7/8 [22.27]	9/16 [14.32]	5/16 [7.95]	.16 [.07]	50
GC8010GL*	#8 - 1/0	1 1/2 [38.18]	13/8 [34.99]	1 [25.45]	9/16 [14.32]	5/16 [7.95]	.24 [.11]	50
GC8020GL*	#8 - 3/0	1 3/4 [44.54]	13/8 [34.99]	11/8 [28.63]	9/16 [14.32]	5/16 [7.95]	.33 [.15]	25
GC8040GL*	#6 - 4/0	2 3/8 [60.44]	11/2 [38.18]	11/2 [38.18]	9/16 [14.32]	3/8 [9.54]	.62 [.28]	50

ITEM	DESCRIPTION	MATERIAL
1	MALE CASTING	BRONZE
2	FEMALE CASTING	BRONZE
3	SPACER	BRONZE
4	BOLT	STAINLESS STEEL
5	WASHER	STAINLESS STEEL
6	GROMMET	NEOPRENE

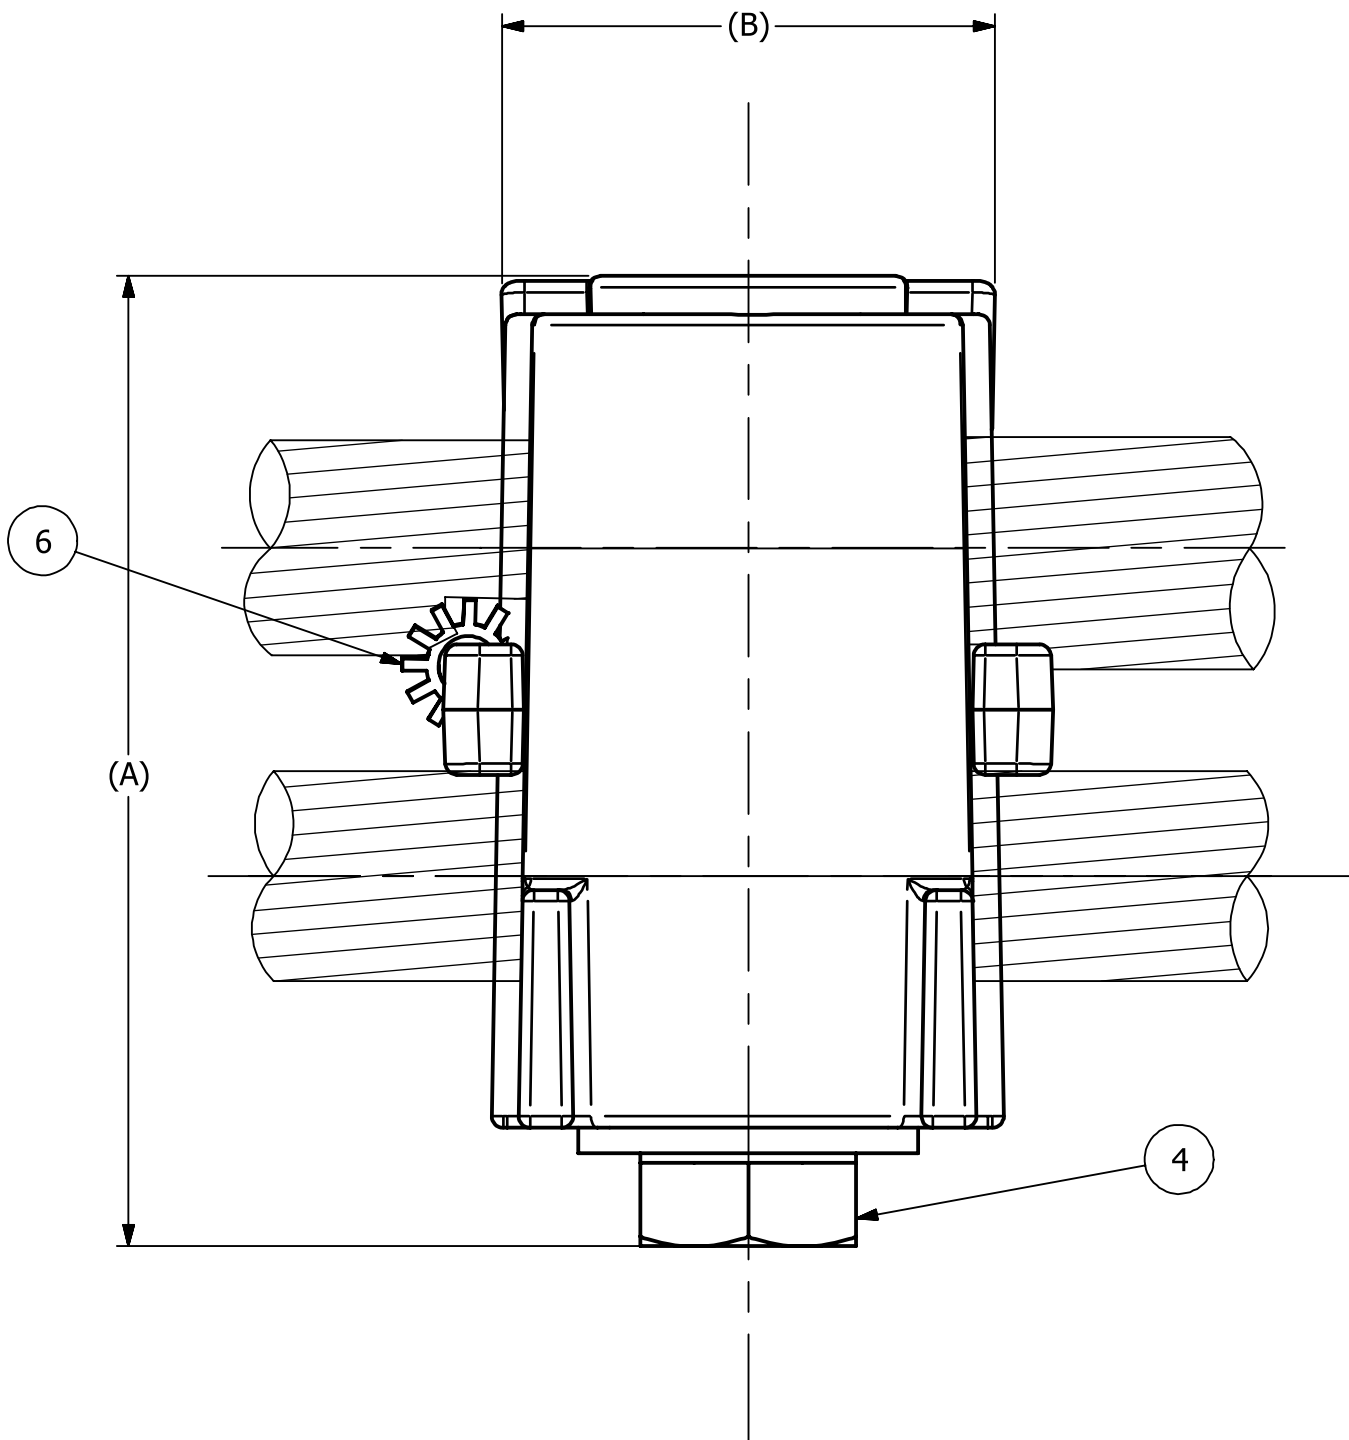

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. DISTANCE IN. [MM], FORCE: LBS-Force [kN], TORQUE IN. LBS. [N.m], & WEIGHT LBS. [KG].
2. RATINGS:
 - A. RECOMMENDED TORQUE: 5/16 HARDWARE - 180 IN.LBS [20.34]
3/8 HARDWARE - 240 IN.LBS [27.12]
3. CERTIFICATIONS, SPECIFICATIONS & STANDARDS:
 - A. * RUS LISTED.
 - B. ANSI C119.4
4. A SUFFIX IS ADDED TO THE CATALOG NUMBER TO DESIGNATE THE REQUIRED FITTINGS AS SHOWN IN THE TABULATION (EXAMPLE:GC8040GL) :
"G" - GROMMETS
"L" - FACTORY INHIBITED AND BAGGED
"P" - TIN PLATED CASTINGS

230822032798	08/22/23	BM	SI	AS	 THIRD ANGLE PROJECTION	 HUBBELL POWER SYSTEMS, Inc.				
EC #	DATE	CHANGED BY	CHECKED BY	APPROVED BY		TITLE PARALLEL CONNECTOR CU, GROOVE VISE, TYPE GC80XX.				
DESCRIPTION: TEMPLATE UPDATED ONE GROMMET REMOVED -- -- -- ADDITIONAL COMMENTS: -				WEIGHT, LBS SEE TABLE		CATALOG NUMBER: SEE TABLE				
				CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS		SIZE C	DWG NO. CC-25843	PART / ASSY NO. SEE TABLE	REV 1	
						SCALE: 2 : 1		DRN BY: ADD	DATE: 11/06/18	SHEET 1 OF 1