
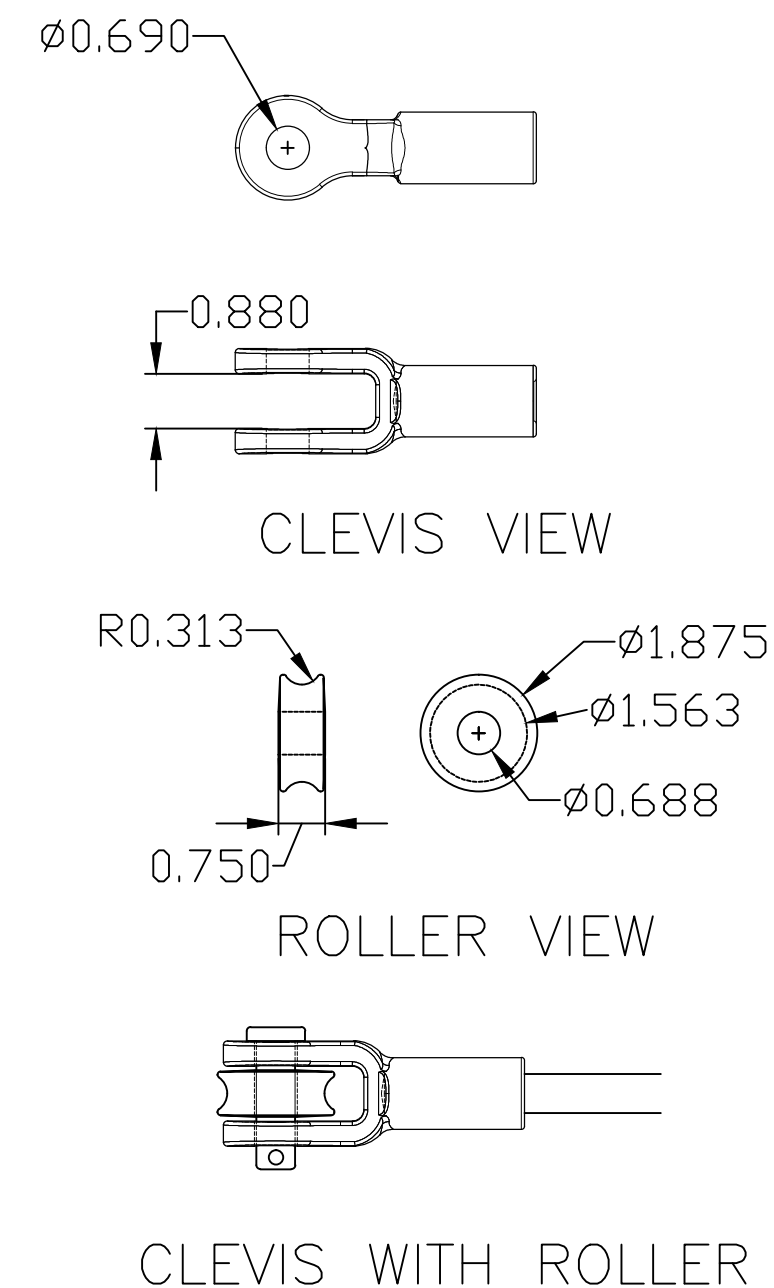


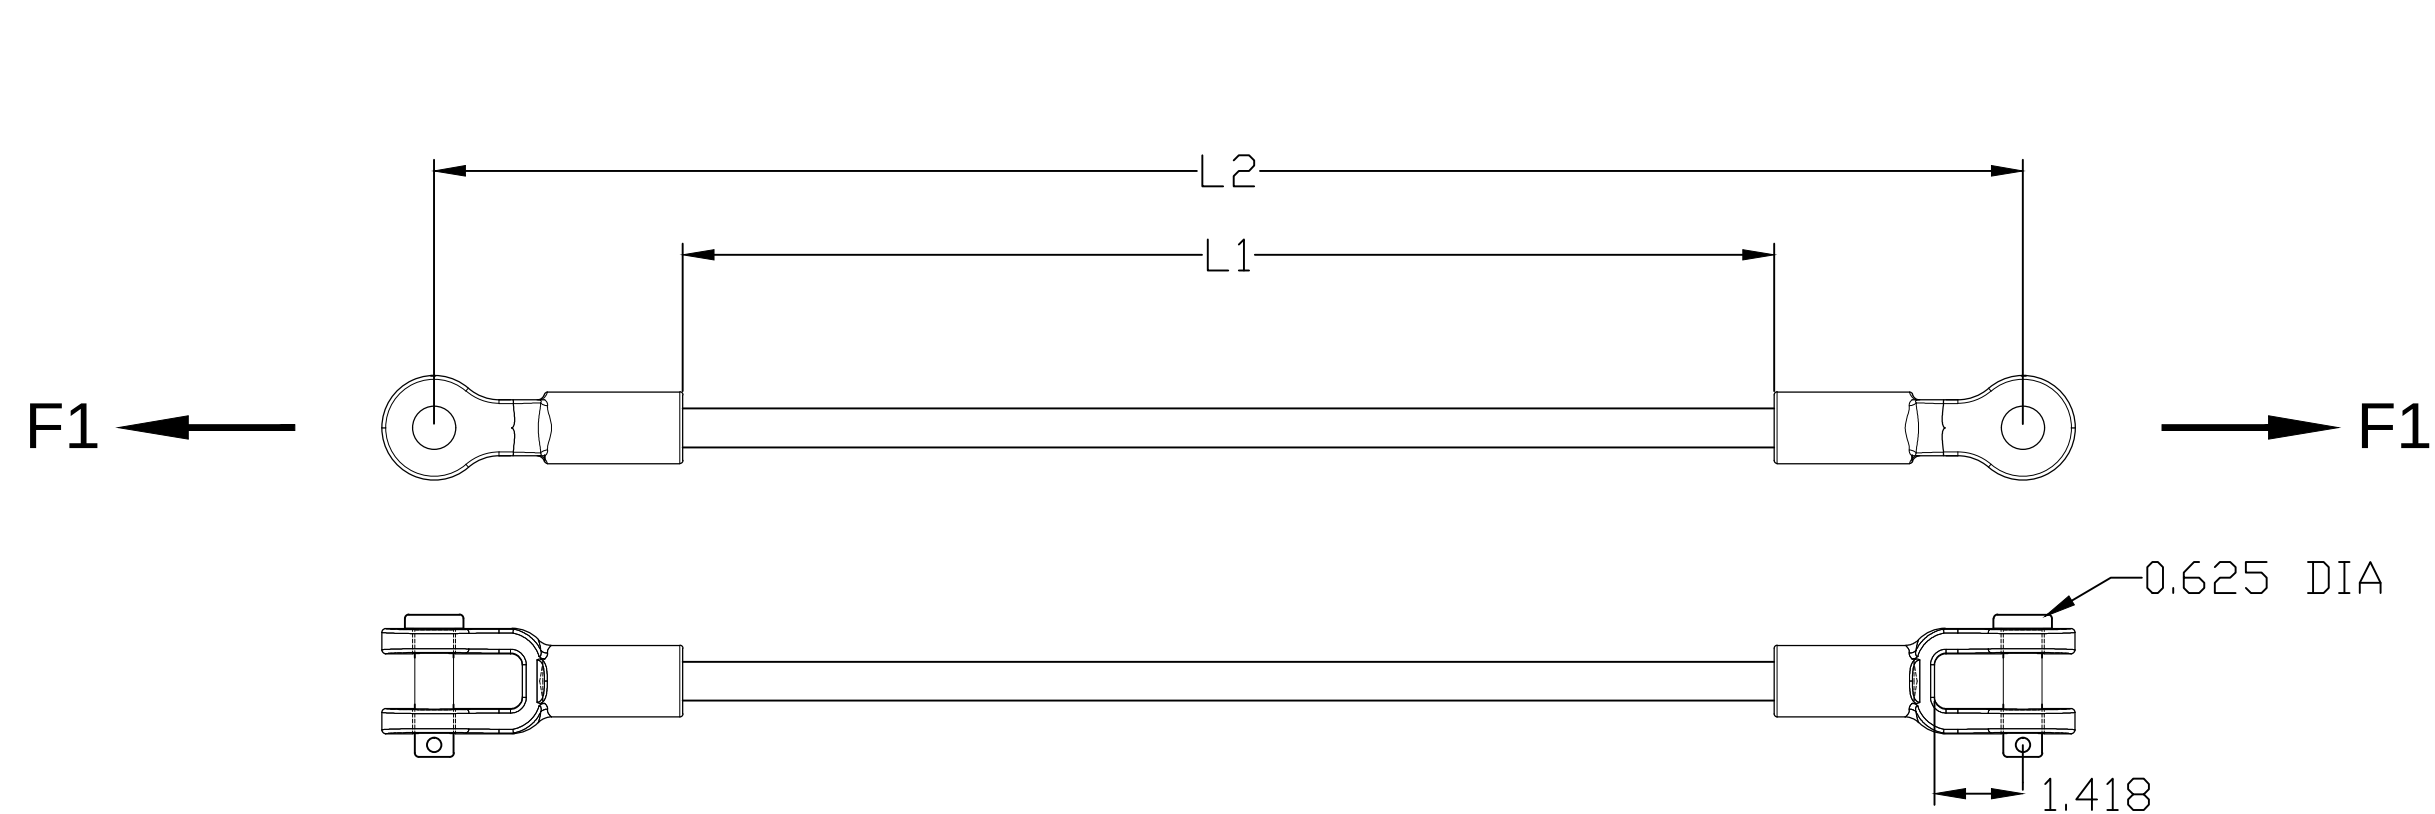

CATALOG NUMBER	LENGTHS (IN)		ULTIMATE STRENGTHS	ELECTRICAL WITHSTAND	
	L1	L2	TENSILE, LBS (F1)	DRY, kV	WET, kV
GCC21-12	12	20.000	21,000	90	45
GCC21-18	18	26.000	21,000	135	67.5
GCC21-24	24	32.000	21,000	180	90
GCC21-30	30	38.000	21,000	225	112.5
GCC21-36	36	44.000	21,000	270	135
GCC21-42	42	50.000	21,000	315	157.5
GCC21-48	48	56.000	21,000	336	180
GCC21-50	50	58.000	21,000	375	187.5
GCC21-54	54	62.000	21,000	405	202.5
GCC21-60	60	68.000	21,000	450	225
GCC21-78	78	86.000	21,000	585	292.5
GCC21-90	90	98.000	21,000	675	337.5
GCC21-96	96	104.000	21,000	720	360
GCC21-108	108	116.000	21,000	810	405
GCC21-120	120	128.000	21,000	900	450
GCC21-144	144	152.000	21,000	1080	540

NOTE: ADDED SUFFIX "R" FOR ONE ROLLER AND "R2" FOR TWO ROLLERS.
EX. GCC21-24R FOR ONE OR GCC21-24R2 FOR TWO ROLLERS.
ADDED SUFFIX "SC" INDICATES SILICONE COATED RUBBER FIBERGLASS ROD. EX. GCC21-24RSC
ADDED SUFFIX "C10" INDICATES IT IS STACKED 100 PER PALLET.
ADDED SUFFIX "USA" INDICATES 'MADE IN USA' STICKER IS REQUIRED.

- NOTES:
- 1.0 MATERIAL
 - 1.1 END FITTING - DUCTILE IRON 654512
 - 1.2 ROD - FIBERGLASS
 - 1.3 CLEVIS PIN - STEEL (EQUIVALENT TO SAE GRADE 5)
 - 1.4 COTTER KEY - STAINLESS STEEL
 - 2.0 FINISH
 - 2.1 END FITTING - HOT DIP GALVANIZED PER ASTM-A-153
 - 2.2 ROD - ULTRAVIOLET PROTECTIVE VEIL COATING, GRAY
- SILICONE COATED RUBBER FIBERGLASS ROD, GRAY
FOR "SC" OPTION
 - 2.3 CLEVIS PIN - HOT DIP GALVANIZED PER ASTM-A-153
 - 2.4 COTTER KEY - NONE
 - 3.0 DIMENSIONS IN INCHES

NO.	DATE	DESCRIPTION	BY
REVISIONS			
 MacLean Power Systems BIRMINGHAM , ALABAMA			
DRAWN BY: LMV		APPROVED BY: WCL CHECKED BY: WCL	SCALE: 1:1
GCC21-"L1", R, R2 SERIES 21K GUY STRAIN INSULATOR CLEVIS - CLEVIS END FITTING			
DATE: 03/23/12		DRAWING NO: CEB-3830	R/0