



## CROSSARM GIN

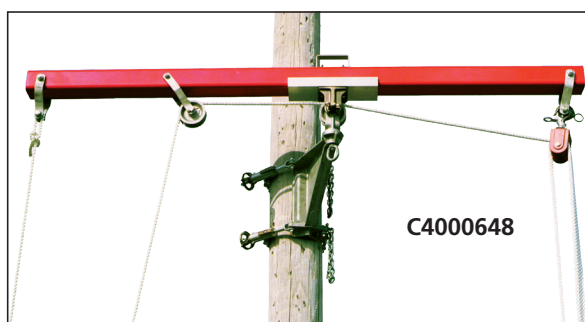

The gin beam can be rotated in a half circle, swinging the load away from underbuild obstructions. Rocker-action of the beam, up to 60°, controls distance of the load from the pole.

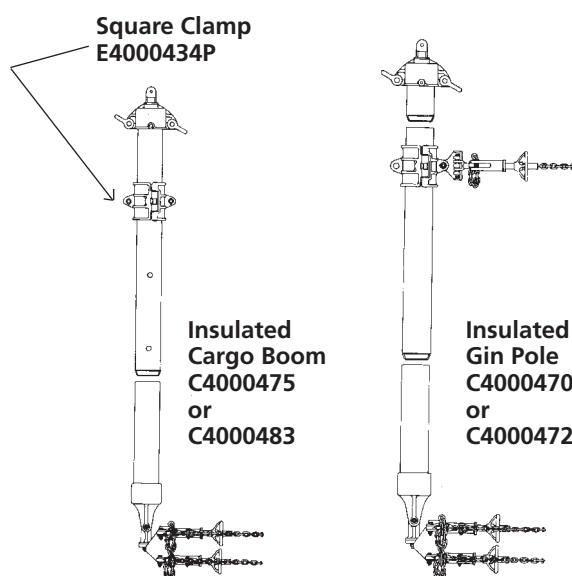

## Features & Applications

- Yoke casting fits over distribution crossarms, allowing gin to be used with rope blocks
- Can also be used with rope blocks or handline to lift conductors from their insulators
- Removable cadmium-plated steel pin provides adjustment for crossarm from 3-1/2" x 4-1/2" up to 4-3/4" x 5-3/4"
- Convertible model fits up to 6" x 6" crossarm

## Safety Considerations

- At 30° maximum angle from vertical, 44" gin has rated working load including pull force of 750 lbs.
- 500 lb. 56" gins are not intended for side-pull applications on hoist line or load line
- Lines to be within 5° of vertical

Catalog No.	Description	Weight
H20	44" Crossarm Gin	10 lb./4.5 kg.
T4000870	56" Crossarm Gin	12 lb./5.5 kg.
T4001708	Convertible 44" Crossarm Gin	10 lb./4.5 kg.

## MULTI-DUTY GIN

- Gin clamps at top of pole to lift heavy equipment
- Gin can be mounted lower on pole without changing mounting bracket to avoid obstructions
- Sturdy 4" x 4" Epoxiglas® beam gives unit a 2000 lb. load rating
- With beam removed, mounting bracket can be used by itself for hanging transformers
- Maximum rating of gin bracket is 2500 lbs.

Catalog No.	Description	Weight
C4000648	Multi-Duty Gin, Complete	70 lb./31.5 kg.
C85W	Mounting Bracket with Wheel Tightener	17 lb./7.7 kg.

## INSULATED GIN POLE/CARGO BOOM

**Insulated Gin Pole** is equipped with three chain tighteners which can be mounted to the pole to give lifting capacities of 5,000 pounds.

- Top casting is fitted with two clevises for convenience in loading.
- Placing a pole clamp in the swivel lug allows use of wire tong for stabilizing the gin.

**Insulated Cargo Boom** is rated at 1,000-pound capacity.

- Center casting can be adjusted to three possible positions for guy loading the tool.
- Base mounting is hinged to permit pivoting of the tool from horizontal upward 90° to vertical and will also swivel a full 180°, depending upon the proximity to the structure.
- Casting at the top is the same as on the Insulated Gin Pole.

Cat. No.	Description	Weight
C4000470	8' Gin Pole/Chain Binders	74 lb./33.3 kg.
C4000472	12' Gin Pole/Chain Binders	90 lb./40.5 kg.
C4000475	16' Cargo Boom/Chain Binders	100 lb./45 kg.
C4000483	16' Cargo Boom/Tower Binders	96 lb./43.2 kg.