

Hot-Line Clamps

Hot-line clamps built for all seasons.

HLC™ Hot-Line Clamps (Protected Thread)

- Eyebolt coated with grease to ensure easy turning in all weather conditions
- Built for general/copper applications and available for a wide conductor range



CAT. NO.	BODY	FOR WIRE COMBINATION	CONDUCTOR RANGE			
			MAIN		TAP	
			ACSR	AWG OR KCMIL	ACSR.	AWG
HLC2108*	Bronze	Copper to Copper	—	2/0-#8	—	2/0
HLC2108P	Plated Bronze	General Purpose	2/0-#6	2/0-#8	2/0-#6	2/0-#8
HLC2108AP9	Plated Aluminum	General Purpose	2/0-#6	2/0-#8	2/0-#6	2/0-#8
HLC3974	Bronze	Copper to Copper	—	400-#6 sol.	—	4/0-#6 sol.
HLC3974P	Plated Bronze	General Purpose	—	400-#6 sol.	3/0-#6	4/0-#6 sol.
HLC3974AP	Plated Aluminum	General Purpose	397.5-#6	400-#6 sol.	3/0-#6	4/0-#6 sol.

* RUS Accepted.


Note: For oxide-inhibitor option, add "-9" suffix to the catalog number.



Reliable performance for years to come.

PGH™ Center-Bolt Parallel-Groove Hot-Tap Clamps

- Tight, secure fittings to positively secure main and tap wires
- Catalog numbers ending with 9 are prefilled with oxide inhibitor to prevent oxidation and keep out moisture

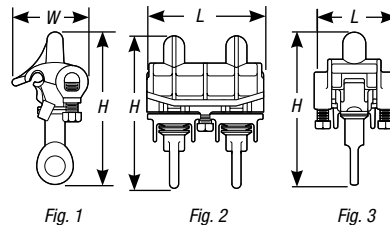

STD. CAT. NO.	PREFILLED CAT. NO.	CONDUCTOR RANGE				CONDUCTOR DIAMETER (IN.)				CENTER BOLTS			DIMENSIONS (IN.)		
		MAIN		TAP		MAIN		TAP		NO.	DIA.	FIG.	W	H	L
		ACSR	AWG OR KCMIL	ACSR	AWG	MAX.	MIN.	MAX.	MIN.						
—	PGH29	2/0-#8	2/0 str.-#8 sol.	1/0-#8	1/0 str.-#8 sol.	.447	.128	.398	.128	1	1/2	1	2 3/8	5 3/4	2 3/8
PGH4	PGH49	397.5-#6, 2/0-#6	450-#4 sol.	3/0-#6	4/0 str.-#6 sol.	.781	.198	.528	.162	1		1	3 3/16	6 3/16	2 1/16
—	PGH69	397.5 1/2-#2 AR	1000-4/0 str.	266-#6	300-#6 sol.	1.152	.522	.657	.162	2		2	4	6 3/4	4 1/4
—	PGH6129*	874-4/0, 397.5 1/2-#2 AR	1000-4/0 str.	266-#6	300-#6 sol.	1.152	.522	.657	.162	1	3	3 3/8	6 3/4	3 1/16	

Copper Clamps

PGH3	PGH39	—	2/0 str.-#8 sol.	—	2/0 Str.#8 sol.	.419	.419	.128	.128	1	7/16	1	2 3/8	5 1/4	1 1/4
------	-------	---	------------------	---	-----------------	------	------	------	------	---	------	---	-------	-------	-------

* PGH6129 has two hex-head bolt and pressure pad tap conductor retainers.

AR — with Armor Rod.

Note: Copper clamps are for use on copper conductors only.