


## KK4A40U4N, AL Universal Terminal, 4-Conductor, 4-Hole

By Burndy

Catalog # [KK4A40U4N](#)

Aluminum Universal Terminal, 4 Conductor, 4 Hole, 300-800 kcmil, 1/2" Stud, 1.75" Stud Hole Spacing, 8 Screws, Al/Cu Rated, Tin Plated

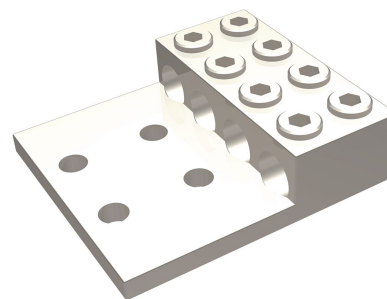

### Features

- Dual rated panelboard lugs constructed from high strength extruded aluminum alloy, electro tin-plated to provide low contact resistance

### Application

For Aluminum and Copper Conductors

### Specifications

Certification - UL Recognized	No
Buy American Compliant	Yes
Certification - cULus	No
EU RoHS Indicator	No
Buy America(n) Qualified	<ul style="list-style-type: none"> <li>Buy America Compliant (All status valid till December 2026)</li> <li>Buy American Act Compliant (All status valid till December 2026)</li> <li>BABA Compliant (All status valid till December 2026)</li> </ul>
Industry Standard(s)	UL 486A-486B
Certification - ETL	No
Standards - Industry Standards Met	UL 486A-486B
Standards - RoHS Compliance Status	NC
Certification - UL Listed Direct Burial	No
UL Listed	Yes
Certification - CSA Approved	Yes

### Conductor

Number Of Wires	4
Conductor - AL Str Size	<ul style="list-style-type: none"> <li>300 kcmil</li> <li>336 kcmil</li> <li>350 kcmil</li> <li>397 kcmil</li> <li>400 kcmil</li> <li>450 kcmil</li> <li>477 kcmil</li> <li>500 kcmil</li> <li>550 kcmil</li> <li>556 kcmil</li> </ul>

- 600 kcmil
- 636 kcmil
- 650 kcmil
- 700 kcmil
- 715 kcmil
- 750 kcmil
- 795 kcmil
- 800 kcmil

Conductor - AL Str Size Range	300-800 Kcmil
Conductor Size	300-800 KCMIL
Number Of Conductors	4
Conductor Type	<ul style="list-style-type: none"> <li>CU C Str-Size</li> <li>AL C Str-Size</li> </ul>
Conductor - Copper Str Size Range	300-800 Kcmil

### Configuration

Physical Attribute - Number of Holes	4
Connector Type	Parallel Set-Screw

### Dimensions

Dimension - Pad Width inch	6.04 in
Dimension - Height mm	47.8 mm
Dimension - Height inch	1.89 in
Dimension - E Spacing between Holes fraction	1-3/4 in
Dimension - F Width Center to Center inch	1.75 in
Dimension - L Length Overall mm	157 mm
Dimension - Hole Size mm	14 mm
Dimension - Hole Size inch	0.56 in
Dimension - Stud Size inch	0.56 in
Dimension - Bolt Hole Size inch	0.56 in
Dimension - Bolt Size fraction	1/2
Dimension - N inch	0.63 in
Dimension - Length Overall inch	6.19 in

### General

Material - Hardware Plated	Aluminum Y
Sub Brand	UNIVERSAL TERMINAL
UPC	781810601099

Type	Bolted Lugs & Terminals	Minimum Pack Quantity	1
Material	Aluminum	Pallet Quantity	6
Plating Type	Tin Plated	Carton Quantity	6
UPC 14 Digit GTIN	00781810601099		

## Logistics



A Hubbell brand

## Product Assets

[Catalog \[English\]](#)

© 2026 Hubbell Incorporated. All rights reserved  
BRDY-KK4A40U4N-SPEC-EN | REV 5/2026