





AMP RATING

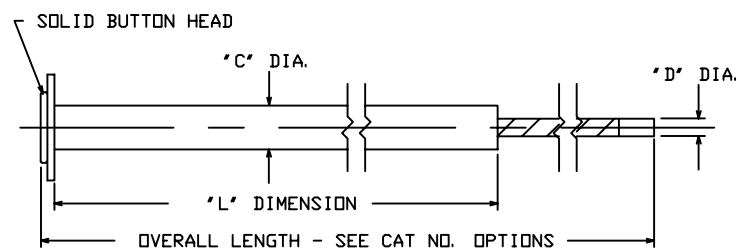

AMP RATING

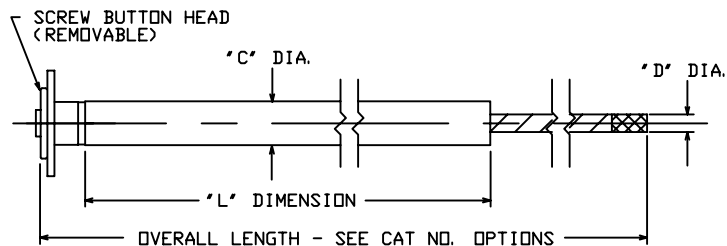

CATALOG NUMBERING DESCRIPTION

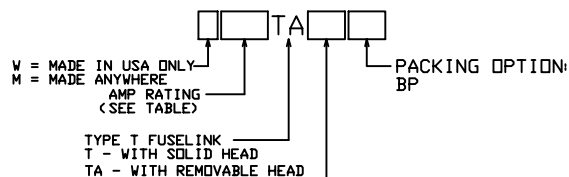

V = MADE IN USA ONLY
M = MADE ANYWHERE
AMP RATING
(SEE TABLE)

TYPE T FUSELINK
T - WITH SOLID HEAD
TA - WITH REMOVABLE HEAD

PACKING OPTION:
BP

OPTIONS:
FOR TA TYPE FUSELINKS
W/SUFFIX 23 = 23" LG (OVERALL LENGTH)
W/NO SUFFIX (BLANK) = 26" LG (OVERALL LENGTH)
W/SUFFIX 31 = 31" LG (OVERALL LENGTH)
FOR T TYPE FUSELINKS
W/SUFFIX 23 = 23" LG (OVERALL LENGTH)
W/SUFFIX 26 = 26" LG (OVERALL LENGTH)
W/SUFFIX 31 = 31" LG (OVERALL LENGTH)

CATALOG NUMBER EXAMPLE



AMP RATING	'A' DIA	'B' DIA	'C' DIA	'D' DIA	'L' DIM
1 THRU 20	.50	.75	.311	.090	5-1/2
25	.50	.75	.311	.125	5-1/2
30 THRU 50	.50	.75	.311	.141	5-1/2
65	.75	----	.431	.203	5-1/2
80 THRU 100	.75	----	.431	.234	5-1/2
140	1.00	----	.460	.290	6
200	1.00	----	.563	.406	6

CHANCE TOLERANCE CHART

EC 73858 DTD 5/17/18

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL POWER SYSTEMS			
FUSE LINKS, TYPE T			
SOLID & REMOVABLE HD			
SIZE	DWG NO.	CAT / PART / ASSY NO.	REV
C	PSSATFUSELINK	SEE CHART	A
DO NOT SCALE THIS DRAWING	DRN BY CLARK	DATE 04-02-07	SHEET 01 OF 01