



**Type M3C Single-Insulator Disconnect Switch**

• 15.5 and 27 kV max. • 600 and 900 Amperes

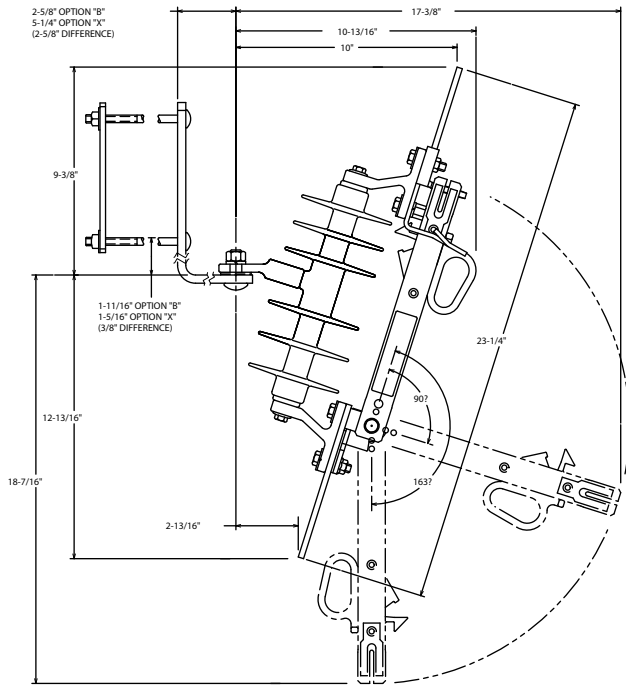

15.5 kV max. (110 kV LIW)

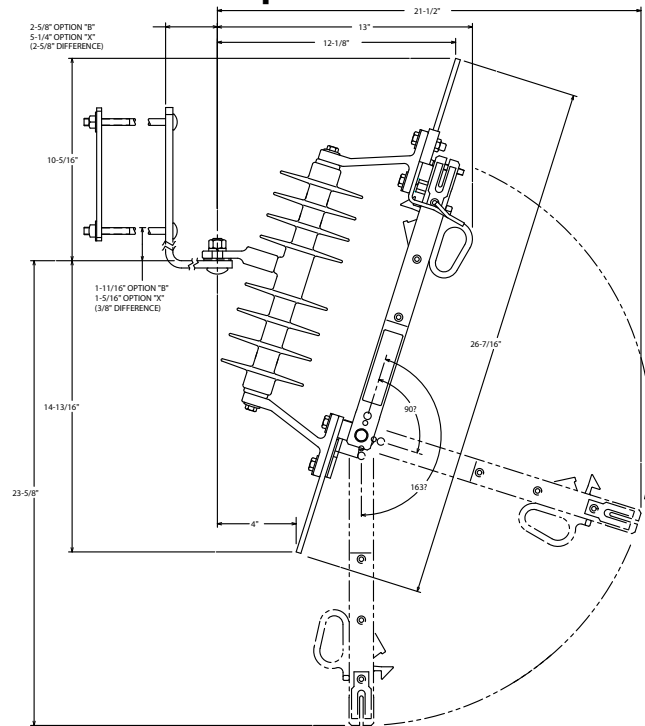

27 kV max. (125 kV LIW)

**Ordering Information — CATALOG NUMBER SYSTEM**



**M3C SWITCH**

Type M3 Switch live parts  
Type C-Polymer Cutout insulator

**OPTIONS**

**B = NEMA "B" Mounting Bracket**  
For crossarm (1½" bolt)


**C = Captive Hardware\***  
Consists of 4 each: ½" 13 stainless steel bolts, ½" flatwasher/lockwasher, ½" 13 bronze nut

**D = "D" Mounting Bracket**  
D-shape bracket for pole mount


**P = Parallel Groove Terminals\***  
(Cat. No. ACT1343, 2 per switch)  
Two complete connectors and hardware. Accepts #2 - 500 kcmil (Copper or Aluminum)

**X = Extended Mounting Bracket**  
For crossarm, horizontal section is 2⅝" longer than Type B bracket


**\*NOTE:** Captive Hardware and Parallel Groove Terminals CANNOT be ordered together.



TERMINAL PADS DETAIL



OPTION "C"  
CAPTIVE HARDWARE  
CONSIST OF 4 EACH: 1/2" STAINLESS STEEL BOLTS, LOCKWASHERS, & NUTS




OPTION "P"  
PARALLEL GROOVE TERMINALS


CONSIST OF 2 EACH: CONNECTORS & HARDWARE FOR #2-500 KCMIL COPPER OR ALUMINUM CONDUCTOR

**SWITCH RATING**  
15 = 15.5 kV max. (110 kV LIW)  
25 = 27 kV max. (125 kV LIW)


**CURRENT RATING**  
6 = 600 Amp  
9 = 900 Amp with 25 kV only



OPTION "B"  
NEMA "B" BRACKET



OPTION "D"  
"D" BRACKET



OPTION "X"  
EXTENDED BRACKET

